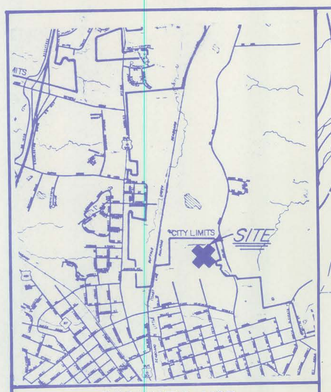

VICINITY MAP
(NTS)

N

NOTE: APPROX 21 AC. TO BE SEEDED, LIMED, FERTILIZED, ETC.

NOTE: WINDROWS 8-11 WILL NOT BE USED FOR ACTIVE COMPOST.

WILL BE USED FOR STOCKPILING OF MATURE COMPOST ONLY.

REVISED: 12/02/98

SEABOARD

COLONY ROAD

SR 1419

C.L.

TEMP. ROCK CHECK DAM

18" CMP BARREL W/ 24" CMP RISER

FUTURE EXPANSION

SEDIMENT BASIN (APPROX. 100' W. x 220' L.) (SEE DETAIL-C)

OVERFLOW AREA

ADDITIONAL WINDROWS

GREENWAY (35' W. x 300' L.)

GRINDING & STAGING AREA

6' CHAIN LINK FENCE (TYP.)

BUILDING (18' x 12')

TEST HOLES FOR GROUND WATER DEPTH (TYP.)

BUILDING (36' x 36')

PROPOSED GRADE (TYP.)

EXIST. GRADE (TYP.)

WINDROWS AREA * (SEE NOTE)

TEMP. GRAVEL CONST. ENTRANCE

EXIST 8" WATERLINE

14' WIDE GRAVEL RD. (TYP.) (SEE DETAIL-B-)

20' GRAVEL RD. (TYP.)

15" RCP

36" RCP

18" RCP

24" RCP (INCLUDED W/ GRADING (TYP.)

LOADING RAMP

SIGNS

OUTLET PROTECTOR (TYP.)

8" WATERLINE (BY OTHERS)

20' PAVED RD. (BY OTHERS)

SIGN LOCATION

SERVICE CENTER FACILITY

EXIST 8" WATERLINE

BASEBALL FIELD

THIRD STREET

NORTH STREET

333.8 336.5 342.3 389.2 412.4 413.0 416.3 410.3 408.4 412.2 406.4 405.6

B-28.0792

DESIGN BY: V.I.C.
DRAWN BY: J.J.B.
CONTRACTOR:
REVISIONS 3/18/92
8/04/97

SCALE: 1" = 100'
HORIZONTAL: NONE
VERTICAL: NONE
DATE: 2/19/92

CITY OF SANFORD
DEPARTMENT OF ENGINEERING
P.O. BOX 338 SANFORD, N.C. 27330

PROJECT:
CITY OF SANFORD COMPOST FACILITY
SITE PLAN/PROCESS FLOW DIAGRAM

NORTH CAROLINA PROFESSIONAL SEAL 15385 ENGINEER VICTOR IRWIN

2/19/92