

Permit No.	Scan Date	DIN
8505-INDUS-	April 6, 2016	25902

RECEIVED

March 25, 2016

Solid Waste Section
Asheville Regional Office

OPERATIONS PLAN

APPROVED DOCUMENT

Division of Waste Management

Solid Waste Section

Date March 29, 2016 By

Duke Energy Carolinas, LLC Belews Creek Steam Station Flue Gas Desulfurization (FGD) Residue Landfill Phase 1 Stokes County, North Carolina

Permit No. 8505


March 24, 2016



Prepared for:
Duke Energy Carolinas, LLC
526 South Church Street
Charlotte, North Carolina 28202



Prepared by:
Joyce Engineering, Inc.
2211 W. Meadowview Road, Suite 101
Greensboro, NC 27407

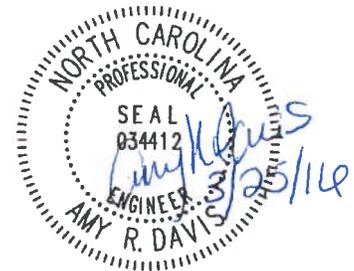

Amy Davis, P.E.
Senior Project Consultant
Joyce Engineering, Inc.
North Carolina Corporate Lic: C-0782

Description of Revisions

The following table provides a brief description of the revisions to the Operations Plan. The Operations Plan was originally submitted to the North Carolina Department of Environment and Natural Resources (DEQ) on September 30, 2005. Comments from DEQ on the subsequent modification submittals were provided in letters from Mr. Larry Frost, DEQ, to Mr. Ed Sullivan, P.E., Duke Energy Carolinas, LLC, and can be found in Appendix E.

<i>Revision</i>	<i>Date of Document</i>	<i>Description of Revisions</i>
Initial Issue	January 24, 2008	Initial issuance of document.
Revision 1	August 5, 2011	Landfill Operations Plan Section 3.0 Dust Control Plan <ul style="list-style-type: none"> • Added dust control plan and two figures Section 4.0 Chimney Drain System <ul style="list-style-type: none"> • Added chimney drain system design and description and appendices
Revision 2	March 23, 2012	FGD landfill leachate system modification allowing penetrations to remain
Revision 3	March 24, 2016	Revised Section 2.1.2 Waste Acceptance, Disposal, and Screening Requirements to include Duke Energy Carolinas, LLC Added Sections: 2.1.6.3 Vacuum Truck waste 2.1.6.4 Geotextile Waste, and 2.1.6.5 Mining of Waste

Table of Contents

1.0	General Facility Operations	1
1.1	Overview	1
1.2	Contact Information	1
1.3	Safety	1
1.4	Access and Security Requirements	1
1.5	Operating Hours	2
1.6	Signs	2
1.7	Training	2
1.8	Record Keeping	2
1.9	Design Drawings.....	3
2.0	Operations Management	3
2.1	Waste Handling and Landfill Sequencing	3
2.1.1	Landfill Capacity	3
2.1.2	Waste Acceptance, Disposal, and Screening Requirements.....	4
2.1.3	Dust, Litter, Odor, and Vector Control	4
2.1.4	Fire Control	5
2.1.5	Landfill Sequencing.....	5
2.1.6	Waste Placement	5
2.1.7	Compaction Requirements	8
2.1.8	Cover Requirements.....	8
2.1.8.1	Operational Cover	8
2.1.8.2	Intermediate Cover	8
2.1.8.3	Final Cover	8
2.2	Leachate and Contact Stormwater Management	9
2.3	Leachate Collection System (LCS).....	9
2.3.1	LCS Maintenance	9
2.3.2	LCS Record Keeping and Sampling	10
2.3.3	Contingency Plan	10
2.4	Stormwater Collection and Conveyance.....	10
2.4.1	Stormwater Discharge	10
2.5	Contact and Non-Contact Water Basin Maintenance Requirements	10
2.6	Groundwater Monitoring Well Access Requirements	11

2.7	Landfill Gas Management	11
3.0	Erosion and Sedimentation Control	11
3.1	E&SC Measures Monitoring and Maintenance	11
3.2	Surface Erosion Monitoring	12
4.0	Vegetation Management.....	12
4.1	Temporary Seeding.....	12
4.2	Permanent Seeding	13
5.0	Landfill Closure	14
6.0	Required Regulatory Submittals	14

Tables

1. List of Construction Drawings

Appendices

Appendix I	Dust Control Plan
Appendix II	Phasing Drawings (developed and provided by WSP Sells, dated August 2, 2006)
Appendix III	Closure/Post-Closure Plan
Appendix IV	Chimney Drain System
Appendix V	Leachate Storage Basin Leak Detection System
Appendix VI	NCDEQ Communications

- Letter from Mr. Larry Frost, DEQ to Mr. Ed Sullivan, P.E., Duke Energy Carolinas, LLC, dated July 1, 2011, Permit to Operate, Modification, Changes to the Approved Plans, Completeness Determination and Technical Review, Belews Creek Steam Station Flue Gas Desulfurization (FGD) Residue Landfill, Permit # 8505, Stokes County, DIN 14257
- Letter from Mr. Larry Frost, DEQ to Mr. Ed Sullivan, P.E., Duke Energy Carolinas, LLC, dated March 26, 2012, Drawing OP-5, Cell Operation – Leachate Collection and Removal System – Revision Approval, Duke Energy of the Carolinas, Belews Creek Steam Station, FGD Residue Landfill, Stokes County, Permit # 8505, DIN 16354

1.0 General Facility Operations

1.1 Overview

The purpose of this Operations Plan is to provide a plan for the safe and efficient operations of the Belews Creek Steam Station (BCSS) Flue Gas Desulfurization (FGD) Residue Landfill (BCSS FGD Landfill). This Operations Plan presents the operational requirements for: 1) General Facility Operations, 2) Operations Management, 3) Erosion and Sedimentation Control, and 4) Vegetation Management, along with guidance for Landfill Closure and Required Regulatory Submittals. This Operations Plan was prepared consistent with 15A NCAC 13B .1626 Operational Requirements for MSWLF Facilities rules.

The BCSS FGD Landfill is owned and operated by Duke Energy Carolinas, LLC (Duke). The landfill is located in Stokes County, North Carolina on Duke property, south of the Belews Creek Steam Plant, between the east and west arms of Belews Creek Lake near Walnut Cove.

1.2 Contact Information

Correspondence and questions concerning the operation of the BCSS FGD Landfill should be directed to the appropriate entity as follows:

Owner

Duke Energy Carolinas, LLC—Belews Creek Steam Station
3195 Pine Hall Road, Belews Creek, North Carolina 27009
(336) 445-0746

Facility Contact: CCP O&M Station Sponsor (Construction Specialist or System Owner or Environmental Professional)

State Regulatory Agency

North Carolina Department of Environmental Quality
Division of Waste Management, Solid Waste Section
Asheville Regional Office
2090 US Highway 70, Swannanoa, North Carolina 28778
(828) 296-4500

Environmental Engineer: Larry Frost

1.3 Safety

Landfill operations at the BCSS FGD Landfill were developed considering the health and safety of the facility's operating staff. The operating staff is provided with site-specific safety training prior to landfill operations, and on-site activities are to be conducted according to the applicable sections of Duke's Safe Work Practices.

1.4 Access and Security Requirements

The BCSS FGD Landfill is located entirely within Duke property. Security for the site is currently in place, consisting of fencing, gates, berms, wooded buffers, and security check stations. Unauthorized

vehicle access to the site is prevented around the landfill property by security check stations, woods, fencing, gates, and stormwater conveyance features.

The access road to the site is of all-weather construction and will be maintained in good condition. Potholes, ruts, and debris on the road(s) will receive timely attention in order to avoid damage to vehicles.

1.5 Operating Hours

The BCSS FGD Landfill is open seven days a week, as needed to support plant operations.

1.6 Signs

A sign providing the landfill permit number, and a statement reading, “NO HAZARDOUS OR LIQUID WASTE PERMITTED,” is posted at the site entrance and shall be maintained in good condition.

Directional signs are placed along the access road to the landfill and shall be maintained in good condition at all times.

Edge-of-waste markers are installed to delineate the edge of waste. These markers shall be maintained in good condition and remain visible at all times.

1.7 Training

Due to the diversity and nature of job tasks required at the BCSS FGD Landfill, personnel shall be adequately trained to handle facility operations and maintenance.

The Station Sponsor for Landfill Operations shall have a general understanding of all the tasks required for site operations. Individuals performing the various tasks shall have adequate training for the site-specific tasks they are assigned. Duke shall provide annual training for facility personnel.

Noteworthy operations and maintenance tasks to be addressed in training include:

- Maintaining accurate records of waste loading (quantitative and qualitative)
- Operating requirements for stormwater segregation from exposed waste areas
- Operating and maintaining the leachate collection system (LCS)

All training will be documented and training records will be kept on-site. The Station Sponsor for Landfill Operations will complete operator training courses in accordance with the permit requirements.

1.8 Record Keeping

An operating record is to be maintained on-site and include the following records:

- Leachate Collection System (LCS)—Line Cleanout and Camera Monitoring Documentation
- Stormwater Maintenance and Inspection Logs
- Erosion and Sedimentation Control Inspection Logs
- Periodic Landfill Inspection Reports

- Maintenance and Repair Logs
- Dust Control Plan Monitoring Worksheets (included in the Dust Control Plan);
- Groundwater Monitoring (and Sampling) Documentation
- Operations Plan

The above records are to be kept in the operating record for the active life of the BCSS FGD Landfill and the post-closure care period. Information contained in the operating record must be furnished upon request to the North Carolina Department of Environment and Natural Resources Division of Waste Management, Solid Waste Section (Division) or be made available for inspection by the Division. Additional records kept on-site should include:

- Solid waste facility permits
- Record of the amount of solid waste received summarized on a monthly basis based on scale records
- Regulatory agency inspection reports
- Permit-to-Construct Application
- Employee training program and records
- Landfill drawings and specifications

1.9 Design Drawings

A list of the landfill design drawings is provided in Table 1. The drawings provide the location of landfill features, landfill construction details, and technical design and construction notes.

2.0 Operations Management

The primary objective of operations management at the BCSS FGD Landfill is to dispose of waste material in compliance with permit conditions while operating in a safe manner. Landfilling operations will generally proceed from the east toward the west and have a working face size based on the operator's discretion, with waste in other areas covered with intermediate cover as appropriate. In general, landfill operations in the cell will initially proceed in 10-foot lifts with cells divided by stormwater segregation berms; and once the cell floor has been covered with the initial lift of waste, the chimney drains will be installed.

2.1 Waste Handling and Landfill Sequencing

2.1.1 Landfill Capacity

The BCSS FGD Landfill Phase I was permitted to operate on January 24, 2008. The Phase 1 footprint consists of approximately 22.6 acres. The landfill began receiving waste in early March 2008. The total available airspace volume of Phase 1, according to the Construction Plan Application dated April 19, 2006, is approximately 1.50 million cubic yards. This volume corresponds to 1,701,000 tons of capacity

based on an average unit weight of 84.0 pounds per cubic foot. The expected annual quantity of waste to be placed in the landfill is up to 300,000 tons per year. Due to gypsum sales demands combined with the potential for limited plant production, mining of gypsum may limit the net amount of landfilled material per year. This includes the potential for a negative fill rate if sales outpaces production and material is mined from the landfill (See section 2.1.6.5 for mining operations).

2.1.2 Waste Acceptance, Disposal, and Screening Requirements

The BCSS FGD Landfill is permitted to accept the following waste types from Duke Energy Carolinas, LLC:

- Coal combustion products (CCPs) (including fly and bottom ash, pyrites and coal mill rejects, and boiler slag);
- Gypsum produced during the flue gas desulfurization (FGD) process;
- Waste water treatment sludge (WWTS) produced during the FGD process;
- Waste limestone material;
- Sand blast material;
- Waste coal; and
- incidental materials produced in coal facility operations

The landfill owner or operator shall notify the Division within 24 hours of attempted disposal of any wastes the landfill is not permitted to receive.

At a minimum, hazardous waste, yard trash, liquid wastes, regulated medical waste, sharps not properly packaged, polychlorinated biphenyls (PCB) waste as defined in 40 Code of Federal Regulations (CFR) 761, and wastes banned from disposal in North Carolina by General Statute 130A-309.10(f), must not be accepted at the landfill.

Asbestos waste will not be disposed of in the landfill.

The removal of waste from the landfill is prohibited without the owner or operator approval. Waste will be hauled and disposed of by dedicated and consistent operators from the waste source to the landfill.

Access to the interim waste storage location, haul routes, and landfill are restricted; therefore, no screening of waste is recommended.

2.1.3 Dust, Litter, Odor, and Vector Control

Litter, odors, and vectors are not anticipated to be concerns at the BCSS FGD Landfill. The waste placed in the landfill does not attract vectors, and windblown litter is not a problem other than some dusting. Odors are typically not a problem at FGD residue landfills.

Dust control is addressed in the *Dust Control Plan* included as Appendix I. Generally, dust control measures will be implemented when necessary and will include at a minimum watering of dusty roads and exposed work areas. The gypsum surface typically generates a crust, which reduces the dust potential for the gypsum. Additionally, intermediate cover will be vegetated as soon as is practical in order to minimize the blowing of dust on-site.

2.1.4 Fire Control

No open burning shall be permitted at the BCSS FGD Landfill. There are no explosive gas concerns with gypsum, ash waste, or mill rejects; therefore, the threat of fire is considered to be minimal.

Although it is unlikely, if a fire occurs at the landfill, the Station Control Room (phone number: 336-445-0521) shall be notified and equipment and stockpiled soil shall be provided to control accidental fires. Belews Creek Steam Station will notify the local fire department, which will be immediately dispatched to assist with fire control. Any fire that occurs at the landfill shall be reported to the Division within 24 hours and a written notification will be submitted within 15 days by the Station Sponsor for Landfill Operations.

2.1.5 Landfill Sequencing

The BCSS FGD Landfill will be developed in sequence from Cell 1 to Cell 4. The landfill Phasing Diagrams (Figures OP-1 through OP-4) are included in Appendix II and they illustrate a possible sequence of operations. The actual filling sequence, fill heights, and grades may be modified and the owner's discretion.

2.1.6 Waste Placement

Waste generated at the BCSS is transported from the interim waste storage areas to the landfill by using dump trucks.

- Gypsum - A conveyor system transports the gypsum from the FGD facility and stockpiles it adjacent to the BCSS FGD Landfill. The gypsum is then loaded onto dump trucks and hauled to the landfill active face, or taken off-site for sale.
- Fly Ash - A conditioning hopper is utilized to load fly ash into dump trucks and the fly ash is then hauled to the landfill active face.
- Bottom Ash, Mill Rejects, and Waste Water Treatment Sludge – These materials are loaded into dump trucks through the use of varying equipment and hauled to the landfill active face.

Upon reaching the active face of the landfill, the waste is dumped from the trucks. After the waste is dumped, the dump trucks exit the landfill and pass through a wheel wash system before returning to the interim waste storage areas. The interim waste storage areas, haul roads, and landfill are located within the secured BCSS facility. A minimum of 3 feet of waste material will be in place as a protective cushion over the liner system before vehicular or construction equipment is allowed on the liner.

The landfill surface shall be graded to promote surface water drainage to the contact water collection system. No waste shall be placed in standing water.

2.1.6.1 Fly Ash, Bottom Ash, and Gypsum

Fly ash, bottom ash, and FGD Gypsum shall be compacted using compactors and dozers in approximate 1-foot lifts to achieve a vertical operational lift thickness of 10 feet.

2.1.6.2 Wastewater Treatment

Sludge, waste limestone, waste coal, and sandblast material FGD clarifier sludge, coal mill rejects, waste limestone material, boiler slag, sand blast material, ball mill rejects, coal waste, wastewater sludge, and pyrites will be spread in 6-inch lifts in the center of the operational area and shall not be placed within 25 feet of the exterior slopes. FGD clarifier sludge shall be blended with the other waste (i.e. ash) prior to placement of the next fill lift. FGD clarifier sludge, coal mill rejects, waste limestone material, boiler slag, sand blast material, ball mill rejects, coal waste, and pyrites shall be compacted as densely as practical and specific monitoring. In-place density testing of these materials is not required.

2.1.6.3 Vacuum Truck Waste

Vacuum trucks are used to remove waste materials from the plant areas that consist of various permitted CCP. The origin of the vacuum truck waste materials is typically from various sumps, catch basins, wheel wash stations, and coal pile sumps located within the plant.

The moisture contents of the vacuum truck waste materials may vary considerably with the waste varying in consistency from a relatively dry state to a wet, fluid-like state depending on the amount of liquid present in the sumps or vacuumed areas. CCP material transported via vacuum truck will occur in a vacuum truck dedicated to Duke Energy operations or documentation will be obtained to ensure that the vacuum truck contains no human or other non-permitted waste streams. Vacuum truck waste could also mean similar waste material transported in smaller water tight units.

Vacuum truck waste shall consist of permitted waste materials. Non-permitted waste materials inadvertently included with the vacuum truck waste including but not limited to yard trash (paper, plastic, wood, aluminum, Styrofoam, etc.) shall be visually screened and immediately removed from the vacuum truck waste after the waste material is dumped in the operational area by vacuum contractor. The consistency of the vacuum truck waste may vary from a relatively dry state to a relatively wet, fluid-like state. Vacuum truck waste material shall be moisture conditioned by initial decanting excess moisture from the waste or by mixing the waste with fly ash, bottom ash, or gypsum materials depending on its consistency. The vacuum truck waste shall be placed and spread in maximum 6-inch lifts near the center of the operational area. The vacuum truck waste shall not be placed within 50 feet horizontally from exterior landfill slopes or within 50 feet of chimney drain structure locations. The vacuum truck waste material shall be thoroughly mixed with fly ash, bottom ash, or gypsum material during waste placement using a dozer or other similar grading equipment to provide additional moisture conditioning prior to compaction. In-place density testing of the vacuum truck waste materials is not required.

The vacuum contractor shall coordinate vacuum truck waste placement with landfill operator personnel and the vacuum truck waste disposal will be documented.

Dust control measures shall be provided for the vacuum truck waste in accordance with the Dust Control Plan outlined in Appendix I.

2.1.6.4 Geotextile Waste

General operations of coal combustion products (CCP) requires the use of porous geotextile material for dewatering, outlet protection, inlet protection, and air quality management. With this letter, Duke Energy requests approval to place incidental amounts of geotextile used in the management of CCP's into the respective facility's operational landfill.

Geotextile material shall be porous in nature and could include but is not limited to: silt bags, bag house bags, geotubes, and geotextile fabric specifically used to manage CCP material.

The geotextile material will be broken up with field equipment to the extent possible and immediately buried with a minimum of 6" CCP material or soil. Volumes of geotextile are intended as incidental to that of the CCP waste stream to the respective facilities.

2.1.6.5 Mining of Waste

The FGD Landfill contains mostly gypsum meeting specifications in various re-use markets. In order to meet industry demands, frequent mining of material occurs at the FGD landfill.

In order to protect the liner system and leachate components, mining from the FGD landfill will occur in designated areas with a minimum stand-off distance of:

- horizontal: 50'-0" from the landfill side slope or anchor trench
- vertical: 10'-0" vertical separation from the top of protective cover (drainage layer). The vertical separation layer typically consists of ash or other waste material.

Operators performing mining activities shall be oriented to specific operational tasks related to mining including but not limited to:

- liner location;
- FGD landfill grading plans;
- anchor trench location;
- vertical and horizontal liner separation requirements;
- stormwater management, and
- environmental awareness,

The landfill operators' mining equipment shall be equipped with horizontal and vertical tracking capabilities.

The landfill operator shall have a Mining Plan approved by Duke Energy. At a minimum, the mining plan shall include:

- base grade mining plan
- horizontal and vertical tracking
- operator orientation

Should the need for removal of gypsum from the FGD landfill extend below the horizontal and vertical extents described above, the owner will submit a detailed mining plan to the Division for approval.

2.1.7 Compaction Requirements

After the waste is dumped from the trucks and placed on the active face, the waste will be placed in consecutive, approximate 1-foot thick lifts that do not exceed a 10-foot operational lift. Prior to placement of a new lift, the existing waste surface should be scarified.

The waste shall be compacted using compactors and dozers and moisture conditioning shall be performed to meet the moisture requirements. The waste shall be compacted to an average of 95 percent of Standard Proctor maximum dry density, and within 5 percent of the optimum moisture content. Although not required, in-place density testing may be performed at the Owner's discretion to verify compaction requirements are achieved.

2.1.8 Cover Requirements

2.1.8.1 Operational Cover

Operational cover, consisting of soil, will be applied as needed for dust control and stormwater management. The operational cover may be applied at a thickness suited to its purpose. For example, the operational soil cover may be applied in thinner layers to provide dust control and it may be applied in thicker layers where protection from surface erosion is desired. Operational soil cover is not required, provided the Dust Control Plan included as Appendix I is followed.

2.1.8.2 Intermediate Cover

A 12-inch thick intermediate cover layer shall be placed on exterior slopes and areas where final grades have been reached. Intermediate cover material shall be free of protruding roots, stumps, and debris. Intermediate cover may not contain more than 5 percent gravel (particle sizes larger than 0.5 inches) by weight as determined by ASTM D422. Isolated rock fragments not exceeding 6 inches in diameter may be placed within the intermediate cover if completely surrounded by compacted soil if approved by the Engineer. Rock fragments shall not protrude more than 3 inches from the compacted intermediate cover fill surface. Soil shall be placed in maximum 6-inch thick compacted lifts. Intermediate cover will be seeded within 7 days in accordance with Erosion and Sediment Control requirements. Vegetation shall be removed and the intermediate cover soil shall be scarified or removed prior to placing any overlying waste.

2.1.8.3 Final Cover

The final cover system for the BCSS FGD Landfill will be completed within 180 days following the beginning of closure activities unless otherwise approved by the Division.

The final cover will consist of a compacted interim soil cover (on top of the waste), a geocomposite gas collection layer, 40-mil textured linear low density polyethylene (LLDPE) geomembrane liner, a geocomposite drainage layer, and a minimum of 2 feet of cover soil. The upper 6-inch vegetative layer will consist of on-site soil suitable for maintaining grass cover and controlling erosion. Surface water

that percolates through the 6-inch vegetative layer and 18-inch thick soil layer will drain through the geocomposite drainage layer. The final cover will be vegetated with native grasses within six months following closure.

See Closure/Post-Closure Plan in Appendix III for final cover specifications and maintenance and operations requirements.

2.2 Leachate and Contact Stormwater Management

A leachate collection system (LCS) is in place to drain the leachate within the active cell to the down-gradient leachate storage basin. On the cell floor area, a 12-inch thick layer of soil cover is over the geomembrane liner and the leachate collection and removal system.

Leachate and contact stormwater are collected in the leachate storage basin and routed by way of a pump station, located adjacent to the basin, to the BCSS Ash Basin, which discharges in accordance with the BCSS plant's National Pollutant Discharge Elimination System (NPDES) permit.

2.3 Leachate Collection System (LCS)

The leachate collection system consists of a geonet/geotextile with a perforated collection/header piping system that drains to the leachate storage basin. In order to better manage contact water, a chimney drain network has been designed to route leachate through the waste and out of the landfill through the existing leachate outfalls. Refer to Appendix IV for the design and description of the Chimney Drain System. The slope on the geomembrane is positive to promote leachate transport from the collection system to the leachate storage basin. The geonet is a polyethylene synthetic mesh that transmits leachate to the leachate collection pipe. The leachate collection header pipes drain directly to the leachate storage basin where a riser pipe routes leachate and contact stormwater to the BCSS Ash Basin. As waste placement proceeds, the leachate collection system will be modified as shown on the design drawings.

2.3.1 LCS Maintenance

The maintenance of the leachate management system's physical facilities (consisting of high-density polyethylene [HDPE] piping and the contact water storage basin) and records will be performed by or under the direct supervision of Duke. Visual observations of proper LCS system performance will be made monthly by Duke staff to verify that the LCS is performing properly.

In addition to the primary geomembrane basin liner, the lined leachate storage basin is equipped with a Leak Detection System (LDS), consisting of a secondary geomembrane liner and drainage system that drains to a sump, located on the south end of the basin. The purpose of this system is to detect and to collect liquids that may leak through the primary liner and to pump the liquid to the pump station. Refer to Appendix V for a description of the LDS and the response plan.

Clean-out pipes are located on the LCS leachate header pipes. LCS header pipes will be cleaned out by the use of a clean-out snake or high-pressure water flushing at least once a year and will be remote-camera monitored at least once every 5 years. The frequency of clean-out and camera inspections may be modified based on consecutive inspection results and observed operating conditions.

2.3.2 LCS Record Keeping and Sampling

Records will be maintained at BCSS documenting the leachate line cleanout and camera monitoring.

Leachate from the LCS will be sampled on a semi-annual basis.

2.3.3 Contingency Plan

In the unlikely event that leachate cannot be pumped to the active BCSS Ash Basin, leachate will be temporarily stored within the landfill until such time that draining operations to the active ash basin can be restored. In such an event, the Division shall be notified in writing, within 30 days, about the events and corrective actions taken.

2.4 Stormwater Collection and Conveyance

Stormwater that does not come in contact with waste will be treated as non-contact water. Non-contact stormwater runoff onto the landfill is prevented by diversion ditches around the landfill.

To improve operations, surface water should be diverted from the operational area. Excessive surface water at the working face creates difficulties for maneuvering equipment and prevents the operator from achieving maximum compaction of waste. To divert surface water runoff away from the working face, temporary diversion berms will be installed on the current lift, upslope of the working face and in other locations as dictated by the direction of grade. The area between the temporary berm and the working face should be sloped to the chimney drains, when practical, and graded to prevent any accumulation of water. The soil cover in the areas beyond the diversion berms will be uniformly graded and compacted to prevent the formation of erosion channels. In the event that channels do form, the cover should be promptly repaired.

Stormwater collection and conveyance measures will be checked regularly and maintained such that necessary repairs can be made as early as practical.

2.4.1 Stormwater Discharge

The stormwater system at the landfill was designed to help prevent the discharge of pollutants. Landfill operation shall not cause a discharge of pollutants into waters of the United States, including wetlands, that violates any requirement of the Clean Water Act, including, but not limited to NPDES requirements, pursuant to Section 402. In addition, under the requirements of Section 404 of the Clean Water Act, the discharge of dredged or fill material into waters of the state that would be in violation of the requirements shall not be allowed by landfill operations.

Operations at the landfill shall not cause the discharge of a non-point source of pollution to waters of the United States, including wetlands, that violates any requirement of an area-wide or statewide water quality management plan that has been approved under Section 208 or 319 of the Clean Water Act, as amended.

2.5 Contact and Non-Contact Water Basin Maintenance Requirements

All stormwater features (i.e., diversion ditches, berms, risers, discharge pipes, etc.) associated with Phase 1 until final closure will be inspected and documented monthly for signs of damage, settlement,

clogging, silt buildup, or washouts. If necessary, repairs to stormwater control features will be made as early as practical.

2.6 Groundwater Monitoring Well Access Requirements

Groundwater monitoring wells are located around the landfill perimeter. A readily accessible, unobstructed, path shall be maintained so that monitoring wells may be accessed by vehicles. Care must be taken around the wells to prevent any damage to the wells.

2.7 Landfill Gas Management

Because of the nature of the waste to be placed in the FGD Residue Landfill, Duke does not anticipate that methane or hydrogen sulfide gas will be generated or that odor will be an issue during operations. Therefore, landfill gas monitoring and management is not proposed.

A landfill gas venting system is provided as part of the engineered cover system.

3.0 Erosion and Sedimentation Control

Erosion and sedimentation control (E&SC) during operations consist of monitoring E&SC stormwater conveyance features and surface erosion.

3.1 E&SC Measures Monitoring and Maintenance

Adequate measures are to be practiced to prevent erosion in general accordance with E&SC measures included on Drawing No. BCM6451.00-0016.001 (FGD Residue Landfill), Drawing No. BCM6451.00-0017.001 (Stockpile Area) and Drawing No. BCM6451.00-0018.001 (FGD Landfill Erosion Control Details), all dated April 19, 2006 and prepared by Chas. H. Sells, Inc.

Erosion control measures include:

- Disturbing as little area as practical at any one time for landfilling operations
- Seeding/mulching of all disturbed areas commencing as soon as practically possible. Employing erosion netting or sod on steep slopes and other erosion prone areas.
- Use of earthen berms, hay bales, silt fences, riprap, or equivalent devices downgradient of disturbed areas, stockpiles, drainage pipe inlets and outlets, and at intervals along grassed waterways, until such time as permanent vegetation is established.

Erosion and sedimentation control structures include stormwater best management practice (BMP) systems, sediment basins, ash runoff basins, contact water conveyance zones, and channels. Stormwater BMP's, sediment basins, and ash runoff basins shall be checked after periods of significant rainfall. Sediment shall be removed from each structure when sediment accumulates to one half of the design depth. Sediment removal shall bring BMP's to their original design depth. The BMP's, sediment basins, embankments, spillways and outlets shall also be observed for erosion damage. Necessary repairs shall be made immediately. Trash or debris within the riser structures or outfalls shall be removed.

Channels shall be observed for damage after each runoff event. Riprap-lined channels and outlet protection aprons used to prevent damage to channel vegetation shall be observed for washouts. Riprap shall be added to these areas, as needed, to maintain the integrity of the structure.

Embankment slopes shall be periodically observed for erosion. The embankment slopes shall be mowed at least once a year. The embankment slopes shall be refertilized in the second year unless vegetation growth is fully adequate. Damaged areas shall be reseeded, fertilized and mulched immediately. Seeding, fertilizing, and mulching shall be in accordance with the North Carolina Erosion and Sedimentation Control Guidelines and in accordance with the active Erosion and Sediment Control Permit.

3.2 Surface Erosion Monitoring

Adequate erosion control measures shall be established to help prevent sediment from leaving the site. Channels will be observed once every seven days and after any rainfall event of 0.5 inches or greater within 24 hours.

Slopes will be periodically checked for erosion and vegetative quality, fertilized, and mowed. A slope or portion thereof shall be identified as needing maintenance if it meets any one of the following conditions:

- Exposed waste on exterior slopes
- Areas of cracking, sliding, or sloughing
- Areas of seepage

Slopes identified as needing maintenance shall be repaired as soon as practical and as appropriate to correct deficiencies. Repair activities may include re-dressing the slope, filling in low areas, and/or seeding.

4.0 Vegetation Management

Within six months after final termination of disposal operations at the site, the area shall be stabilized with vegetation as required by design drawings and Closure/Post-Closure Plan (Appendix III). Temporary seeding will be applied as required.

Temporary erosion control measures may be required until permanent cover is established. Mulching, until a vegetative cover is established, can stabilize areas where final grades have been reached. Soil mulching can be achieved using materials such as: wood chips, straw, hay, asphalt emulsion, jute matting, and synthetic fibers. Mulches allow for greater water retention; reduce the amount of runoff; retain seeds, fertilizer, and lime in place; and improve soil moisture and temperature conditions.

4.1 Temporary Seeding

Temporary seeding will be applied as follows (source: *NC Erosion and Sediment Control Planning and Design Manual* [June 2006, Revised March 2009]):

LATE WINTER TO EARLY SPRING

Seeds	Pounds Per Acre	Dates of Planting
Rye (grain)	120	January 1 to May 1
Annual lespedeza (kobe)	50	January 1 to May 1

Note: Omit lespedeza when duration of temporary cover is not to extend beyond June.

SUMMER

Seeds	Pounds Per Acre	Dates of Planting
German millet	40	May 1 to August 15

FALL

Seeds	Pounds Per Acre	Dates of Planting
Rye (grain)	50	August 15 to December 31

Soil Amendments	Pounds Per Acre
Agricultural limestone	2,000
Fertilizer (10-10-10)	1,000
Mulch	4,000

Note: Soil amendments are for all-season temporary seeding applications.

4.2 Permanent Seeding

Permanent seeding will be applied as follows (source: *NC Erosion and Sediment Control Planning and Design Manual* [June 2006, Revised March 2009]):

Seeds	Pounds Per Acre	Dates of Planting
Tall fescue	100	September 1 to April 15
Sericea lespedeza	15	September 1 to May 1
Kobe lespedeza	10	May 1 to September 1
Rye	40	August 15 to April 15

Soil Amendments	Pounds Per Acre
Agricultural limestone	4,000
Fertilizer (10-10-10)	1,000
Mulch	4,000

Note: Perform soil test to determine proper soil amendments; if not available, use the quantities above.

5.0 Landfill Closure

The BCSS FGD Landfill will be closed in accordance with the design drawings and Closure/Post-Closure Plan (Appendix III). The Closure/Post-Closure Plan outlines the sequence for closing the landfill and the post-closure maintenance activities. Closure is designed to minimize the need for long-term maintenance and to control the post-closure release of contaminants. Closure activities may be revised as appropriate for materials, specifications, technology advancements, or changes in regulations at the time the landfill is closed or in post-closure. In general, the landfill development is designed so that final cover can be established as soon as possible.

6.0 Required Regulatory Submittals

Submittal	Requirement	Reporting/Action Frequency
Groundwater Monitoring Reports	Maintain a record of all monitoring events and analytical data in accordance with the Groundwater Monitoring Plan. Reports of the analytical data for each water quality monitoring sampling event shall be submitted to NCDEQ Division of Waste Management (DWM) in a timely manner.	Semi-annually
Annual Tonnage Reports	Tons of waste received and disposed of in the landfill shall be reported to the DWM on forms prescribed by the DWM. Refer to the Permit to Operate for annual reporting requirement information.	Annually Must submit no later than August 1 each year
10-Year Waste Management Plan	Per North Carolina G.S. 130A-309.09D (c): <ul style="list-style-type: none"> • A 10-year waste management plan shall be developed for this landfill and submitted to DWM. • The plan shall be updated and submitted to DWM at least every three years. • A report on the implementation of the plan is required to be submitted to DWM by August 1 of each year. 	10-year plan prepared every 10 years 10-year plan updated every 3 years Implementation report annually

Appendix I

Dust Control Plan

INTRODUCTION AND SITE DESCRIPTION

This Dust Control Plan is for the Duke Energy's Belew's Creek Steam Station FGD (flue gas desulfurization) Residue Landfill. This Plan provides dust control methods for managing dust emissions at this site and provides a monitoring program and corrective action response to contain CCP's (coal combustion products) to prevent dust nuisances to employees and the public. The monitoring program will aid Duke Energy and the landfill operator in evaluating the dust control methods, or combination of dust control methods, that prove effective with site specific conditions.

The FGD Residue landfill has an approximate 22.6-acre footprint. Currently, this site is permitted to accept flue gas desulfurization (FGD) residue and will create a residue generally comprising of gypsum. This Plan will be added as an appendix to the approved Operations Plan for the FGD Residue Landfill.

DUST CONTROL METHODS

The primary potential source of dust emissions in the landfill is the top deck area and active area of waste placement. These areas are at a higher risk for producing dust due to vehicular and equipment traffic and earthworks-like construction. Exterior landfill slopes are less of a dust control concern as they have intermediate or operational soil covers which are vegetated as required in the Operations Plan.

Dust emissions from the landfill can be controlled through a variety of dust control methods. Possible dust control methods are identified herein. Dust control methods may be characterized as products and/or applications, structural wind breaks and/or covers, and operational methods.

Dust control methods for the landfill area include:

- Watering;
- Establishing vegetative cover;
- Mulching;
- Structural controls consisting of:
 - Wind breaks (i.e. fencing and/or berms); and
 - Temporary coverings (i.e. tarps);
- Spray applied dust suppressants consisting of, and not limited to:
 - Anionic asphalt emulsion;
 - Latex emulsion;
 - Resin in water;
 - Polymer based emulsion; and
 - Mineral mortar coatings (i.e. posi-shell);
- Calcium chloride;
- Soil stabilizers (i.e. soil cements);

- Operational soil cover;
- Modifying the active working area; and
- Modifying operations during dry and windy conditions.

The operator may use, and is not limited to, combinations of these dust control methods or any method that is technically sound to control dust for the specific site conditions. If the operator intends to use a dust control method not presented above, the proposed dust control method will be evaluated on a case by case basis to assess the effectiveness with specific site conditions. For the purposes of this Plan, operational soil cover will be defined as soil material applied at a suitable thickness to provide dust control. The effectiveness of the dust control methods implemented should be evaluated through a dust monitoring program outlined in Section 3.

Operational equipment generally consists of dump trucks, vibratory smooth drum roller, bulldozer, water truck, spray trailer, track hoe, and service truck. Operational equipment will be used to construct, install, apply, and/or repair dust control methods. The operator will make provisions to alleviate any on-site issues that arise when primary equipment is being maintained or is inoperable. In the event that Belew's Creek Steam Station FGD Residue Landfill is permitted to accept additional CCP's, the landfill operator will make provisions to have the necessary equipment to control multiple fugitive CCP residue dusting emission events.

MONITORING AND CORRECTIVE ACTION RESPONSE

This section describes a dust monitoring program and suggests corrective action responses should fugitive emissions be observed.

Monitoring

During landfill operations, a dust monitoring program will be implemented to evaluate the dust control measure performance and observe the areas for dust emissions. The dust monitoring program consists of performing visual observations of dust prone areas, dust control measures, and monitoring existing and forecasted weather conditions.

Dust emissions can occur under many conditions. For the purposes of this Plan, dust emissions are characterized as fugitive emissions, where FGD residue dust is located outside the limit of landfill waste. This is most likely to occur during windy, dry, and hot weather conditions. Therefore, the operator will monitor both existing and forecasted weather conditions and use dust control measures suited to the weather conditions. The dust control measures shall be implemented prior to the forecasted weather conditions.

Equipment operators shall continuously observe the active face and other areas within the landfill limit for dust emissions. In addition, preventative dust control measures should be observed and documented at least twice daily (morning and afternoon) when the landfill is in operation to evaluate the dust control measure performance. Additional observations may be necessary as site and weather conditions dictate. Observations will be documented on the attached "Monitoring Worksheet," or online database/worksheet, etc. Due to the continual

maintenance necessary on moisture conditioned and spray-applied areas, the operator shall pay particular attention to these areas. Structural controls shall be observed to monitor that they are achieving their intended purpose. Observations in the landfill area may be made with reference to the attached cells grid systems.

Monitoring will be conducted during times when the landfill is in operations. The operator shall continue to provide necessary dust control measures during periods when operations are inactive (i.e. outages, weekends, holidays). Operators are to establish appropriate measures so that dust emissions are not reasonably likely to occur during inactive operations periods when monitoring is not being conducted.



Corrective Action

If fugitive dust emissions are observed and observations indicate dust control measures are not achieving their intended purpose, then appropriate corrective actions will be taken. Dust control measures should be reapplied, repaired, or added, as necessary, to control dust emissions. The operator will construct, install, apply, and/or repair dust control measures prior to the end of the work day to control dust emissions during non-operating hours. The operator will implement dust control measures as preventative controls rather than in response to fugitive dust emissions.

REINFORCED CONCRETE HEADWALL
 NCDOT STD. 838.21
 INV. 733.37

PROJ. JUNCTION BOX
 INV. 735.44
 NCDOT STD. 838.21
 INV. 735.24



REINFORCED CONCRETE HEADWALL
 NCDOT STD. 838.21
 INV. 733.15

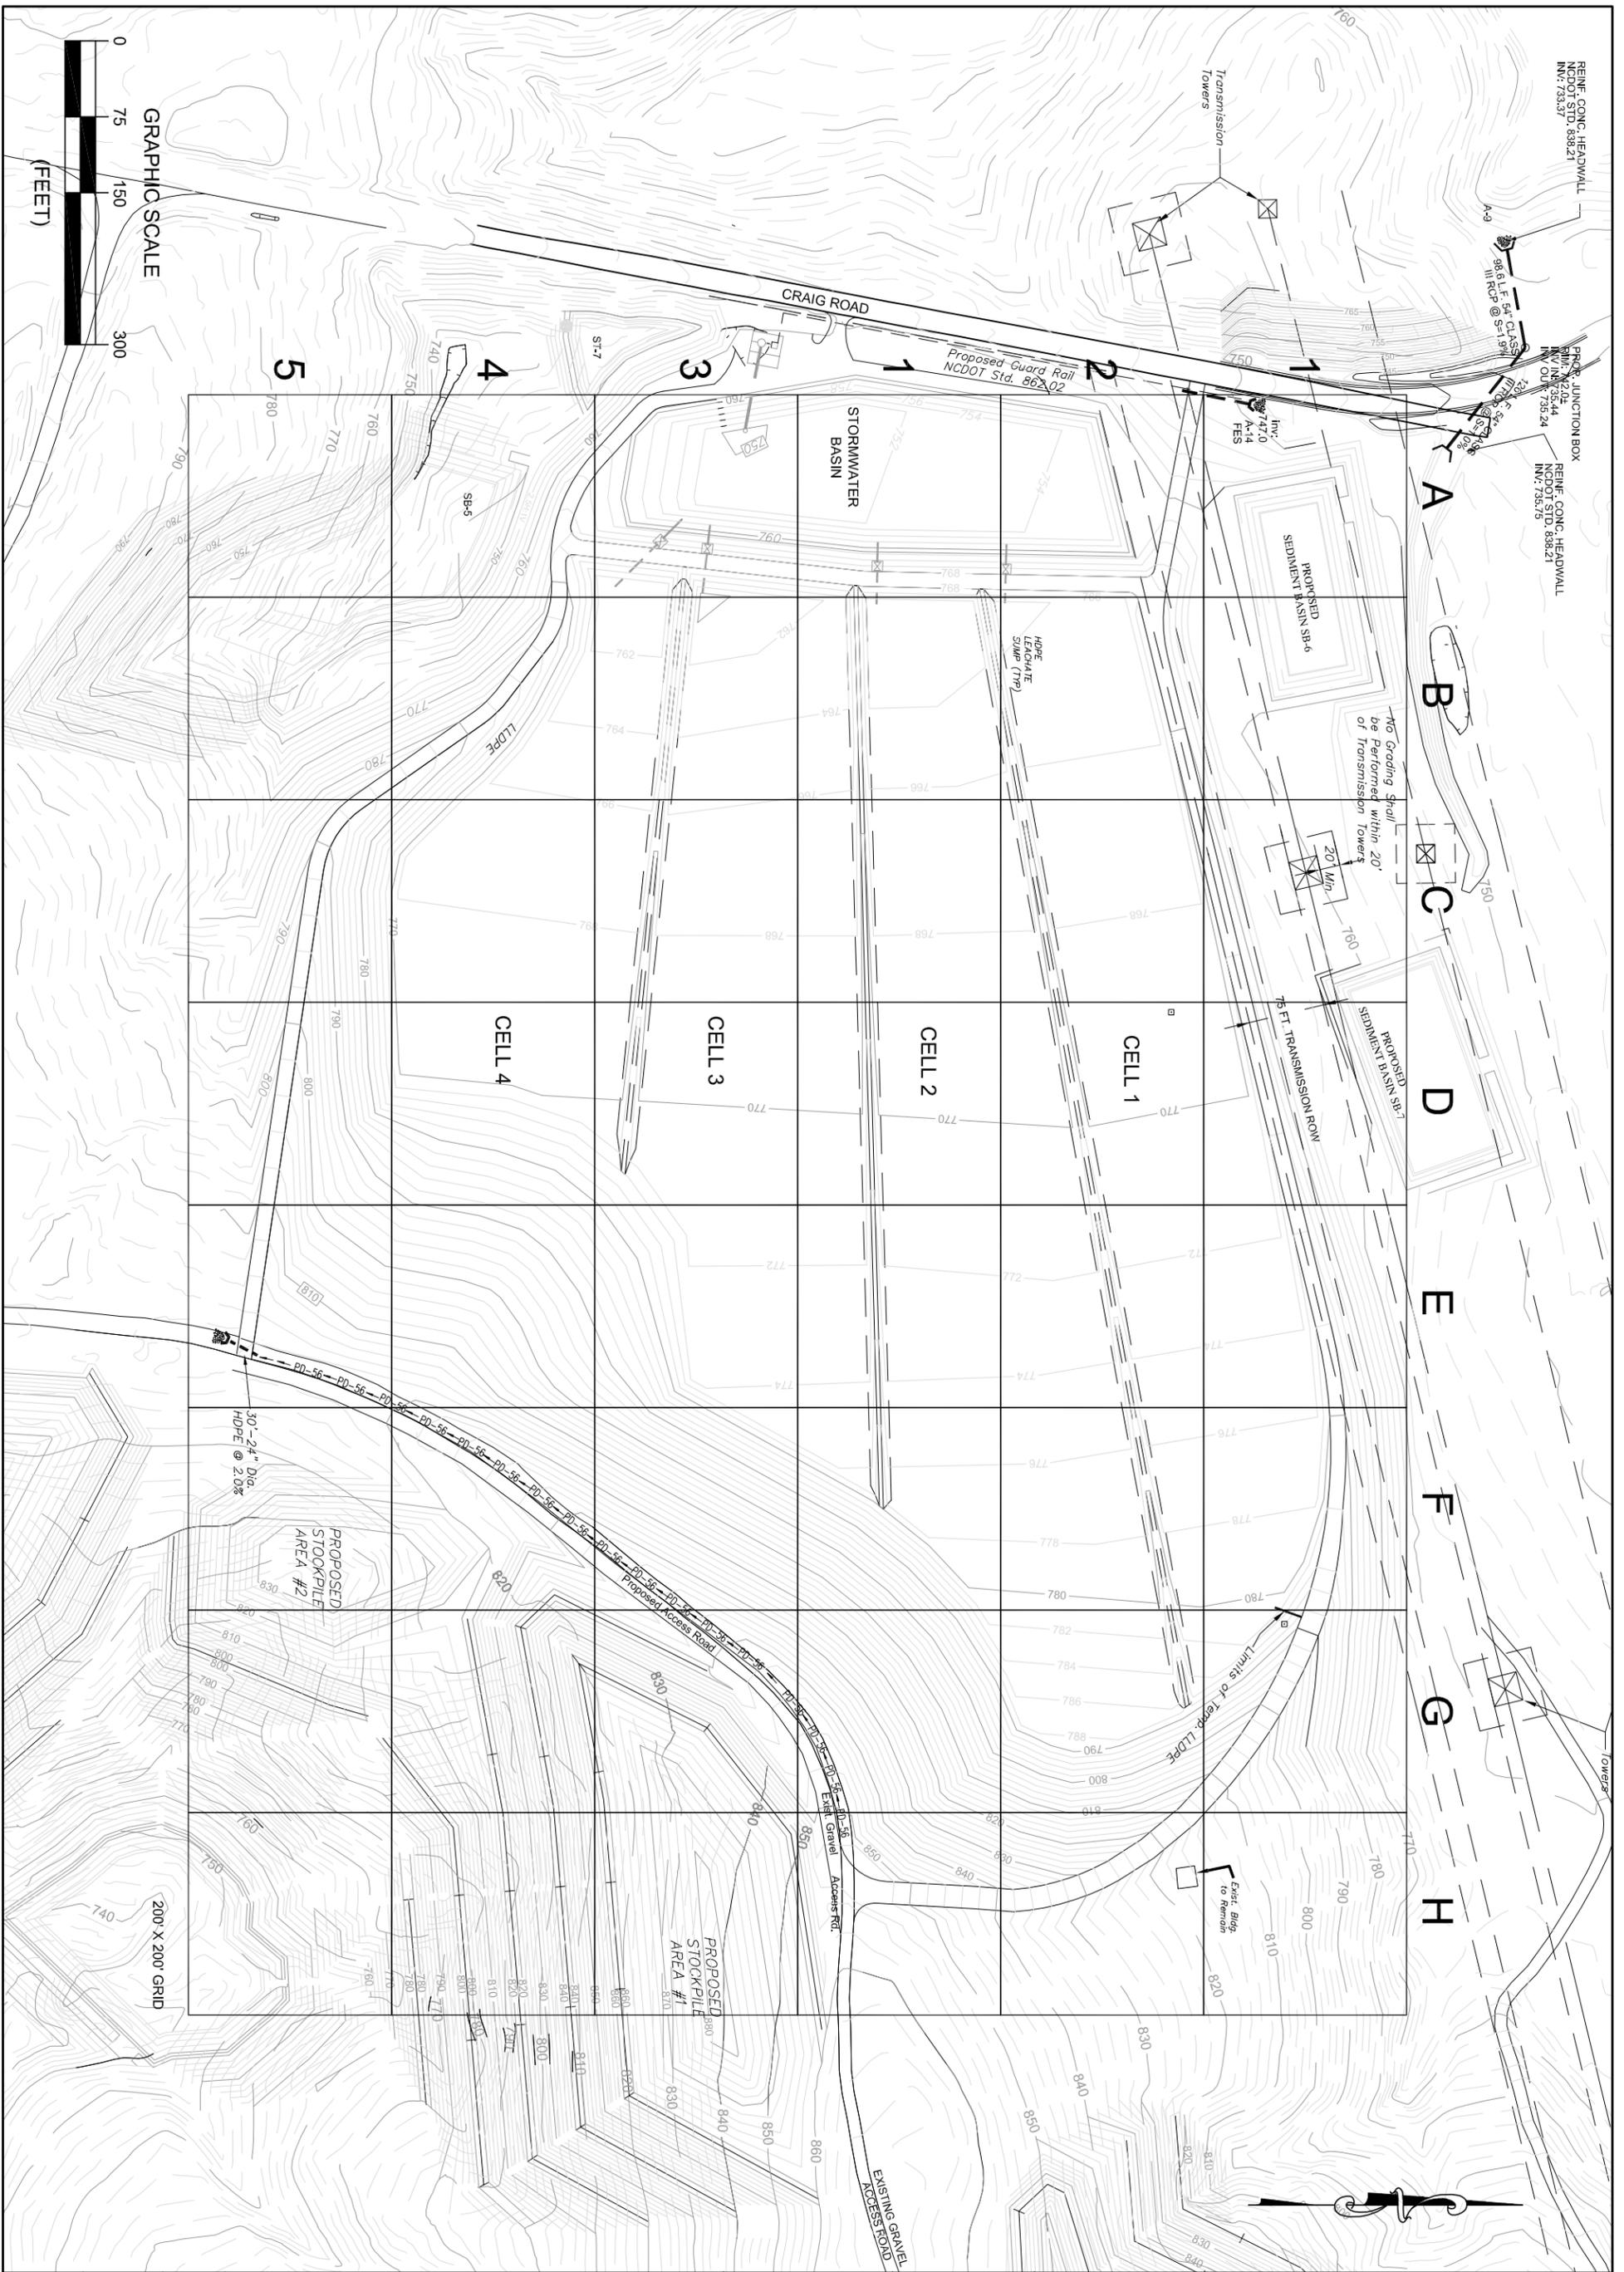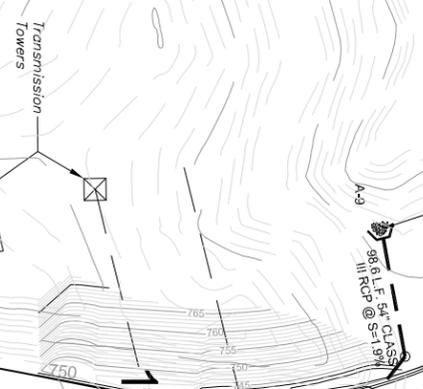

PROJECT NO. 845.1101.01	SCALE AS SHOWN	DRAWING NO. GRID EXHIBIT	DUKE ENERGY BCSS FGD LANDFILL BELWES CREEK, NORTH CAROLINA			DESIGNED: HRW	DATE: 6/20/11
			DUST CONTROL PLAN OPERATIONS GRID			DRAWN: HRW CHECKED: EEA APPROVED: EEA	
			2211 W. MEADOWVIEW ROAD GREENSBORO, NC 27407 PHONE: (336) 323-0092 NC CORP LIC: C-0782		© 2011 Joyce Engineering, Inc. All rights reserved.		
DATE	REVISIONS AND RECORD OF ISSUE		NO	BY	CK	APP	

Appendix II


Phasing Drawings

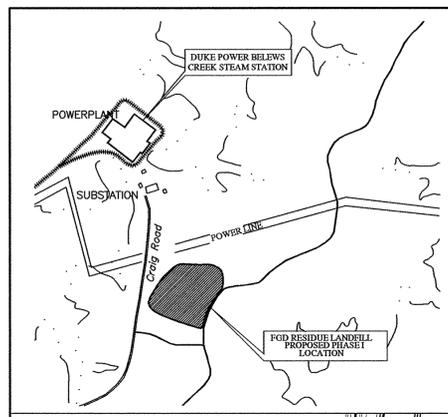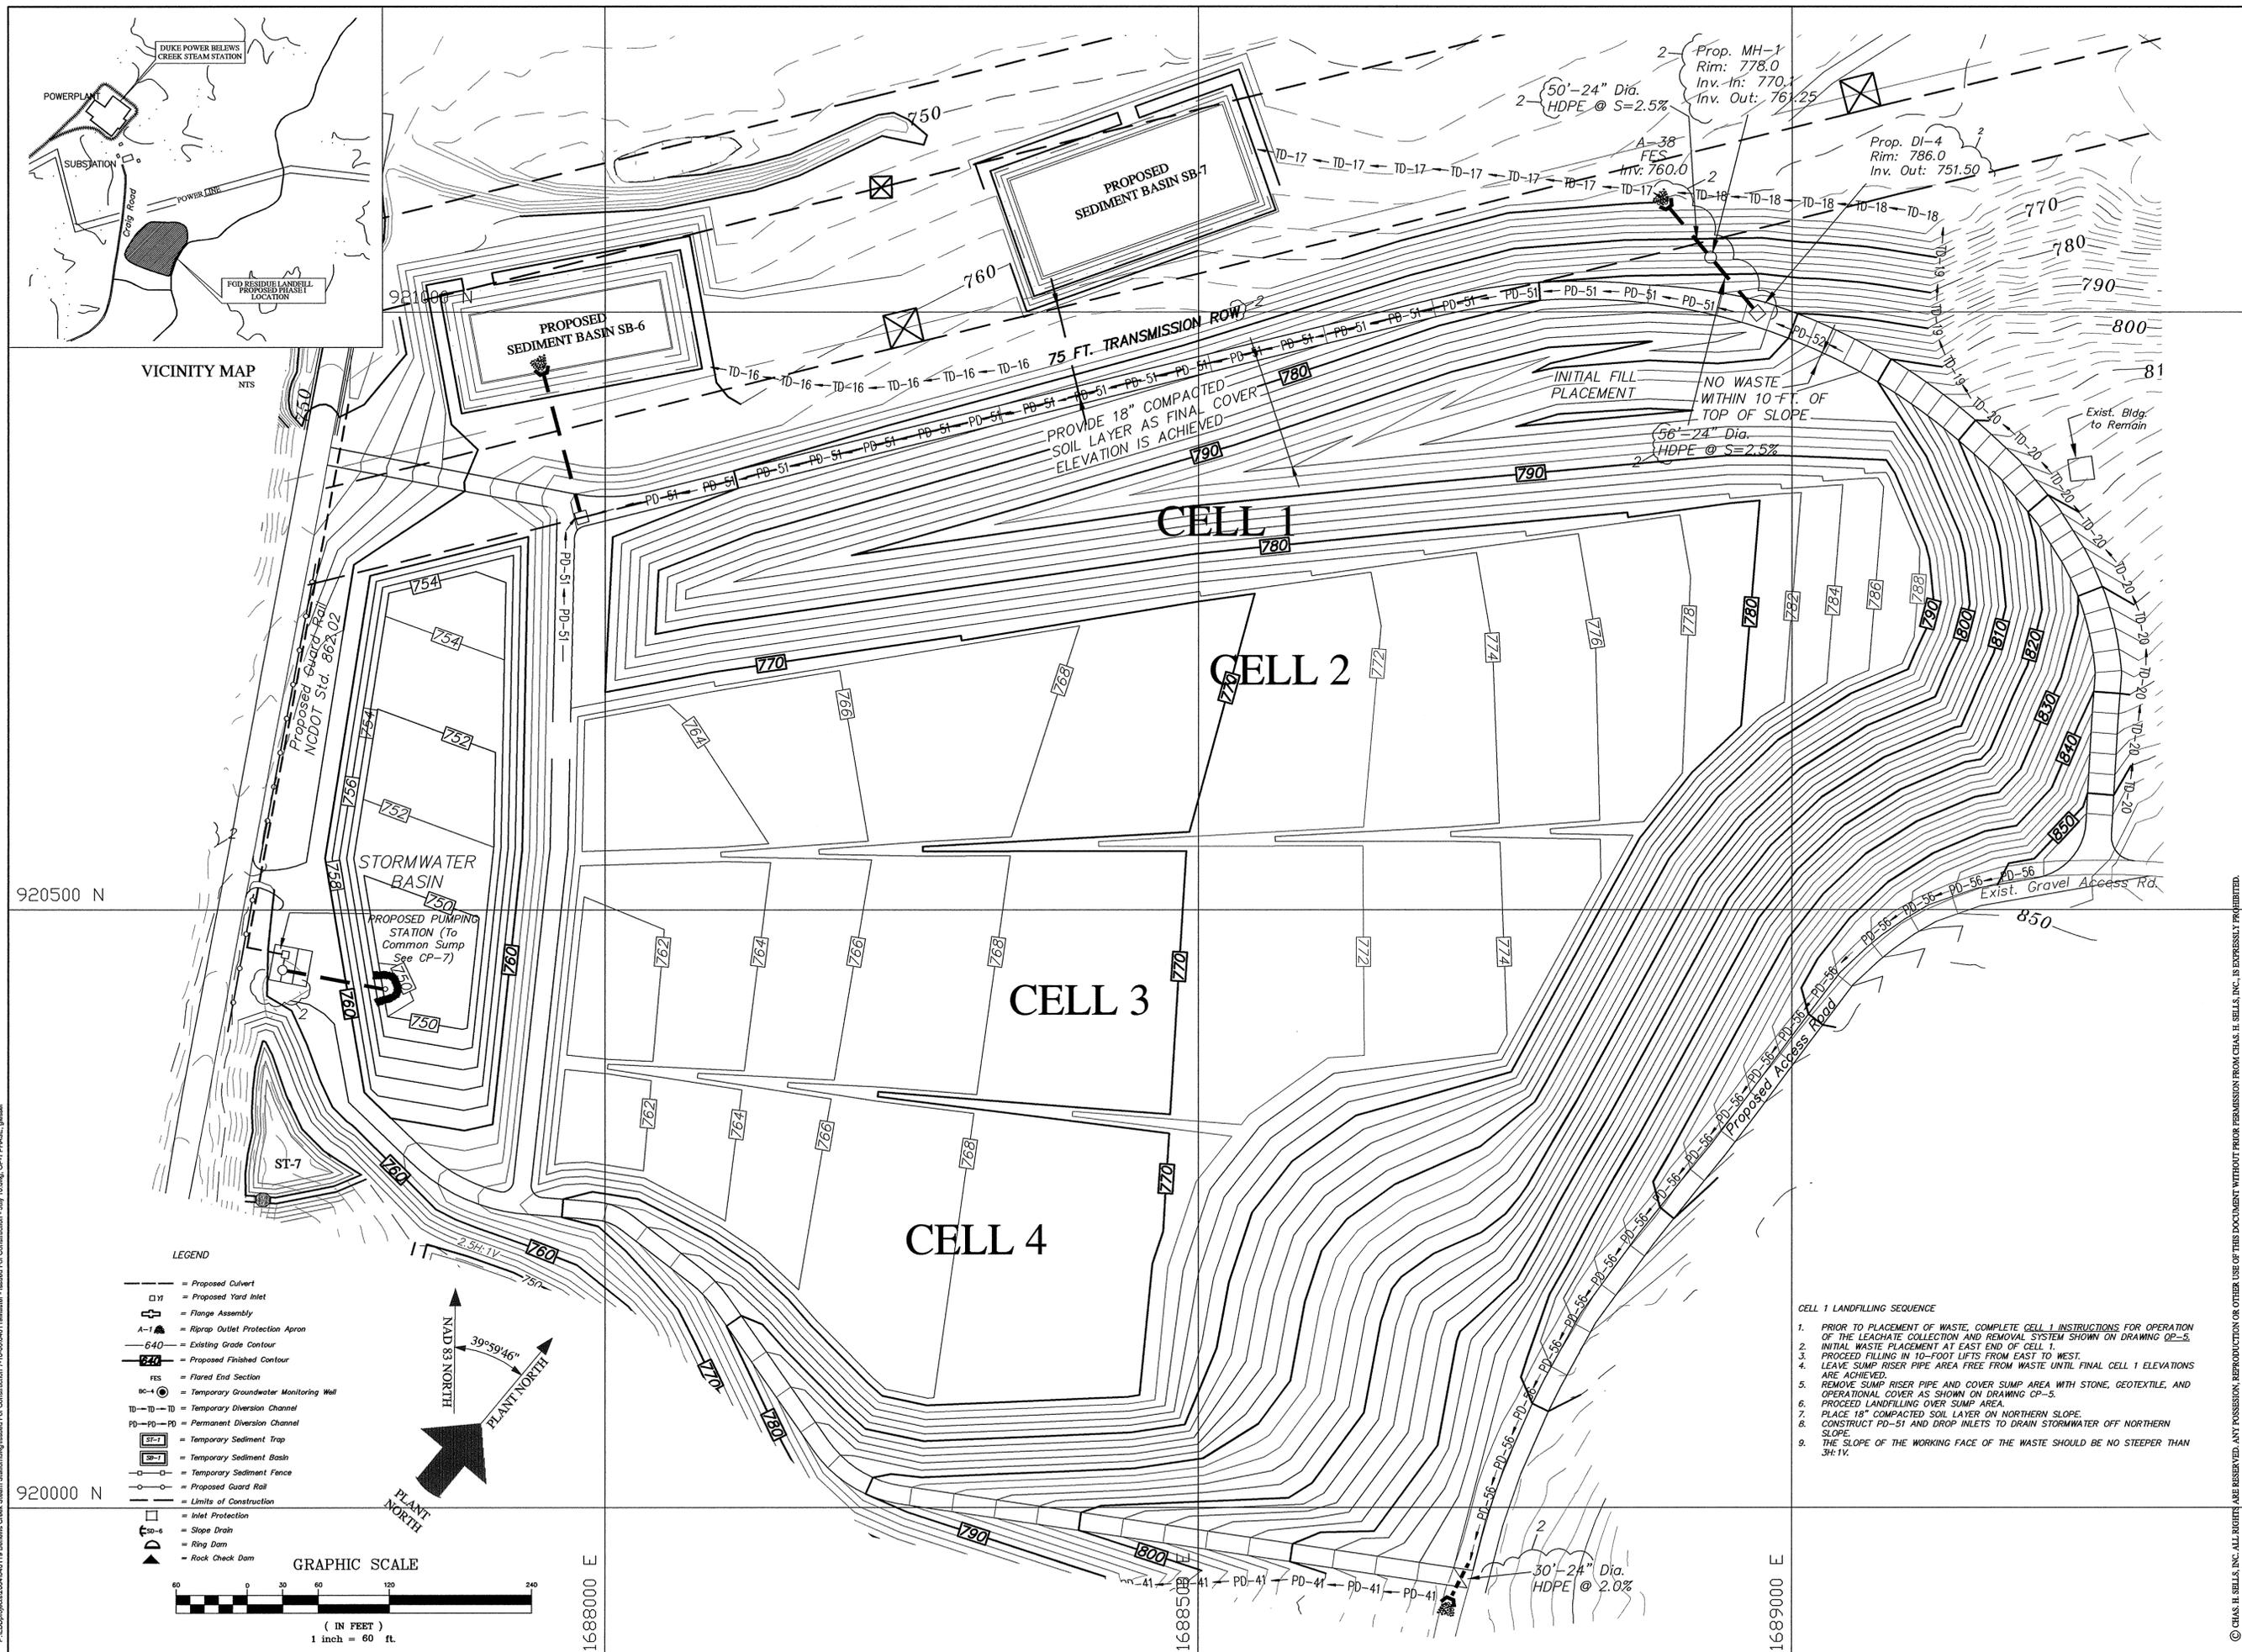

VICINITY MAP
NTS

920500 N

920000 N

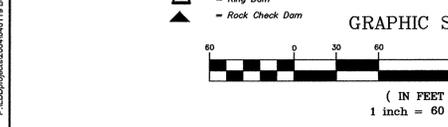


LEGEND

- = Proposed Culvert
- Y = Proposed Yard Inlet
- = Flange Assembly
- A-1 = Riprap Outlet Protection Apron
- 640 = Existing Grade Contour
- 744 = Proposed Finished Contour
- FES = Flared End Section
- BC-4 = Temporary Groundwater Monitoring Well
- TD-TD = Temporary Diversion Channel
- PD-PD = Permanent Diversion Channel
- ST-1 = Temporary Sediment Trap
- SB-1 = Temporary Sediment Basin
- = Temporary Sediment Fence
- = Proposed Guard Rail
- = Limits of Construction
- = Inlet Protection
- D-6 = Slope Drain
- = Ring Dam
- ▲ = Rock Check Dam



- CELL 1 LANDFILLING SEQUENCE
1. PRIOR TO PLACEMENT OF WASTE, COMPLETE CELL 1 INSTRUCTIONS FOR OPERATION OF THE LEACHATE COLLECTION AND REMOVAL SYSTEM SHOWN ON DRAWING Q2-5.
 2. INITIAL WASTE PLACEMENT AT EAST END OF CELL 1.
 3. PROCEED FILLING IN 10-FOOT LIFTS FROM EAST TO WEST.
 4. LEAVE SUMP RISER PIPE AREA FREE FROM WASTE UNTIL FINAL CELL 1 ELEVATIONS ARE ACHIEVED.
 5. REMOVE SUMP RISER PIPE AND COVER SUMP AREA WITH STONE, GEOTEXTILE, AND OPERATIONAL COVER AS SHOWN ON DRAWING CP-5.
 6. PROCEED LANDFILLING OVER SUMP AREA.
 7. PLACE 18" COMPACTED SOIL LAYER ON NORTHERN SLOPE.
 8. CONSTRUCT PD-51 AND DROP INLETS TO DRAIN STORMWATER OFF NORTHERN SLOPE.
 9. THE SLOPE OF THE WORKING FACE OF THE WASTE SHOULD BE NO STEEPER THAN 3:1V.



CHAS. H. SELLS, INC.
 Consulting Engineers, Surveyors & Photogrammetrists
 128 Overhill Drive
 Suite 105
 Mooresville, NC 28117
 Tel: 704-662-0100
 Fax: 704-662-0101
 www.chasells.com





**BELEWS CREEK STEAM STATION
 FGD RESIDUE LANDFILL**
 STOKES COUNTY, NORTH CAROLINA

REVISIONS		
NO.	DATE	DESCRIPTION
2	8/2/06	Duke Comments
1	4/18/06	Issued for Revised CPA
0	9/30/05	Issued for CPA
PROJECT #: 046119 DATE: 9/30/05		
DRAWN BY: DB CHECKED BY: DB		
TITLE		
PHASING DIAGRAM		
SHEET OP-1		

© CHAS. H. SELLS, INC. ALL RIGHTS ARE RESERVED. ANY REPRODUCTION OR OTHER USE OF THIS DOCUMENT WITHOUT PRIOR PERMISSION FROM CHAS. H. SELLS, INC. IS EXPRESSLY PROHIBITED.

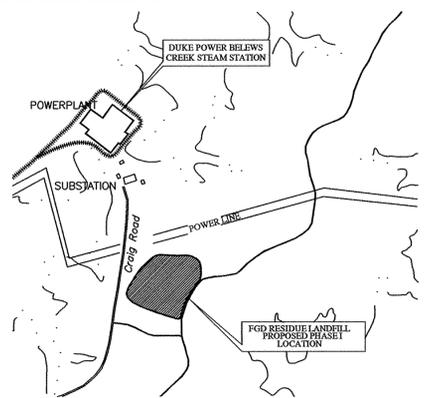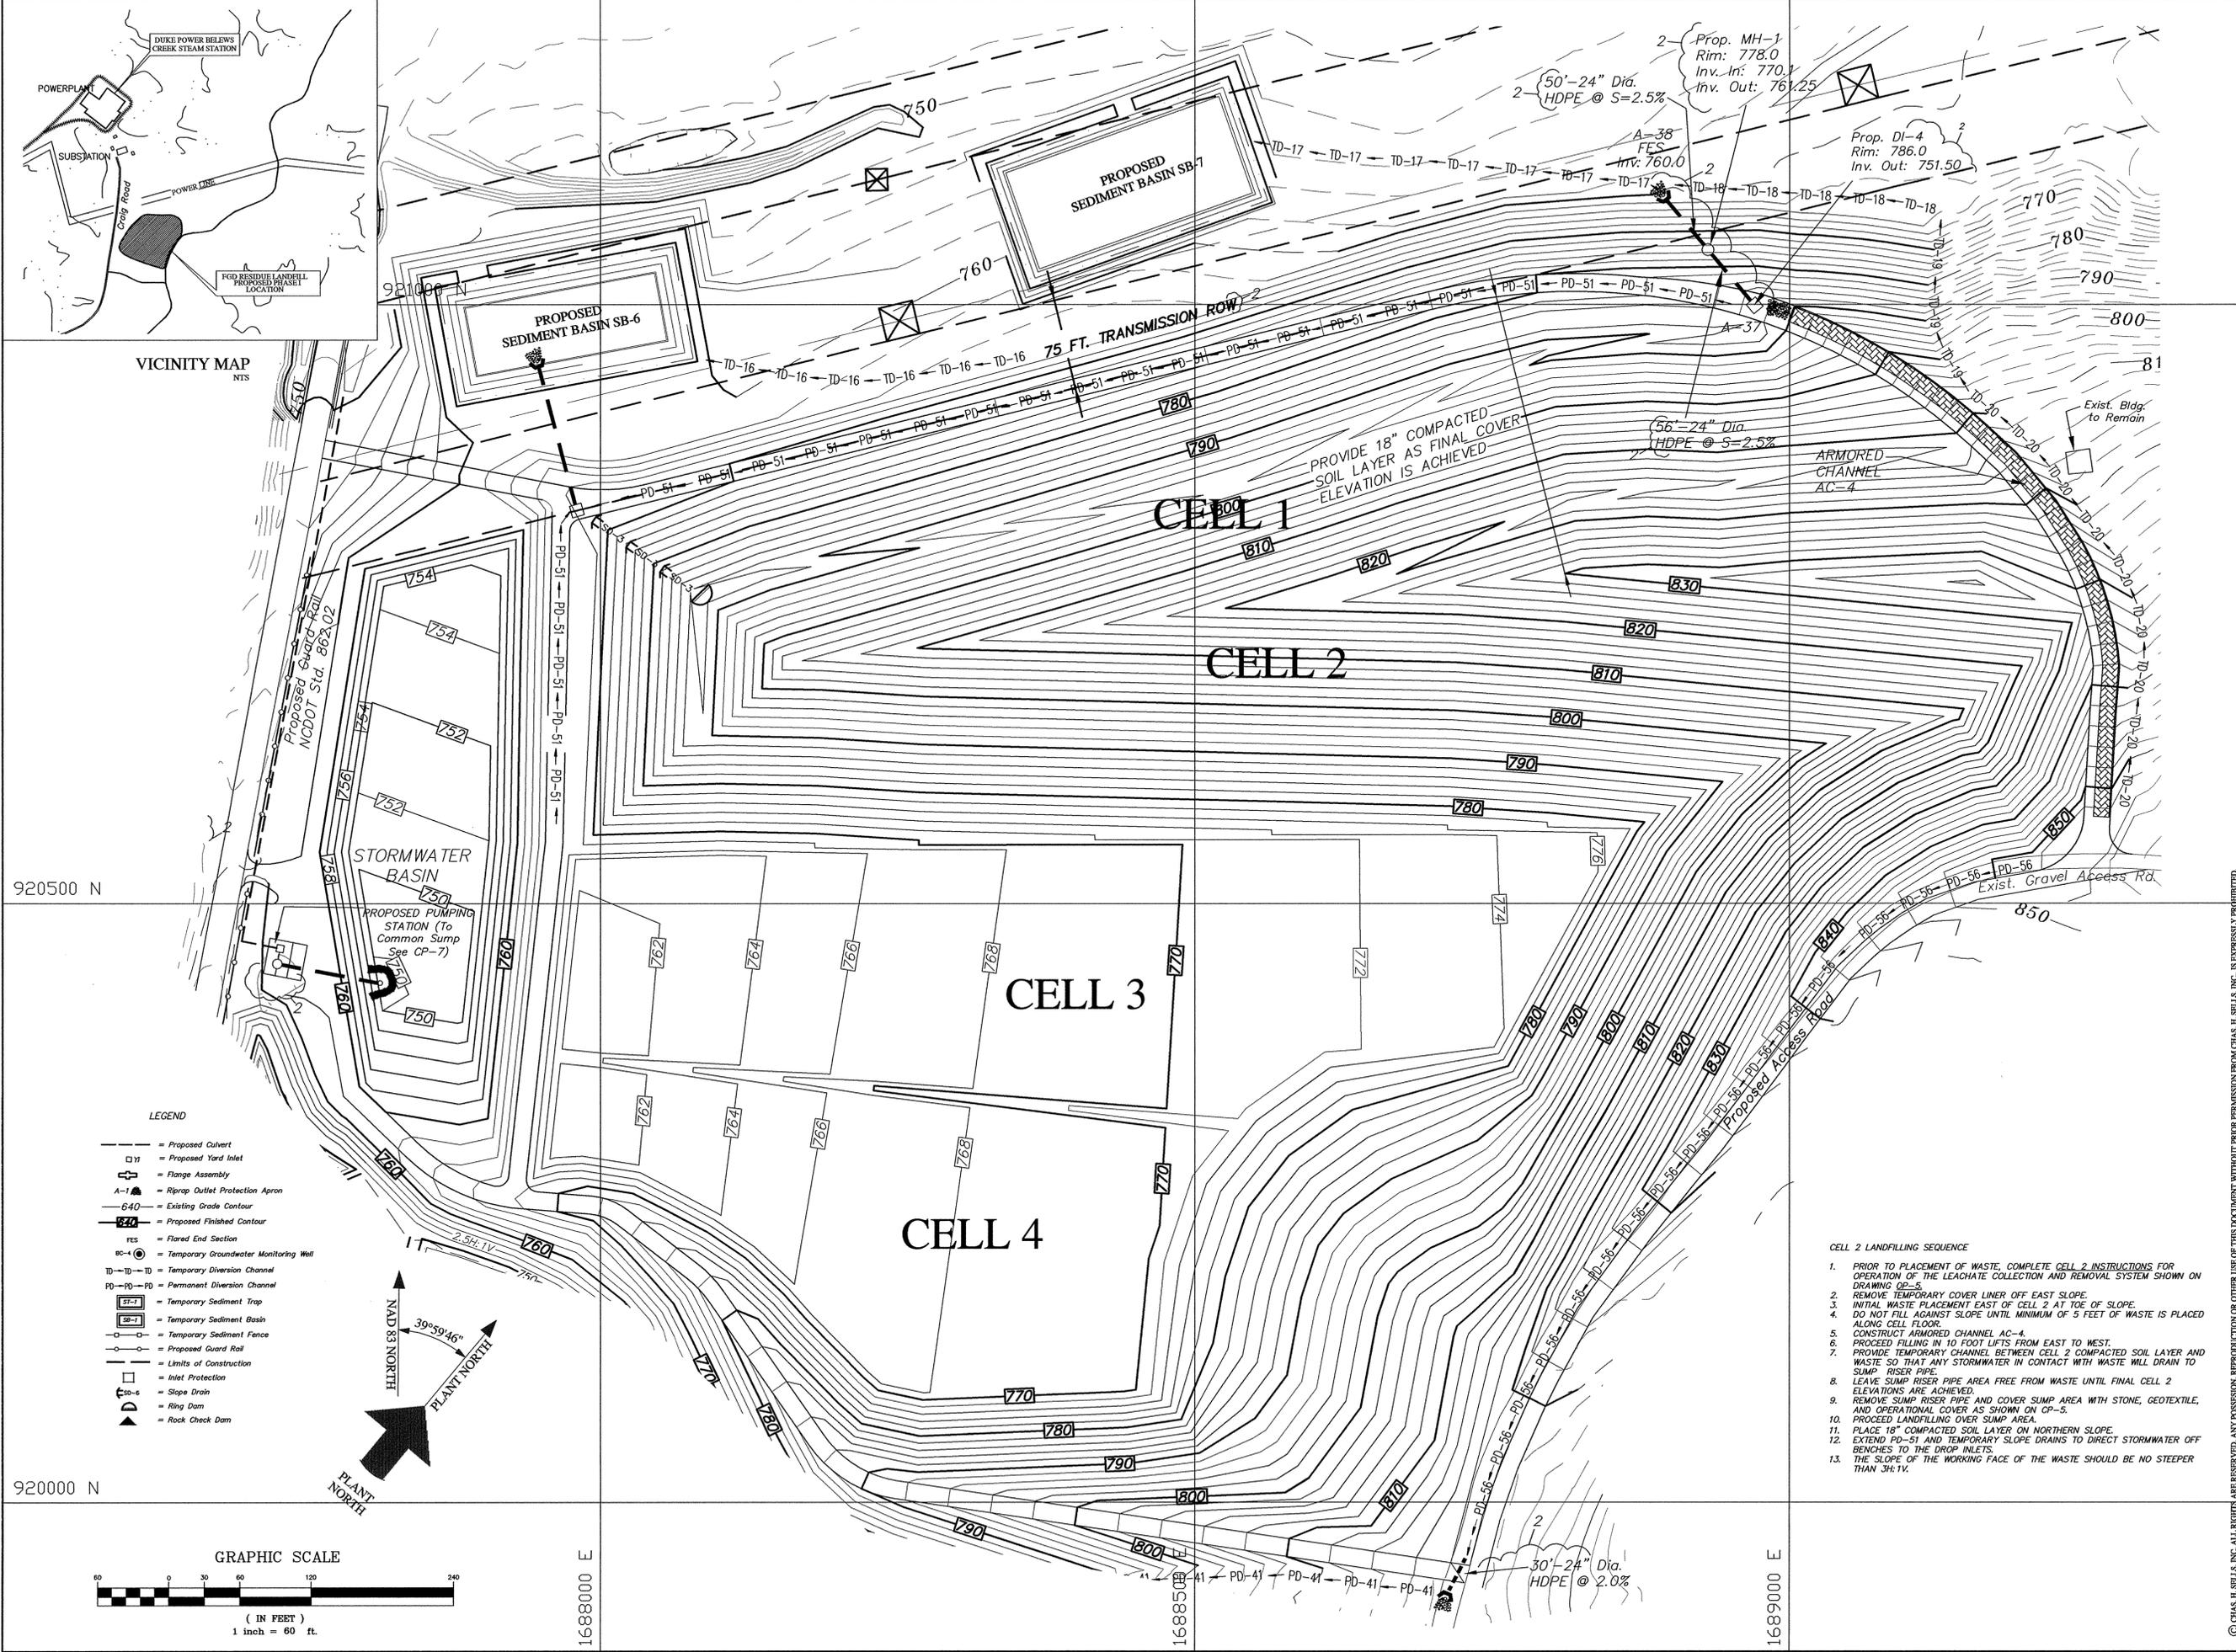

- LEGEND**
- = Proposed Culvert
 - = Proposed Yard Inlet
 - ⊕ = Flange Assembly
 - A-1 = Riprap Outlet Protection Apron
 - 640 = Existing Grade Contour
 - 820 = Proposed Finished Contour
 - FES = Flared End Section
 - ⊙ = Temporary Groundwater Monitoring Well
 - TD-10-10 = Temporary Diversion Channel
 - PD-51-PD = Permanent Diversion Channel
 - SB-7 = Temporary Sediment Trap
 - SB-6 = Temporary Sediment Basin
 - = Temporary Sediment Fence
 - = Proposed Guard Rail
 - = Limits of Construction
 - ⊕ = Inlet Protection
 - ⊕ = Ring Dam
 - ▲ = Rock Check Dam

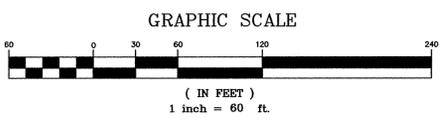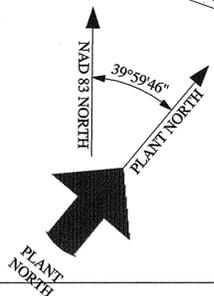

- CELL 2 LANDFILLING SEQUENCE**
1. PRIOR TO PLACEMENT OF WASTE, COMPLETE CELL 2 INSTRUCTIONS FOR OPERATION OF THE LEACHATE COLLECTION AND REMOVAL SYSTEM SHOWN ON DRAWING 02-5.
 2. REMOVE TEMPORARY COVER LINER OFF EAST SLOPE.
 3. INITIAL WASTE PLACEMENT EAST OF CELL 2 AT TOE OF SLOPE.
 4. DO NOT FILL AGAINST SLOPE UNTIL MINIMUM OF 5 FEET OF WASTE IS PLACED ALONG CELL FLOOR.
 5. CONSTRUCT ARMORED CHANNEL AC-4.
 6. PROCEED FILLING IN 10 FOOT LIFTS FROM EAST TO WEST.
 7. PROVIDE TEMPORARY CHANNEL BETWEEN CELL 2 COMPACTED SOIL LAYER AND WASTE SO THAT ANY STORMWATER IN CONTACT WITH WASTE WILL DRAIN TO SUMP RISER PIPE.
 8. LEAVE SUMP RISER PIPE AREA FREE FROM WASTE UNTIL FINAL CELL 2 ELEVATIONS ARE ACHIEVED.
 9. REMOVE SUMP RISER PIPE AND COVER SUMP AREA WITH STONE, GEOTEXTILE, AND OPERATIONAL COVER AS SHOWN ON CP-5.
 10. PROCEED LANDFILLING OVER SUMP AREA.
 11. PLACE 18" COMPACTED SOIL LAYER ON NORTHERN SLOPE.
 12. EXTEND PD-51 AND TEMPORARY SLOPE DRAINS TO DIRECT STORMWATER OFF BENCHES TO THE DROP INLETS.
 13. THE SLOPE OF THE WORKING FACE OF THE WASTE SHOULD BE NO STEEPER THAN 3H:1V.



CHAS. H. SELLS, INC.
 Consulting Engineers, Surveyors & Photogrammetrists
 128 Overhill Drive
 Suite 105
 Mooresville, NC 28117
 Tel: 704-662-0100
 Fax: 704-662-0101
 www.chashtsells.com

**BELEWS CREEK STEAM STATION
 FGD RESIDUE LANDFILL**
 STOKES COUNTY, NORTH CAROLINA

REVISIONS		
NO.	DATE	DESCRIPTION
2	8/2/06	Duke Comments
1	4/18/06	Issued for Revised CPA
0	9/30/05	Issued for CPA
PROJECT #: 046119 DATE: 9/30/05		
DRAWN BY: DB CHECKED BY: DB		
TITLE		
PHASING DIAGRAM		
SHEET		OP-2

P:\D\projects\2004\06119 Bellevue Creek Steam Station\Drawings\Phase 1 Construction\7-10-06\046119.dwg - Issued For Construction - July 10, 2006 - CP-2 PHASING - ghesse


© CHAS. H. SELLS, INC. ALL RIGHTS ARE RESERVED. ANY REPRODUCTION, REPRODUCTION OR OTHER USE OF THIS DOCUMENT WITHOUT PRIOR PERMISSION FROM CHAS. H. SELLS, INC. IS EXPRESSLY PROHIBITED.

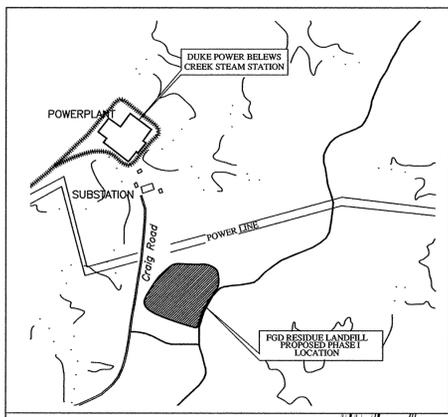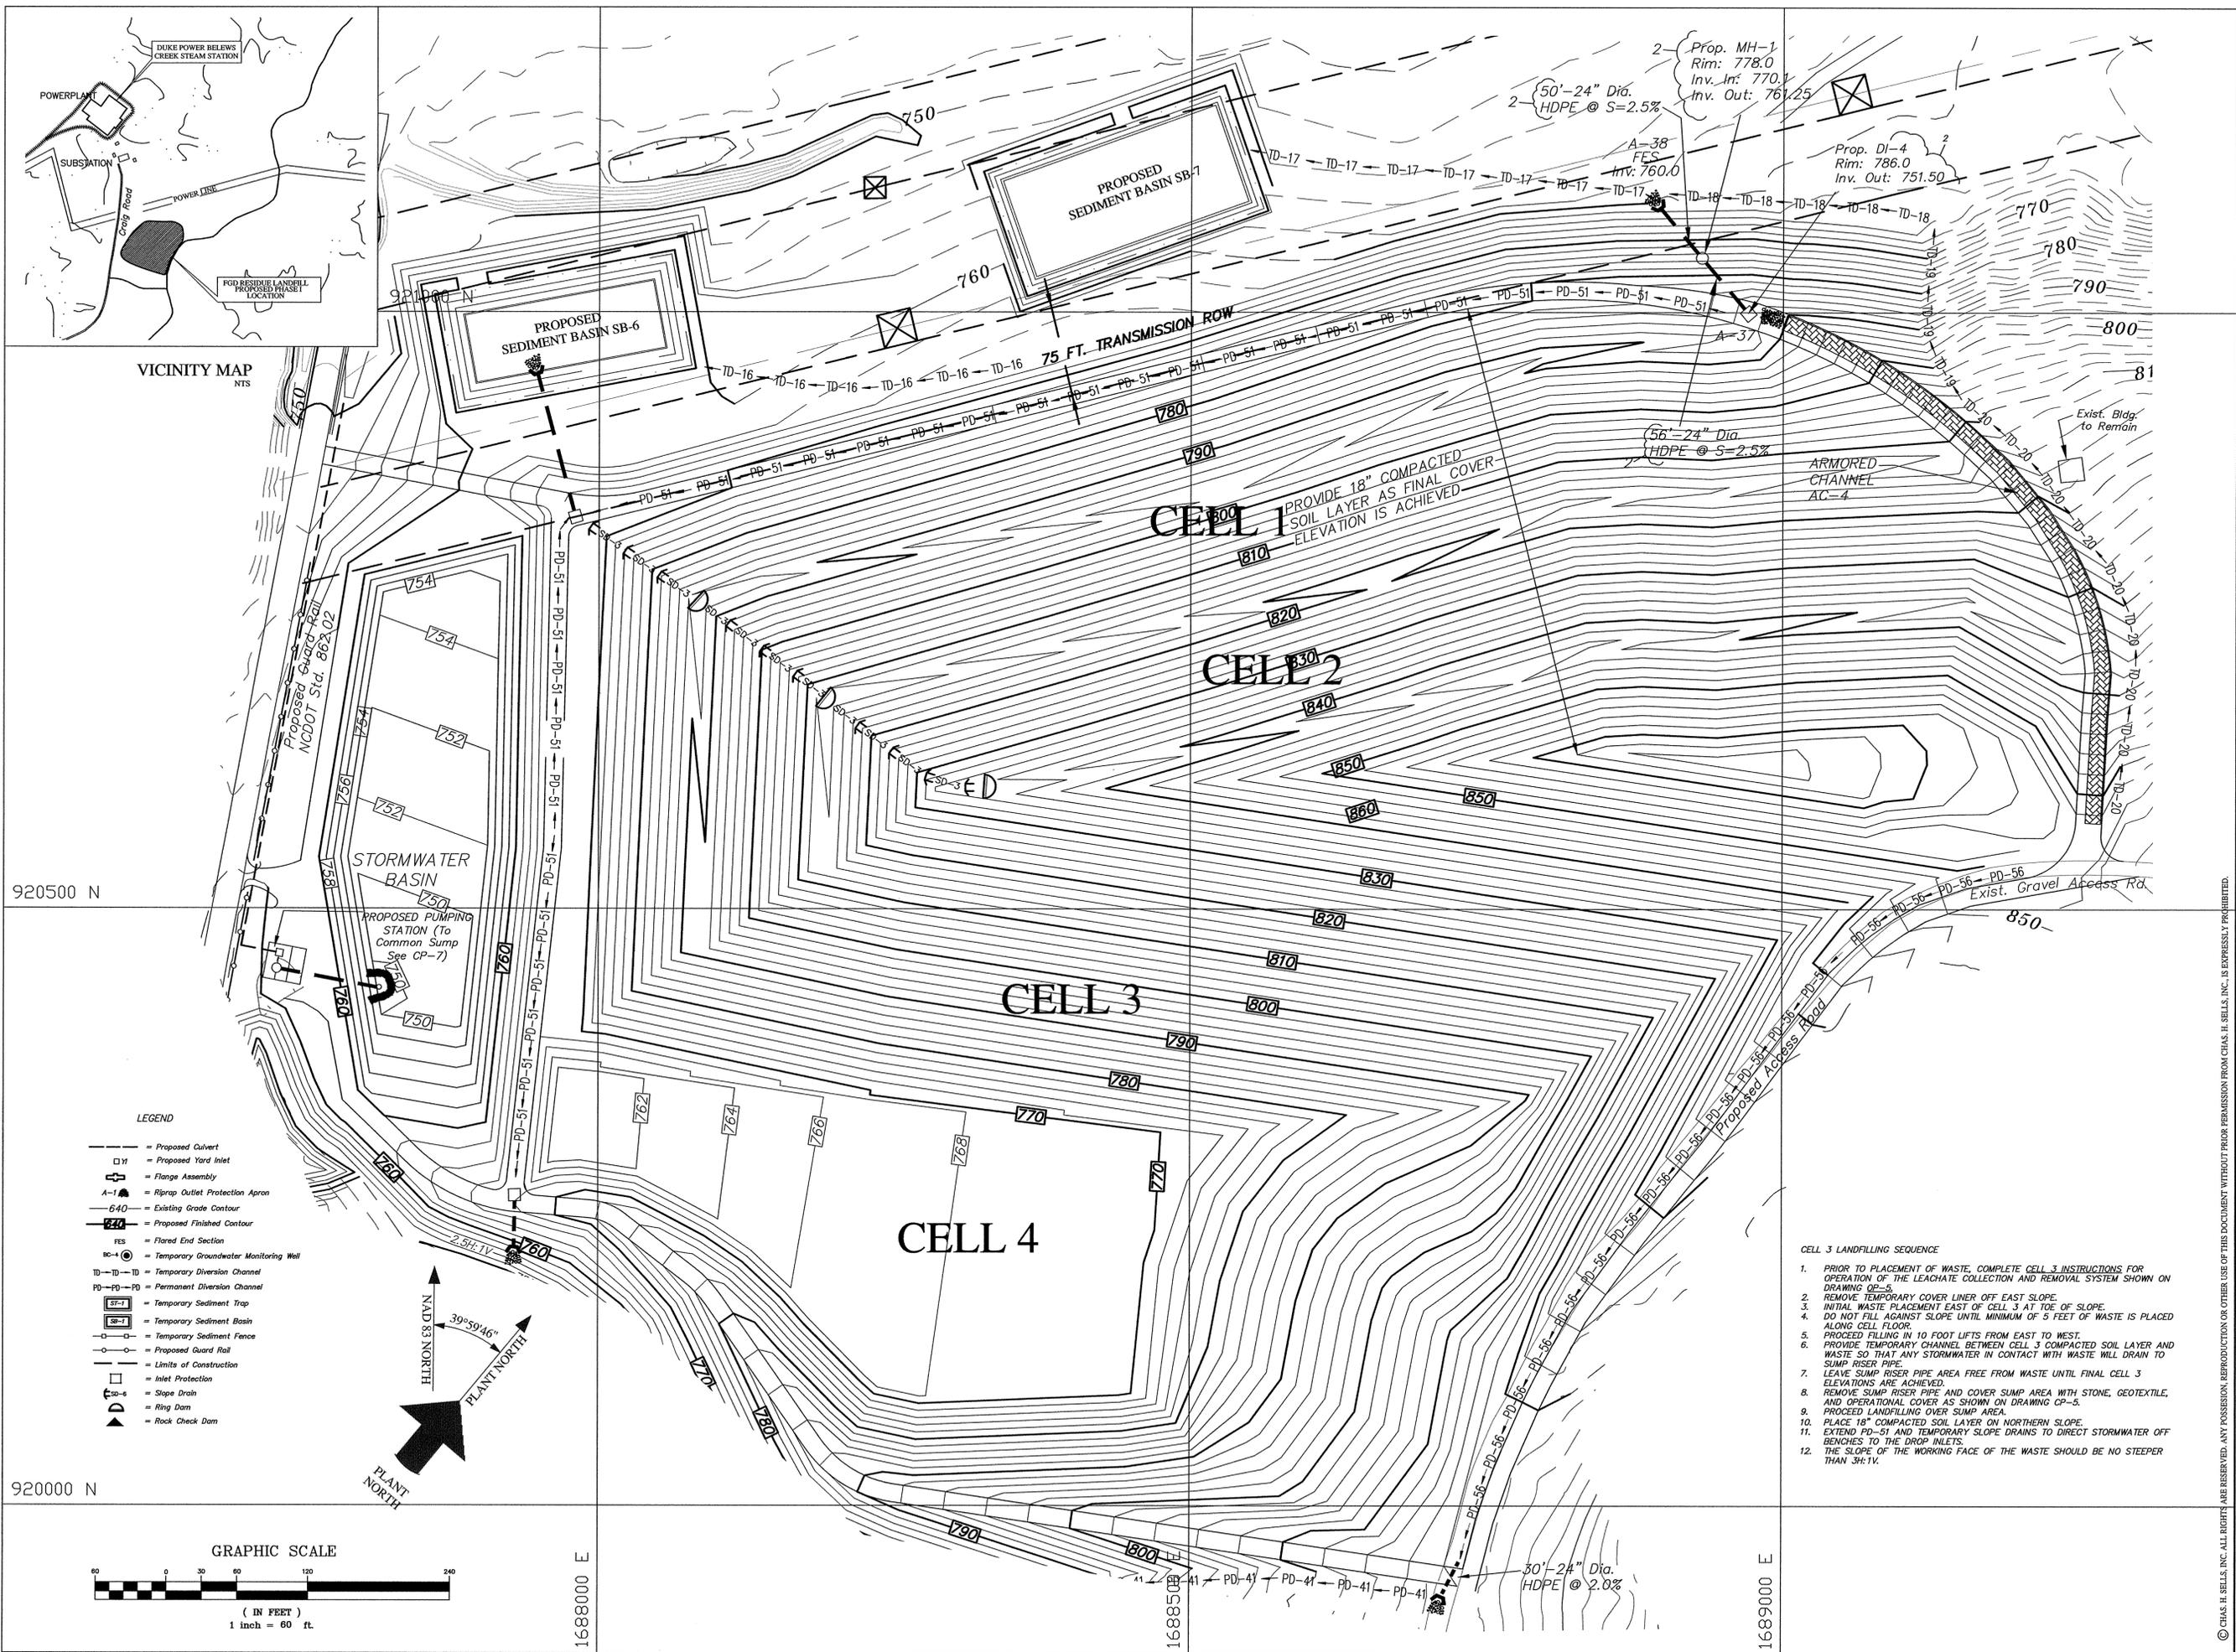


VICINITY MAP
NTS

920500 N

920000 N

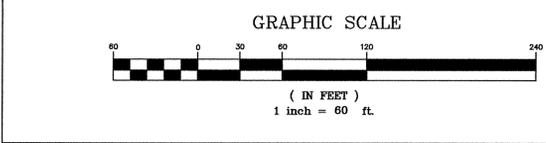

- LEGEND
- = Proposed Culvert
 - = Proposed Yard Inlet
 - ⊕ = Flange Assembly
 - A-1 = Riprap Outlet Protection Apron
 - = Existing Grade Contour
 - = Proposed Finished Contour
 - FES = Flared End Section
 - BC-4 = Temporary Groundwater Monitoring Well
 - TD-TD = Temporary Diversion Channel
 - PD-PD = Permanent Diversion Channel
 - ST-1 = Temporary Sediment Trap
 - SB-7 = Temporary Sediment Basin
 - = Temporary Sediment Fence
 - = Proposed Guard Rail
 - = Limits of Construction
 - ⊕ = Inlet Protection
 - ⊕ = Slope Drain
 - ⊕ = Ring Dam
 - ⊕ = Rock Check Dam

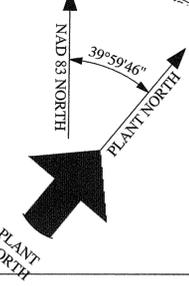


1688000 E

1689500 E

1689000 E

CHAS. H. SELLS, INC.
 Consulting Engineers, Surveyors & Photogrammetrists
 128 Overhill Drive
 Suite 105
 Mooresville, NC 28117
 Tel: 704-662-0100
 Fax: 704-662-0101
 www.chasells.com

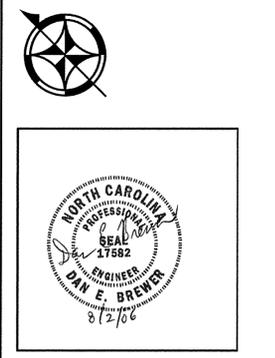

**BELEWS CREEK STEAM STATION
 FGD RESIDUE LANDFILL**
 STOKES COUNTY, NORTH CAROLINA



CELL 3 LANDFILLING SEQUENCE

1. PRIOR TO PLACEMENT OF WASTE, COMPLETE CELL 3 INSTRUCTIONS FOR OPERATION OF THE LEACHATE COLLECTION AND REMOVAL SYSTEM SHOWN ON DRAWING CP-5.
2. REMOVE TEMPORARY COVER LINER OFF EAST SLOPE.
3. INITIAL WASTE PLACEMENT EAST OF CELL 3 AT TOE OF SLOPE.
4. DO NOT FILL AGAINST SLOPE UNTIL MINIMUM OF 5 FEET OF WASTE IS PLACED ALONG CELL FLOOR.
5. PROCEED FILLING IN 10 FOOT LIFTS FROM EAST TO WEST.
6. PROVIDE TEMPORARY CHANNEL BETWEEN CELL 3 COMPACTED SOIL LAYER AND WASTE SO THAT ANY STORMWATER IN CONTACT WITH WASTE WILL DRAIN TO SUMP RISER PIPE.
7. LEAVE SUMP RISER PIPE AREA FREE FROM WASTE UNTIL FINAL CELL 3 ELEVATIONS ARE ACHIEVED.
8. REMOVE SUMP RISER PIPE AND COVER SUMP AREA WITH STONE, GEOTEXTILE, AND OPERATIONAL COVER AS SHOWN ON DRAWING CP-5.
9. PROCEED LANDFILLING OVER SUMP AREA.
10. PLACE 18" COMPACTED SOIL LAYER ON NORTHERN SLOPE.
11. EXTEND PD-51 AND TEMPORARY SLOPE DRAINS TO DIRECT STORMWATER OFF BENCHES TO THE DROP INLETS.
12. THE SLOPE OF THE WORKING FACE OF THE WASTE SHOULD BE NO STEEPER THAN 3H:1V.

REVISIONS	
NO.	DATE
2	8/2/06 Duke Comments
1	4/18/06 Issued for Revised CPA
0	9/30/05 Issued for CPA



PROJECT #: 046119 DATE: 9/30/05
 DRAWN BY: DB CHECKED BY: DB
 TITLE
**PHASING
 DIAGRAM**
 SHEET **OP-3**

© CHAS. H. SELLS, INC. ALL RIGHTS ARE RESERVED. ANY REPRODUCTION OR OTHER USE OF THIS DOCUMENT WITHOUT PRIOR PERMISSION FROM CHAS. H. SELLS, INC. IS EXPRESSLY PROHIBITED.

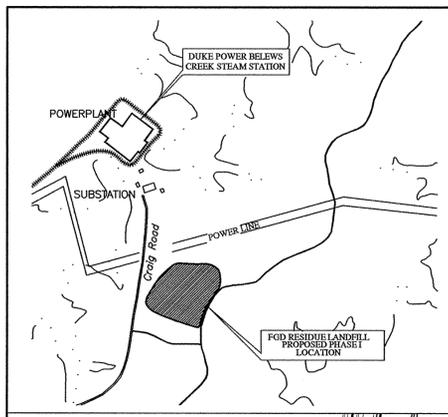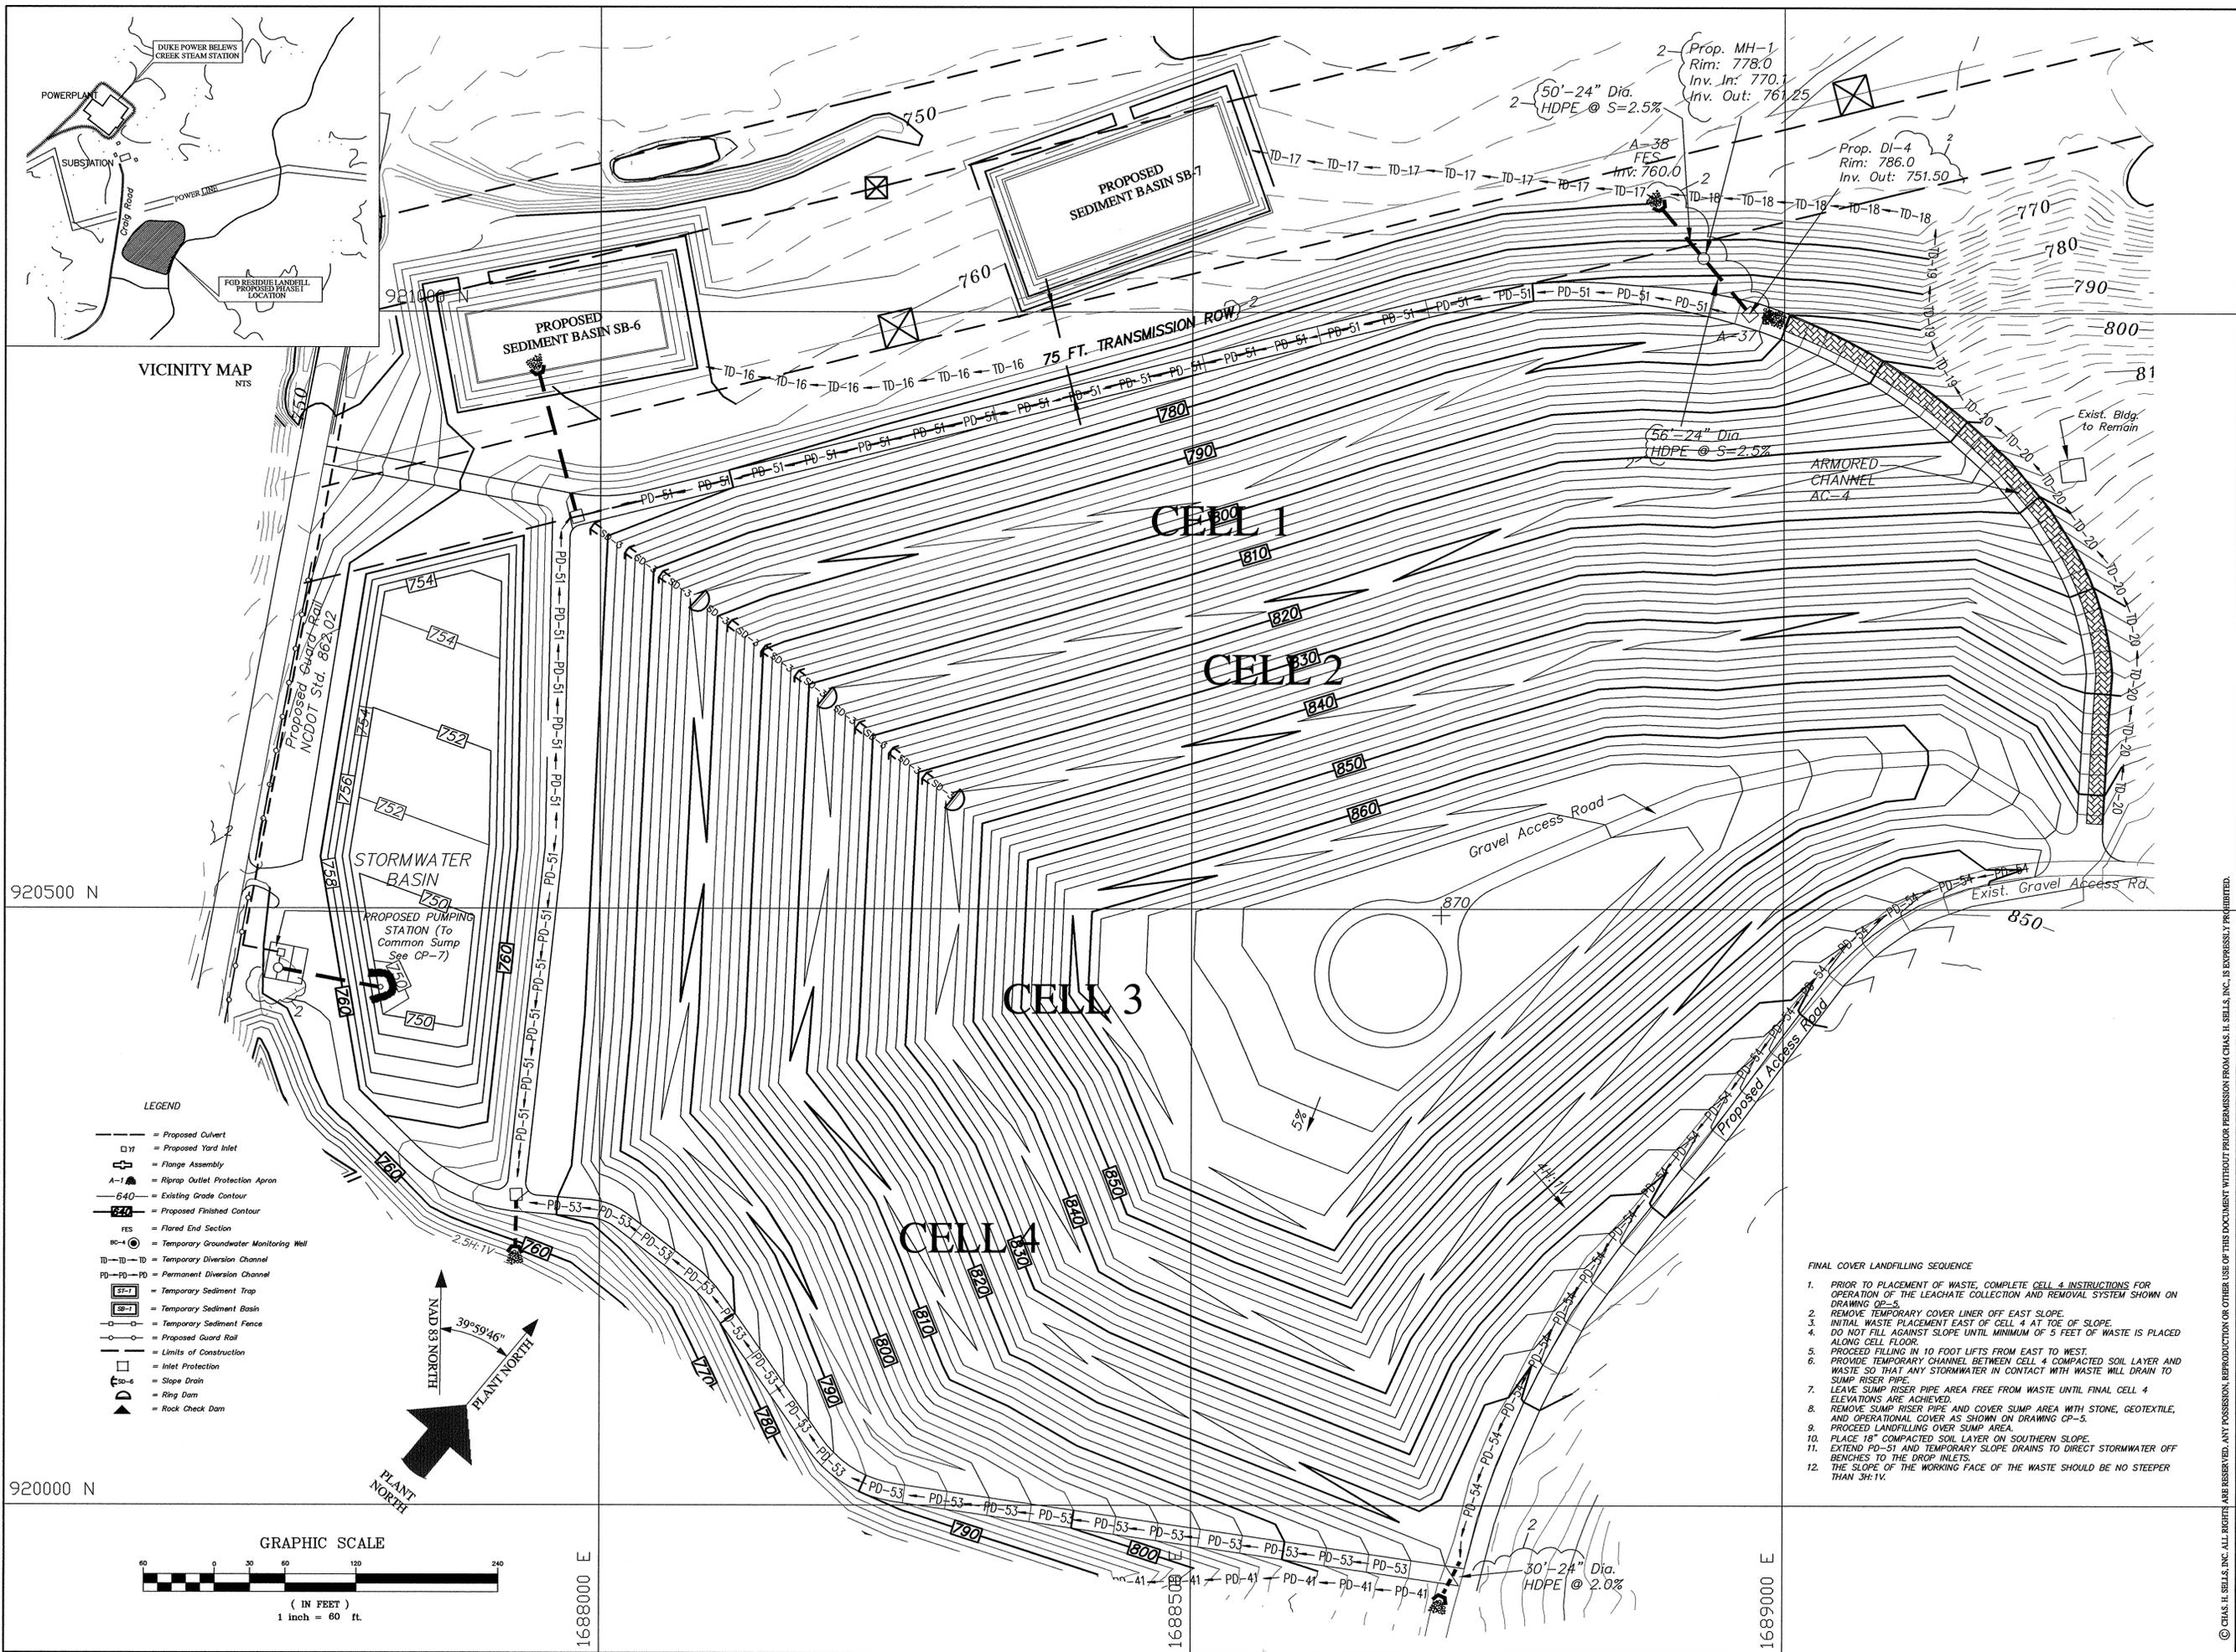


VICINITY MAP
NTS

- LEGEND**
- = Proposed Culvert
 - = Proposed Yard Inlet
 - ⊕ = Flange Assembly
 - A— = Riprap Outlet Protection Apron
 - 64— = Existing Grade Contour
 - 84— = Proposed Finished Contour
 - FES = Flared End Section
 - ⊙ = Temporary Groundwater Monitoring Well
 - TD—TD = Temporary Diversion Channel
 - PD—PD = Permanent Diversion Channel
 - ST-1 = Temporary Sediment Trap
 - SB-1 = Temporary Sediment Basin
 - = Temporary Sediment Fence
 - = Proposed Guard Rail
 - = Limits of Construction
 - = Inlet Protection
 - D— = Slope Drain
 - = Ring Dam
 - = Rock Check Dam

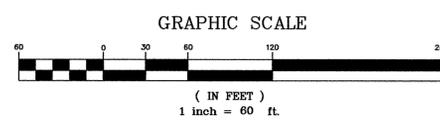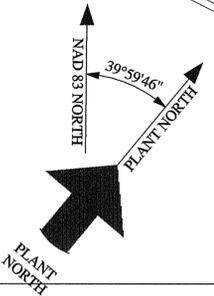

- FINAL COVER LANDFILLING SEQUENCE**
1. PRIOR TO PLACEMENT OF WASTE, COMPLETE CELL 4 INSTRUCTIONS FOR OPERATION OF THE LEACHATE COLLECTION AND REMOVAL SYSTEM SHOWN ON DRAWING CP-5.
 2. REMOVE TEMPORARY COVER LINER OFF EAST SLOPE.
 3. INITIAL WASTE PLACEMENT EAST OF CELL 4 AT TOE OF SLOPE.
 4. DO NOT FILL AGAINST SLOPE UNTIL MINIMUM OF 5 FEET OF WASTE IS PLACED ALONG CELL FLOOR.
 5. PROCEED FILLING IN 10 FOOT LIFTS FROM EAST TO WEST.
 6. PROVIDE TEMPORARY CHANNEL BETWEEN CELL 4 COMPACTED SOIL LAYER AND WASTE SO THAT ANY STORMWATER IN CONTACT WITH WASTE WILL DRAIN TO SUMP RISER PIPE.
 7. LEAVE SUMP RISER PIPE AREA FREE FROM WASTE UNTIL FINAL CELL 4 ELEVATIONS ARE ACHIEVED.
 8. REMOVE SUMP RISER PIPE AND COVER SUMP AREA WITH STONE, GEOTEXTILE, AND OPERATIONAL COVER AS SHOWN ON DRAWING CP-5.
 9. PROCEED LANDFILLING OVER SUMP AREA.
 10. PLACE 18" COMPACTED SOIL LAYER ON SOUTHERN SLOPE.
 11. EXTEND PD-51 AND TEMPORARY SLOPE DRAINS TO DIRECT STORMWATER OFF BENCHES TO THE DROP INLETS.
 12. THE SLOPE OF THE WORKING FACE OF THE WASTE SHOULD BE NO STEEPER THAN 3H:1V.

CHAS. H. SELLS, INC.
 Consulting Engineers, Surveyors & Photogrammetrists
 128 Overhill Drive
 Suite 105
 Mooresville, NC 28117
 Tel: 704-662-0100
 Fax: 704-662-0101
 www.chashsells.com

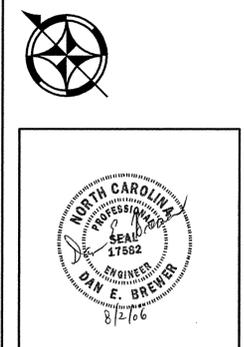

**BELEWS CREEK STEAM STATION
 FGD RESIDUE LANDFILL**
 STOKES COUNTY, NORTH CAROLINA

REVISIONS	
NO.	DESCRIPTION
2	8/2/06 Duke Comments
1	4/18/06 Issued for Revised CPA
0	9/30/05 Issued for CPA
PROJECT #: 046119 DATE: 9/30/05	
DRAWN BY: DB CHECKED BY: DB	
TITLE	
PHASING DIAGRAM	
SHEET OP-4	

© CHAS. H. SELLS, INC. ALL RIGHTS ARE RESERVED. ANY REPRODUCTION, REPRODUCTION OR OTHER USE OF THIS DOCUMENT WITHOUT PRIOR PERMISSION FROM CHAS. H. SELLS, INC. IS EXPRESSLY PROHIBITED.

Appendix III

Closure/Post-Closure Plan

1. INTRODUCTION

1.1 Introduction

The following Closure and Post-Closure Plan was prepared for Belews Creek Steam Station (BCSS) – Flue Gas Desulfurization (FGD) Residue Landfill. This plan was prepared in accordance with Title 15A Subchapter 13B of the North Carolina Administrative Code (NCAC). Specifically, this plan was prepared to meet the requirements of the .0503(2) and .0504(2) and 0.0505 and substantive requirements of Rules .1627-.1629 present requirements for closure and post- closure of Municipal Solid Waste (MSW) Landfills. As stated, these rules apply to MSW units. The proposed unit will be a FGD Residue and coal combustion products landfill, and therefore some of the requirements of Rules .1627-.1629 do not apply. The information contained in this plan will be used to assist Duke Energy Carolinas, LLC (Duke Energy) in the closure of active waste units and the maintenance and monitoring required during the post-closure care period.

1.2 Project Information

The BCSS FGD Landfill is owned and operated by Duke Energy Carolinas, LLC (Duke). The landfill is located in Stokes County, North Carolina on Duke property, south of the Belews Creek Steam Plant, between the east and west arms of Belews Creek Lake near Walnut Cove.

The purpose of the Closure/Post-Closure Plan is to outline the sequence for closing the landfill phase and the post-closure maintenance activities for each phase. Closure is designed to minimize the need for long term maintenance and to control the post-closure release of contaminants. Closure activities may be revised as appropriate for materials, specifications, technology advances or changes in regulations at that time.

2. CLOSURE PLAN

The cover system has been designed to reduce infiltration into the landfill and to resist erosion. The proposed cover system will incorporate a number of components which are described in the following sections.

2.1 Cover System

The proposed final cover system will consist of the following from top to bottom and will be placed over interim cover soils:

- a 6-inch thick vegetated erosion layer;
- a 18-inch thick soil barrier;
- a geocomposite drainage layer;
- a 40-mil thick double-sided textured linear low density polyethylene (LLDPE) geomembrane;
- a geocomposite gas collection layer; and
- existing intermediate soil cover.

2.1.1 Erosion Layer

The erosion layer will reduce erosion of the cover system, protect the soil barrier from root penetration, and will consist of 6 inches of soil capable of sustaining native plant growth.

2.1.2 Soil Barrier

In concert with the underlying geocomposite drainage layer and geomembrane, the soil barrier will help minimize infiltration through to the waste and protect the liner.

2.1.3 Geocomposite Drainage Layer

The geocomposite drainage layer will promote cover system stability by collecting and routing water that infiltrates the soil barrier to the perimeter surface water conveyance measures.

2.1.4 Geomembrane

As an additional measure to prevent infiltration through the cover system and into the waste, a geomembrane will be placed directly over the geocomposite gas collection layer.

2.1.5 Geocomposite Gas Collection Layer

The geocomposite gas collection layer will be placed directly over the interim cover of the proposed landfill and will provide a pathway for accumulated gas to move laterally to the gas vents.

2.1.6 Intermediate Cover

A thick layer of soil will be placed on top of the waste once final grades are reached. This intermediate soil layer will serve as the base for the geocomposite gas collection layer.

2.2 Gas Venting System

Waste will consist of flue gas desulfurization (FGD) residue and coal combustion residuals including fly ash, bottom ash, and mill rejects generated at the Belews Creek Steam Station. The majority of the waste stream will consist of FGD gypsum and ash. Based on the inorganic nature of the waste, methane will not be generated; also, it is not anticipated that hydrogen sulfide gas will be generated or that odor will be an issue. Therefore, Duke Energy does not propose monitoring for landfill gas nor providing landfill gas management measures until the final cover is installed.

In the event that hydrogen sulfide gases are detected during landfill operations, appropriate actions will be taken. In the event that gases are regularly detected during active landfill operations, the final closure and post-closure plan will be developed to address the gas. A landfill passive gas venting system is provided as part of the engineered cover system. Once the landfill is capped, no monitoring for hydrogen sulfide gas will be necessary.

2.3 Stormwater Management Systems

The proposed landfill is designed with a network of various stormwater controls and conveyances to manage stormwater during active operations, over interim cover soils, and upon final closure. Upon landfill closure, stormwater will be collected and conveyed through a network of ditches, berms, and down-drain pipes to the perimeter surface water management system. Plans and details illustrating the stormwater management system are provided in the Closure Plan Drawings.

2.4 Largest Area Requiring Cover System

The Phase 1 permitted area of 22.6 acres is the largest area that will need to be capped.

2.5 Estimated Maximum Waste Inventory

The proposed landfill design provides approximately 1,500,000 cubic yards of airspace available for waste placement. Using an assumed in-place waste density of 84 lb/ft³, the available dry tonnage of waste to be placed in the landfill is estimated to be on the order of 1,701,000 tons.

2.6 Closure Schedule

Following the completion of waste placement, a final cover system will be constructed. The primary purpose of a final cover system is to minimize infiltration of stormwater into the waste, thus limiting generation of leachate. The proposed final cover system cross section is presented in the Closure Plan Drawings.

Final closure of the landfill will commence when final design grades are achieved, Duke Energy declares that no more waste will be accepted, or as directed by the North Carolina Department of Environment and Natural Resources (NCDENR) Division of Waste Management – Solid Waste Section (the Division). Duke Energy may elect to close the landfill incrementally during landfill operations once an area large enough to warrant cover system construction has reached final grades. Prior to beginning closure of the proposed landfill, the Owner or Operator shall notify the Division that a notice of intent to close the landfill has been placed in the operating record. Closure activities for the landfill shall begin no later than 30 days after final receipt of waste unless otherwise approved by the Division or, if the landfill has remaining capacity and there is a reasonable likelihood that the landfill will receive additional wastes, no later than one year after the most recent receipt of wastes. Extensions beyond the one-year deadline for beginning closure may be granted by the Division if the Owner or Operator demonstrates that the landfill has the capacity to receive additional wastes and the Owner or Operator has taken and will continue to take the steps necessary to prevent threats to human health and the environment from the unclosed landfill.

The final cover system will be finished within 180 days following the beginning of closure activities unless otherwise approved by the Division. Extensions of the closure period may be granted by the Division if the Owner or Operator demonstrates that closure will, of necessity, take longer than 180 days and they have taken and will continue to take the necessary steps to prevent threats to human health and the environment from the unclosed landfill unit. The final cover system for the closed phase will be certified by a professional engineer as being completed. Duke Energy shall record a notation on the deed to the landfill property stating

that the property has been used as a landfill and its use is restricted under the Closure/Post-Closure Plan approved by the Division. The Division will be notified by Duke Energy of the closure completion, certification, deed notation, and placement of these records into the landfill's operating record.

Following cover system construction, the landfill will be vegetated with grass and maintained. A final cover will be established over the landfill unit being closed. The maximum waste-filled area of the proposed landfill that would require closure operations at any one time is approximately 22.6 acres. If the landfill is closed prior to reaching capacity, revised closure drawings will be submitted to the Division for approval.

3. POST-CLOSURE PLAN

The Post-Closure Plan outlines the monitoring and maintenance activities intended to maintain cover system integrity during the post-closure period, which is proposed to be 30 years. During the post-closure period the landfill cover system and related facilities must be monitored and maintained.

3.1 Maintenance Activities

Maintenance activities will be required for the final cover system to remain functional. The vegetative cover shall be mowed a minimum of once a year. The vegetative cover shall be amended and fertilized as needed to maintain healthy vegetation. Depressions in the cover that pond water or otherwise impair the function of the final cover will be filled and/or regraded. Areas subject to regrading will be revegetated. Animal burrows and eroded areas should be filled in with compacted soil and reseeded. If vegetative cover is not adequate in a particular area, fertilizer should be applied and the area reseeded in order to re-establish vegetation. Insecticides may be used to eliminate insect populations that are detrimental to the vegetation. Any deep-rooted or woody vegetation that may have established itself on the cover soil will be removed. In addition to maintenance of the vegetative cover, any items noted as requiring maintenance in Section 3.2 Monitoring Activities would also require maintenance.

3.2 Monitoring Activities

Post-closure monitoring will be conducted quarterly for the first two years and semi-annually thereafter for the remainder of the post-closure period. The following cover system and landfill components will be monitored:

- security measures such as fences, gates, locks, and other measures that control site and facility access;
- surface water management systems for signs of erosion, sedimentation, and condition;
- cover system for signs of erosion;
- cover system for evidence of settlement or subsidence;
- condition and/or presence of vegetation (for distressed or dying vegetation or woody vegetation with potential to penetrate the low permeability barrier);
- condition of the groundwater monitoring wells and gas venting system

Post-closure monitoring will be documented on post-closure monitoring forms. Post-Closure Monitoring Form sheets are provided in Appendix I. Completed post-closure monitoring forms will be maintained in the facility operating record.

3.2.1 Groundwater Monitoring

The Groundwater Monitoring Plan will be continued semi-annually (or as required) after final closure. The results of the analytical testing will be submitted to NCDENR as directed in the Groundwater Monitoring Plan.

3.2.2 Surface Water Monitoring

Surface water monitoring of the downgradient tributaries to Belews Lake will be continued after closure as required by the NCDENR Division of Waste Management. Surface water discharged from the sediment basins will be sampled and analyzed if required by the NPDES stormwater permit.

3.3 Facility Contact

The post-closure maintenance of the landfill will be the responsibility of Duke Energy. Correspondence should be directed to:

On-Site Environmental Professional

Duke Energy Carolinas, LLC – Belews Creek Steam Station
3195 Pine Hall Road, Belews Creek, North Carolina 27009
(336) 445-0746

Facility Contact: Station Sponsor for Landfill Operations or Environmental Professional

The landfill physical address and office information are the same as above.

3.4 Post-Closure Planned Use


Following closure operations, the landfill will be closed and vegetation will be planted and maintained. Duke Energy will maintain control of, and limit access to the facility. No post-closure use is proposed at this time. In the event the post-closure planned use is changed, Duke Energy shall obtain prior approval from NCDENR.

3.5 Certification

Consistent with regulations, the end of the closure-post closure period must be certified by a registered professional engineer. To accomplish certification over the required 30-year duration, a registered professional engineer will prepare annual certifications. The annual certifications will document that the cover system has been monitored and maintained in accordance with the Post-Closure Plan. The annual certifications shall be based on observations and results documented on regular post-closure monitoring reports, maintenance records, and compliance monitoring reports maintained in the Operating Record.

BELEWS CREEK STEAM STATION FGD RESIDUE LANDFILL

STOKES COUNTY, NORTH CAROLINA

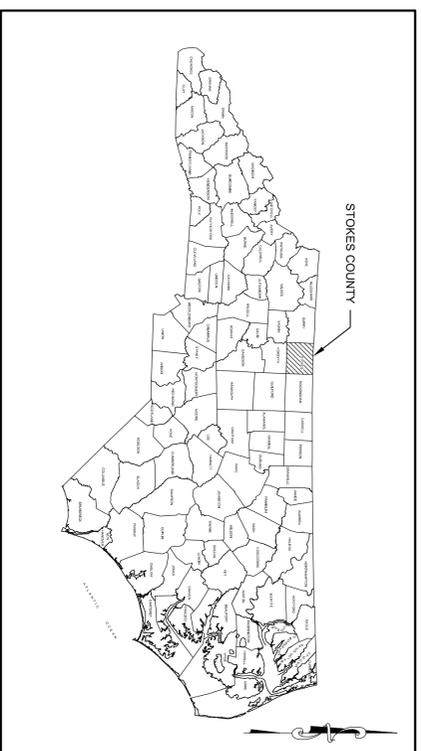


STATE
COUNTY LOCATION MAP

OWNER INFORMATION

PREPARED FOR: DUKE ENERGY CAROLINAS, LLC
 ADDRESS: 5750 SOUTH PARKWAY
 CHARLOTTE, NC 28202
 CONTACT: STATION SPONSOR FOR LANDFILL OPERATIONS
 OR ENVIRONMENTAL PROFESSIONAL
 (336) 445-0746

PROPERTY INFORMATION

ADDRESS: 3195 PINE HALL ROAD
 BELEWS CREEK, NC 27009
 NC FACILITY ID: 8695
 ACREAGE: 264.8

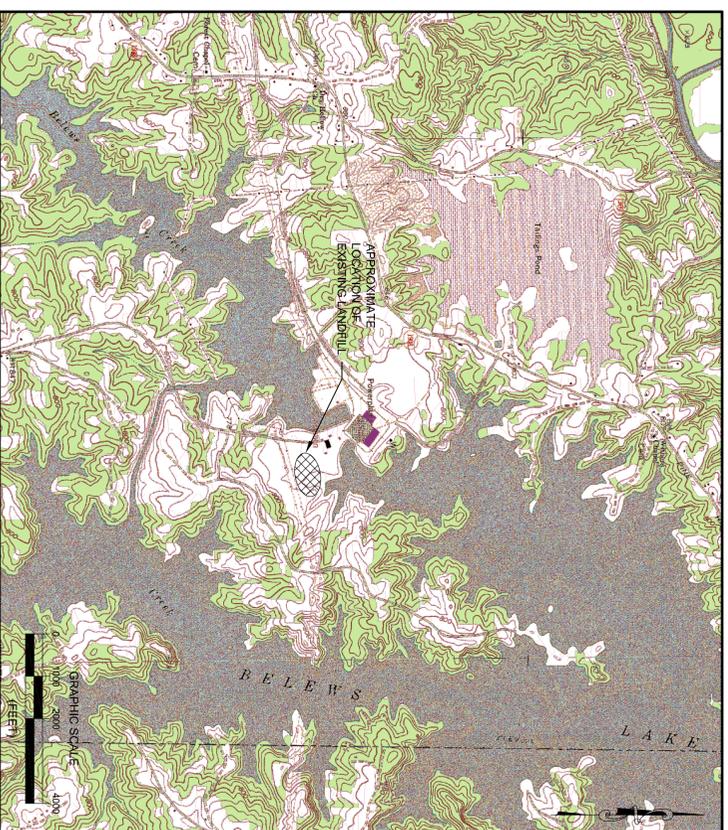

VICINITY MAP

DRAWING INDEX

SHEET	DESCRIPTION
CP-1	TITLE SHEET
CP-4	LEGEND AND GENERAL NOTES
CP-01	FINAL CLOSURE PLAN
CP-02	CLOSURE DETAILS
CP-03	CLOSURE DETAILS

CLOSURE PLAN

MAY 11, 2012

<h2 style="margin: 0;">TITLE SHEET</h2>	
---	--

BELEWS CREEK STEAM STATION, FGD RESIDUE LANDFILL
 STOKES COUNTY, NORTH CAROLINA



2211 W. MEADOWVIEW ROAD
 GREENSBORO, NC 27407
 PHONE: (336) 323-0092
 NC CORP LIC: C-0782

DESIGNED: MAS
 DRAWN: RWH
 CHECKED: EEA
 APPROVED: MAS
 DATE: 05/11/12



© 2012 Joyce Engineering, Inc.
 All rights reserved.

DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	CK	APP

PROJECT NO. 845.1202.11.01	SCALE NO SCALE
DRAWING NO. CP-T	

CONVENTIONAL SYMBOLS AND GENERAL NOTES

ENVIRONMENTAL MONITORING FEATURES

- MM-X EXISTING GROUNDWATER MONITORING WELL
- MM-# PROPOSED GROUNDWATER MONITORING WELL
- MM-OW-# PROPOSED OBSERVATION WELL
- MM-QW-X PROPOSED OBSERVATION WELL
- NES-OW-X EXISTING NES WELL
- NES-OW-# PROPOSED NES WELL
- MM-PW-X EXISTING PERFORMANCE WELL
- MM-PW-# PROPOSED PERFORMANCE WELL
- MM-#W-# EXISTING SENTINEL WELL
- MM-X PROPOSED SENTINEL WELL
- MM-# WETLANDS HEZOMETER
- PZ-# PIEZOMETER
- SMP-X SURFACE WATER MONITORING POINT
- LMP-1 LEACHATE MONITORING POINT
- B-X BORE HOLE LOCATION
- C-X CORING LOCATION
- SS-X SOIL SAMPLING LOCATION
- TP-X TEST PIT LOCATION
- S-X WELL LOCATION
- S-X SPRINGHEAD LOCATION

LANDFILL GAS FEATURES

- EM-X EXISTING EXTRACTION WELL
- EW-# PROPOSED EXTRACTION WELL
- △ GW-X EXISTING LEACHATE CLEAN-OUT GAS EXTRACTION WELL
- △ GW-# PROPOSED LEACHATE CLEAN-OUT GAS EXTRACTION WELL
- ◇ GP-X GAS PROBE
- △ GV-X EXISTING GAS VENT
- △ GV-# PROPOSED GAS VENT
- CONDENSATE TRAP
- CLEAN-OUT
- VALVE DESIGNATION (SEE SCHEDULE)

SURVEY FEATURES

- ◆ BM BENCHMARK
- ▲ CP CONTROL POINT
- PROPERTY LINE
- EASEMENT
- RIGHT OF WAY
- FENCE LINE
- RAILROAD
- GUARDRAIL
- RESOURCE PROTECTION AREA

UTILITIES

- UTILITY POLE
- HYDRANT
- LIGHT POLE
- TANK (SIZE VARIES)
- TRANSFORMER
- MANHOLE
- CLEANOUT
- VALVE
- OVERHEAD ELECTRIC
- UNDERGROUND ELECTRIC
- OVERHEAD TELEPHONE
- UNDERGROUND TELEPHONE
- LEACHATE FORCE MAIN
- DUAL CONTAINED LEACHATE FORCE MAIN
- SANITARY SEWER
- PROCESS SEWER
- LANDFILL GAS LINE
- NATURAL GAS LINE
- POTABLE WATER
- SOLID PIPE (TYPE NOTED)
- PERFORATED PIPE (TYPE NOTED)
- CULVERT (SIZE NOTED)

LANDFILL AND ROAD FEATURES

- PAVED ROAD
- GRAVEL/DIRT ROAD
- EDGE OF PAVEMENT
- LIMIT OF WASTE/EDGE OF LINER
- FACILITY BOUNDARY/CELL LIMITS/PHASE LIMITS

BUILDINGS AND STRUCTURES

- BUILDING
- DAM
- FOUNDATION

HYDROLOGY

- APPROXIMATE 100 YEAR FLOOD PLAIN
- DITCH FLOW
- STREAM OR RIVER

VEGETATION

- SINGLE TREE
- TREE LINE
- SHRUB

EROSION AND SEDIMENT CONTROL FEATURES

- SILT FENCE
- INLET PROTECTION
- OUTLET PROTECTION (SIZE VARIES)
- DIVERSION BERM

TOPOGRAPHICAL FEATURES

- EXISTING 10' TOPO CONTOUR
- EXISTING 2' TOPO CONTOUR
- PROPOSED 10' TOPO CONTOUR
- PROPOSED 2' TOPO CONTOUR
- GROUNDWATER SURFACE CONTOUR (FT ABOVE MEAN SEA LEVEL)
- BEDROCK SURFACE CONTOUR (FT ABOVE MEAN SEA LEVEL)
- SPOT ELEVATION
- GRADE BREAK AND RUNOFF FLOW DIRECTION

HATCHING

- WETLANDS
- RIPRAP
- WASHED STONE
- BUFFER AREA
- PROPOSED ROAD
- COMPACTED BACKFILL

SURVEY NOTES:

1. TOPOGRAPHIC CONTOUR INTERVAL = 2 FEET, UNLESS INDICATED OTHERWISE.
2. ON-SITE TOPOGRAPHY PROVIDED BY OWNER.

GENERAL NOTES:

1. CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR INITIATING, MAINTAINING, AND SUPERVISING ALL SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK. CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE LAWS AND REGULATIONS RELATING TO THE SAFETY OF PERSONS OR PROPERTY, AND TO THE PROTECTION OF THE ENVIRONMENT. CONTRACTOR SHALL MAINTAIN ALL NECESSARY SAFEGUARDS FOR SUCH SAFETY AND PROTECTION.

GENERAL EROSION AND SEDIMENT CONTROL NOTES:

1. UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE CONSTRUCTED AND MAINTAINED ACCORDING TO MINIMUM STANDARDS AND SPECIFICATIONS OF THE NC EROSION AND SEDIMENT CONTROL HANDBOOK AND NC REGULATIONS.
2. ALL DISTURBED AREAS ARE TO DRAIN TO APPROVED SEDIMENT CONTROL MEASURES AT ALL TIMES DURING LAND DISTURBING ACTIVITIES AND DURING SITE DEVELOPMENT UNTIL FINAL STABILIZATION IS ACHIEVED.
3. THE CONTRACTOR SHALL INSPECT ALL EROSION CONTROL MEASURES PERIODICALLY AND AFTER EACH RUNOFF-PRODUCING RAINFALL EVENT. ANY NECESSARY REPAIRS OR CLEANUP TO MAINTAIN THE EFFECTIVENESS OF THE EROSION CONTROL DEVICES SHALL BE MADE IMMEDIATELY.
4. PERMANENT OR TEMPORARY SOIL STABILIZATION SHALL BE APPLIED TO DENUDED AREAS WITHIN SEVEN DAYS AFTER THE GRADE IS BROKEN. TEMPORARY SOIL STABILIZATION OF THE SITE SHALL BE APPLIED WITHIN SEVEN DAYS TO DENUDED AREAS THAT MAY NOT BE A FINAL GRADE BUT WILL REMAIN DOMINANT (UNDISTURBED) FOR LONGER THAN 30 DAYS. PERMANENT STABILIZATION SHALL BE APPLIED TO AREAS THAT ARE TO BE LEFT DORMANT FOR MORE THAN ONE YEAR.

BELEWS CREEK STEAM STATION, FGD RESIDUE LANDFILL
STOKES COUNTY, NORTH CAROLINA


LEGEND AND GENERAL NOTES



2211 W. MEADOWVIEW ROAD
GREENSBORO, NC 27407
PHONE: (336) 323-0092
NC CORP LIC: C-0782

DESIGNED MAS
DRAWN RWH
CHECKED EEA
APPROVED MAS
DATE 05/11/12

© 2012 Joyce Engineering, Inc.
All rights reserved.




DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	CK	APP

PROJECT NO.
845.1202.11.01

SCALE
NO SCALE

DRAWING NO.
CP-1

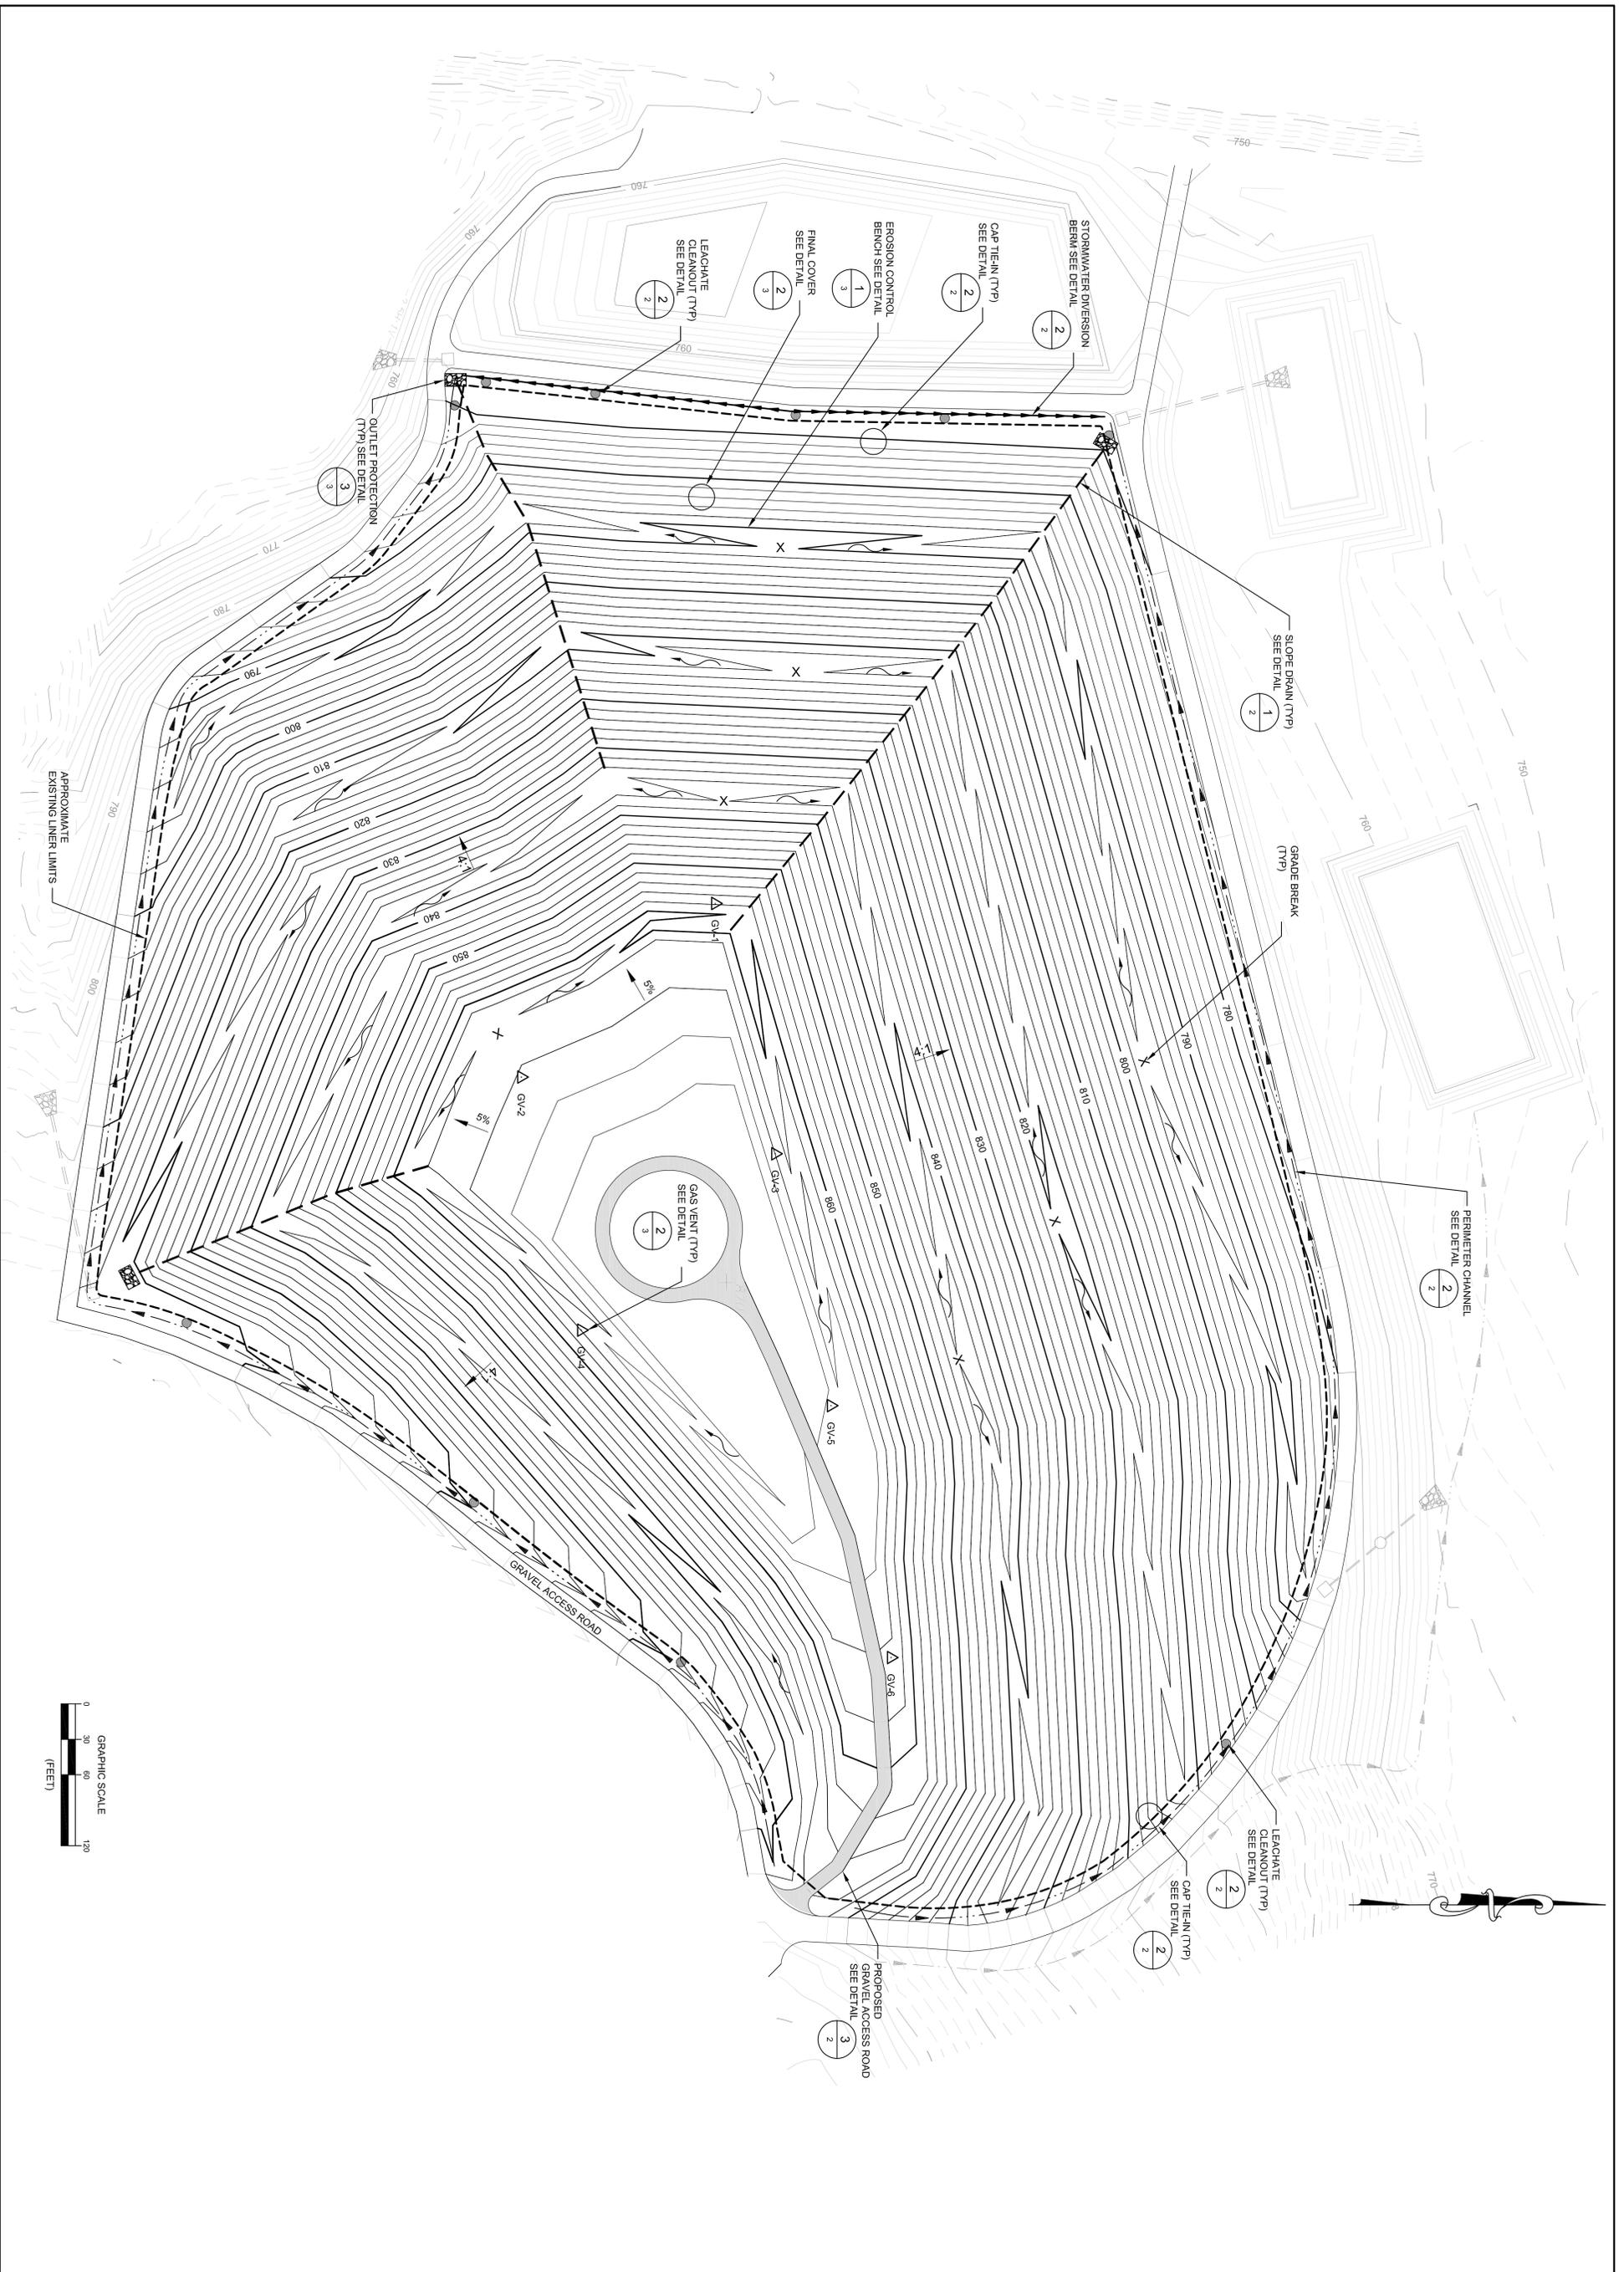

PROJECT NO.
845.1202.11.01

SCALE
AS SHOWN

DRAWING NO.
CP-1

BELEWS CREEK STEAM STATION, FGD RESIDUE LANDFILL
STOKES COUNTY, NORTH CAROLINA


FINAL CLOSURE PLAN

JOYCE ENGINEERING

2211 W. MEADOWVIEW ROAD
GREENSBORO, NC 27407
PHONE: (336) 323-0092
NC CORP LIC: C-0782





DESIGNED MAS
DRAWN RWH
CHECKED EEA
APPROVED MAS
DATE 05/11/12

© 2012 Joyce Engineering, Inc.
All rights reserved.



DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	CK	APP





NOTES:
 EXISTING LEACHATE HEADER PIPE ELBOW AND FLANGED END TO BE
 REMOVED AND PIPE EXTENDED AS SHOWN BELOW.

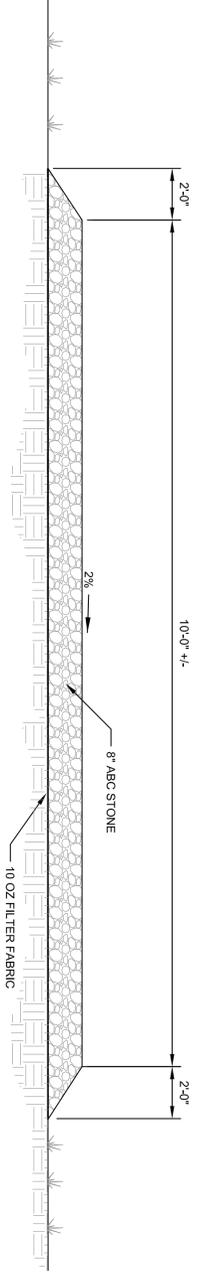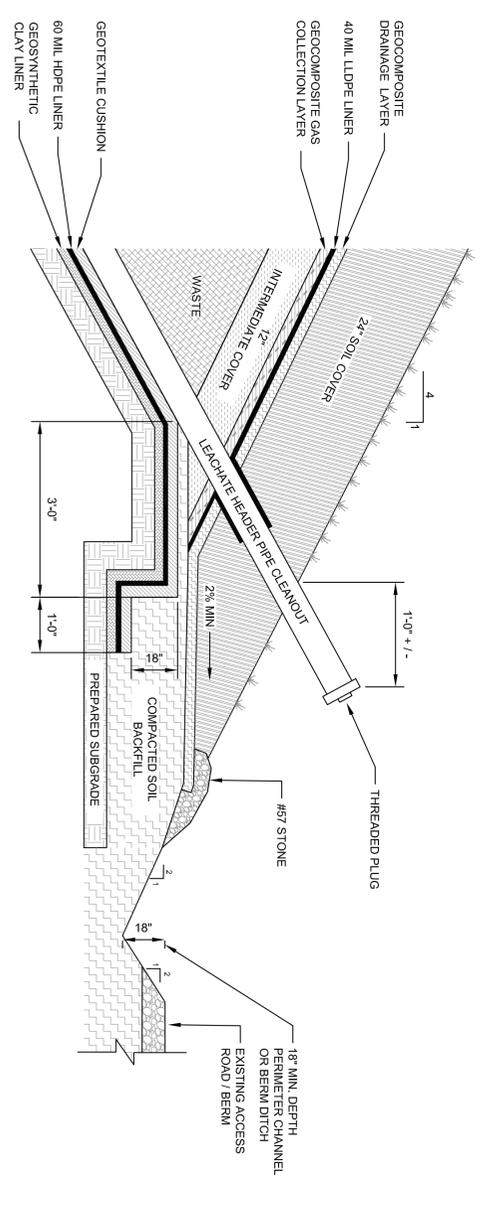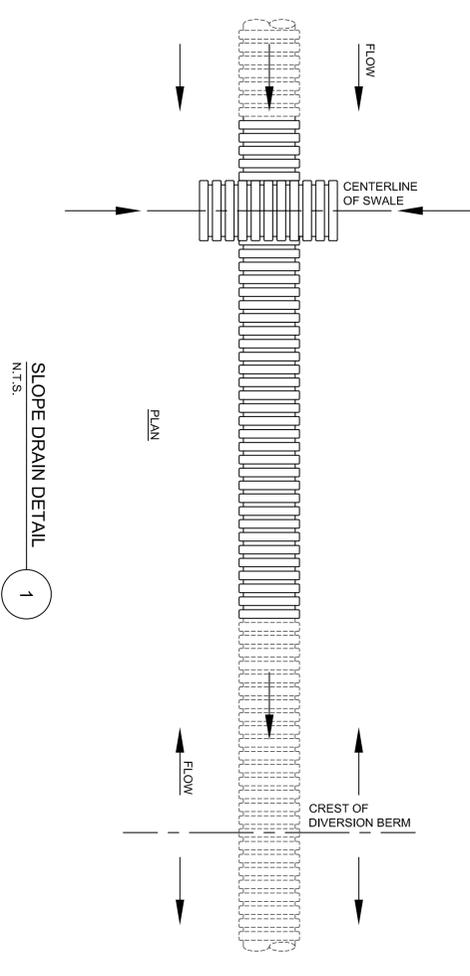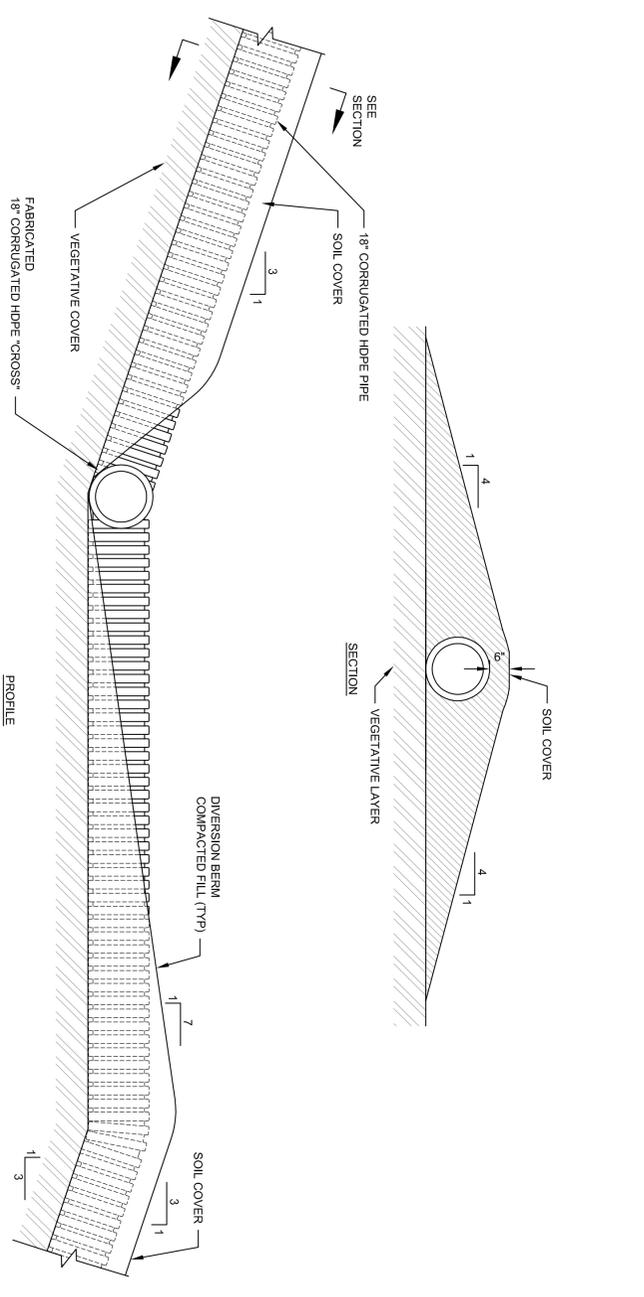

2
 CAP TIE-IN AND
 SIDE SLOPE LINER
 N.T.S.

3
 GRAVEL ACCESS ROAD
 DETAIL
 N.T.S.

PROJECT NO. 845.1202.11.01	BELEWS CREEK STEAM STATION, FGD RESIDUE LANDFILL STOKES COUNTY, NORTH CAROLINA		 2211 W. MEADOWVIEW ROAD GREENSBORO, NC 27407 PHONE: (336) 323-0092 NC CORP LIC: C-0782	DESIGNED MAS DRAWN RWH CHECKED EEA APPROVED MAS DATE 05/11/12		DATE _____	REVISIONS AND RECORD OF ISSUE	NO BY CK APP
	SCALE AS SHOWN	CLOSURE DETAILS		DRAWING NO. CP-2				

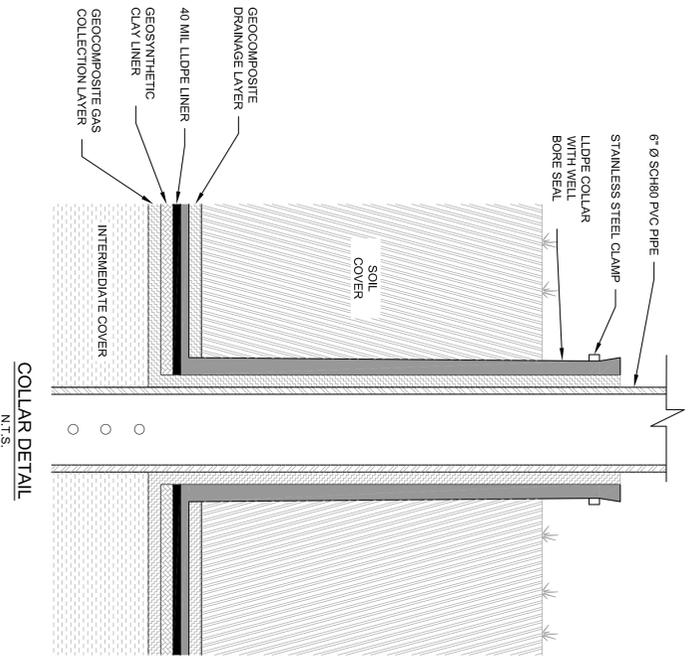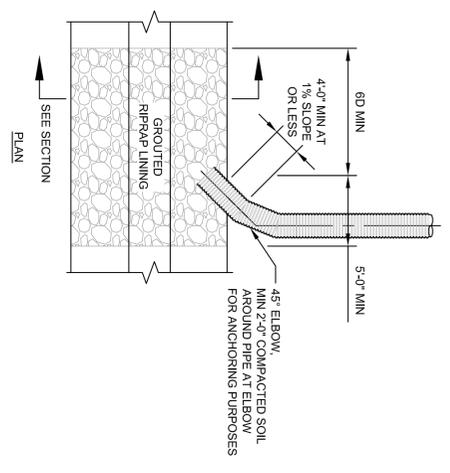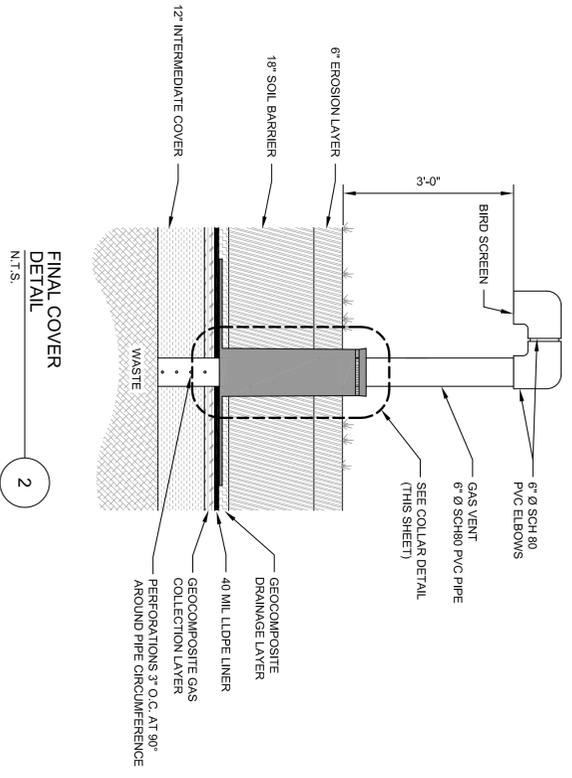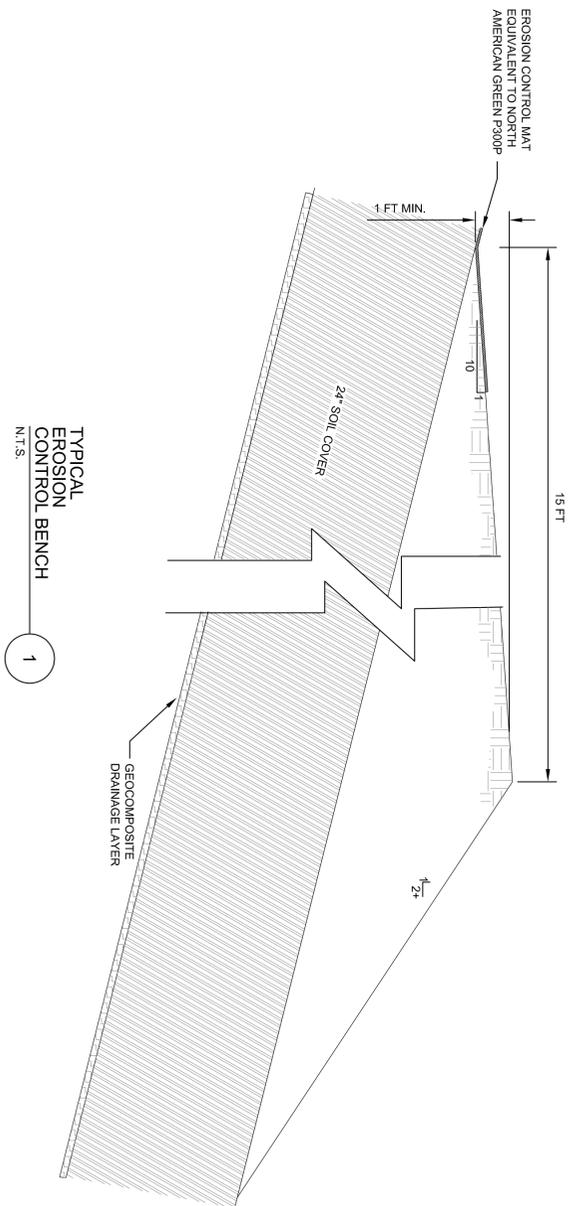

BELEWS CREEK STEAM STATION, FGD RESIDUE LANDFILL STOKES COUNTY, NORTH CAROLINA	2211 W. MEADOWVIEW ROAD GREENSBORO, NC 27407 PHONE: (336) 323-0092 NC CORP LIC: C-0782	DESIGNED MAS DRAWN RWH CHECKED EEA APPROVED MAS DATE 05/11/12		DATE REVISIONS AND RECORD OF ISSUE NO BY CK APP
		PROJECT NO. 845.1202.11.01		
CLOSURE DETAILS		SCALE AS SHOWN		
DRAWING NO. CP-3				

**Opinion of Closure Cost:
FGD Residue Landfill
Belews Creek Steam Station
Duke Energy Carolinas, LLC**

ITEM	UNIT	QUANTITY	UNIT COST	COST \$
FINAL CAP SYSTEM- 22.6 ACRES (PHASE 1)				
Intermediate Cover (demo and fine grading)	acre	23	\$4,500.00	\$103,500
Geocomposite Gas Collection Layer	sf	984,456	\$0.50	\$492,228
Geomembrane (40 mil)	sf	984,456	\$0.63	\$620,207
Geonet Composite (Drainage Layer)	sf	984,456	\$0.98	\$964,767
Protective cover (18")	cy	54,692	\$4.00	\$218,768
Topsoil (6")	cy	18,231	\$4.50	\$82,040
Subtotal				\$2,481,510
SEDIMENTATION AND EROSION CONTROLS				
Diversion Berms				
Construction and lining	lf	6,800	\$13.00	\$88,400
Slope Drains				
Pipe and Installation	lf	1,200	\$43.12	\$51,744
Drainage Bench Inlet	each	3	\$300.0	\$900
Conveyance Channels				
Riprap Channels	lf	0	\$57.50	\$0
Grass-lined Channels	lf	0	\$25.00	\$0
Drainage Pipe	lf	0	\$40.00	\$0
Miscellaneous				
Outlet Protection (RipRap)	each	3	\$10,000.00	\$30,000
Silt Fence	lf	500	\$3.60	\$1,800
Subtotal				\$172,844
GAS CONTROLS (Vents)	each	6	\$5,000.00	\$30,000
VEGETATIVE COVER	acre	23	\$2,000.00	\$46,000
TOTAL OF ABOVE ITEMS				\$2,730,354
MOBILIZATION / DEMOBILIZATION	(construction only)		5%	\$136,518
ENGINEERING FEE	-	-	2%	\$54,607
CQA	(cap only)	-	6%	\$148,891
CONTINGENCY	-	-	10%	\$273,035
ADMINISTRATION	lump sum	-	-	\$2,500
CLOSURE CERTIFICATION	lump sum	-	-	\$2,500
SURVEY AND DEED	acre	23	\$1,400.00	\$32,200
TOTAL CLOSURE COST (IN 2012 DOLLARS)				\$3,380,605
Cost per acre (for 22.6 acres)				\$149,584.29

Notes:

1. Costs are based on conceptual design and should be considered approximate.

**Opinion of Post-Closure Care Costs:
FGD Residue Landfill
Belews Creek Steam Station
Duke Energy Carolinas, LLC**

ITEM	UNIT	QUANTITY	UNIT COST	ANNUAL COST
INSPECTIONS/ RECORD KEEPING	per trip	4	\$1,000	\$4,000
ROUTINE MAINTENANCE				
Mowing	acre	22.6	\$100	\$2,260
Stormwater Structures	lump sum	1	\$5,000	\$5,000
Roads, Fencing, Gates, Signs, Etc.	lump sum	1	\$3,000	\$3,000
Leachate Collection and Storage	lump sum	1	\$1,000	\$1,000
Subtotal				\$11,260
WELL MAINTENANCE				
Groundwater Wells	lump sum	1	\$1,000	\$1,000
Subtotal				\$1,000
CAP REPAIR	lump sum	1	\$7,500	\$7,500
TOTAL OF ABOVE ITEMS				
				\$23,760
ENGINEERING	-	-	5%	\$1,188
CONTINGENCY	-	-	15%	\$3,564
TOTAL ANNUAL POST-CLOSURE COST (IN 2012 DOLLARS)				\$28,512
Cost Per Year Per Acre (for 22.6 acres)				\$1,262
TOTAL 30-YEAR POST-CLOSURE COST (IN 2012 DOLLARS)				\$855,360

Notes:

1. All costs include labor by a third party.
2. Cap repair assumes that five acres will require repair during the period.
3. Maintenance cost for groundwater wells assumes replacement of 10 wells during the period.

**Opinion of Potential Assessment Corrective Action Costs:
 FGD Residue Landfill
 Belews Creek Steam Station
 Duke Energy Carolinas, LLC**

ITEM	UNIT	QUANTITY	UNIT COST	ANNUAL COST
MONITORING				
Groundwater/Surfacewater (semi-annually)				
Sampling	per trip	2	\$4,000	\$8,000
Analysis	per trip	2	\$2,500	\$5,000
Reporting	per trip	2	\$2,500	\$5,000
Surface Water (semi-annually)	per trip	2	\$2,100	\$4,200
Subtotal				\$22,200
LEACHATE MONITORING	allowance	1	\$3,600	\$3,600
CORRECTIVE ACTION PLAN ACTIVITIES	per year	1	\$36,000	\$36,000
TOTAL OF ABOVE ITEMS				\$61,800
ENGINEERING	-	-	3%	\$1,854
CONTINGENCY	-	-	5%	\$3,090
TOTAL ANNUAL PACA COST (IN 2012 DOLLARS)				\$66,744
TOTAL 30-YEAR PACA COST (IN 2012 DOLLARS)				\$2,002,320

Notes:

1. All costs include labor by a third party.
2. Water quality monitoring and leachate management costs are estimated.
3. It is assumed that gas monitoring will not be necessary for this site.

Appendix IV

Chimney Drain System

CHIMNEY DRAIN SYSTEM

The Flue Gas Desulfurization (FGD) landfill at the Belews Creek Steam Station receives primarily FGD materials as a byproduct of air quality emissions measures. This predominant waste stream presents a problem when managing leachate from this facility. A traditional landfill that accepts a wide array of wastes typically allows leachate to move through the waste mass to the floor of the cell for collection and removal from the landfill. In contrast, leachate does not flow through the FGD material, but is absorbed into the waste or flows across the surface to a perimeter collection system. This sheet flow, directed at the exterior slopes of the landfill, is difficult to control. Multiple interior drains will help contain the flow within the waste boundary and avoid contaminating traditional stormwater management facilities.

In order to better manage contact water, a chimney drain network has been designed to route leachate through the waste and out of the landfill through the existing leachate outfalls.

Chimney Drain Design

The intent of the chimney drain design is to produce an operationally manageable solution to safely handle contact water. The design uses readily available materials that can successfully be implemented by the landfill operator following an initial construction event to fabricate and install the trunk line systems.

The design utilizes the cell 3 and 4 sump outlets to remove leachate from the system via a 30 inch SDR 26 HDPE pipe. Material properties used in the design of this system are consistent with those used elsewhere in the design of the facility.

The 25 year storm event was used to estimate overall capacity for the system. As the landfill cells 1, 2 and 3 are already filled to approximately the 800 ft amsl elevation at the time of system installation, an appropriate runoff area was used to estimate overland flow to the system inlets.

Chimney Drain Construction

To install the trunkline pipes to the existing sump structures, an adequate sized hole will be cut in the existing perforated riser at or above the flowline of the outlet. The pipe will be extrusion welded around the diameter of the pipe on the interior and exterior of the riser with gussets on the exterior for strength. The pipe will be supported with #57 stone material or bottom ash until such time that the pipe can be laid upon the existing protective cover / FGD waste layer in the cell. The 30 inch pipe will be continuously welded to conform to the bottom

layer of the cell providing a minimum 1% grade to the system outlet. Three feet of cover soil or FGD material will be required to be placed over the pipe before traffic can cross the trunkline. Six 24-inch 'tee' sections will be installed at approximate locations as shown on the design drawings. Drain inlets 1, 2, 5 and 6 will transition from the SDR 26 HDPE immediately to a perforated, double wall corrugated HDPE pipe (ADS N-12 or equivalent). Inlets 3 and 4 will use SDR 26 HDPE vertical extensions until approximately 35 feet below the final grade surface before transitioning to the perforated pipe section.


Chimney Drain Operations

The initial section of N-12 pipe will be 5 feet long with perforations as shown on the design drawings. If the design year storm event occurs during this initial condition, the operator can expect the water to overtop the structure. Therefore, local depressions of up to 5 feet will be left around the drain inlets to prevent widespread ponding on the landfill. The pipe will be encased with a minimum of one foot of #57 drainage stone or bottom ash in order to maintain flow to pipe perforations. A grated inlet on top of the chimney drain will remain in place at all times at each drain to prevent large objects from entering the system.


The fill will be graded to serve up to 5 acres at each of 4 active drains. Once the fill progresses to the top of the grate inlet at any given drain, a perforated riser will be added in maximum 10 foot sections and a stone or bottom ash column maintained as fill is placed around the inlet pipe. Waste shall be graded such that there is always positive flow to the chimney drain system.

Chimney Drain Termination

The waste filling and drain extension operations will continue until either the drain reaches the extent of the fill at an exterior slope, or the final landfill grades have been reached. Once the final elevation of the drain has been verified, the drain will be filled with #57 stone or bottom ash and a permanent cap affixed to the top of the inlet pipe. This cap will be installed approximately 5 feet below the final landfill elevation at that location.

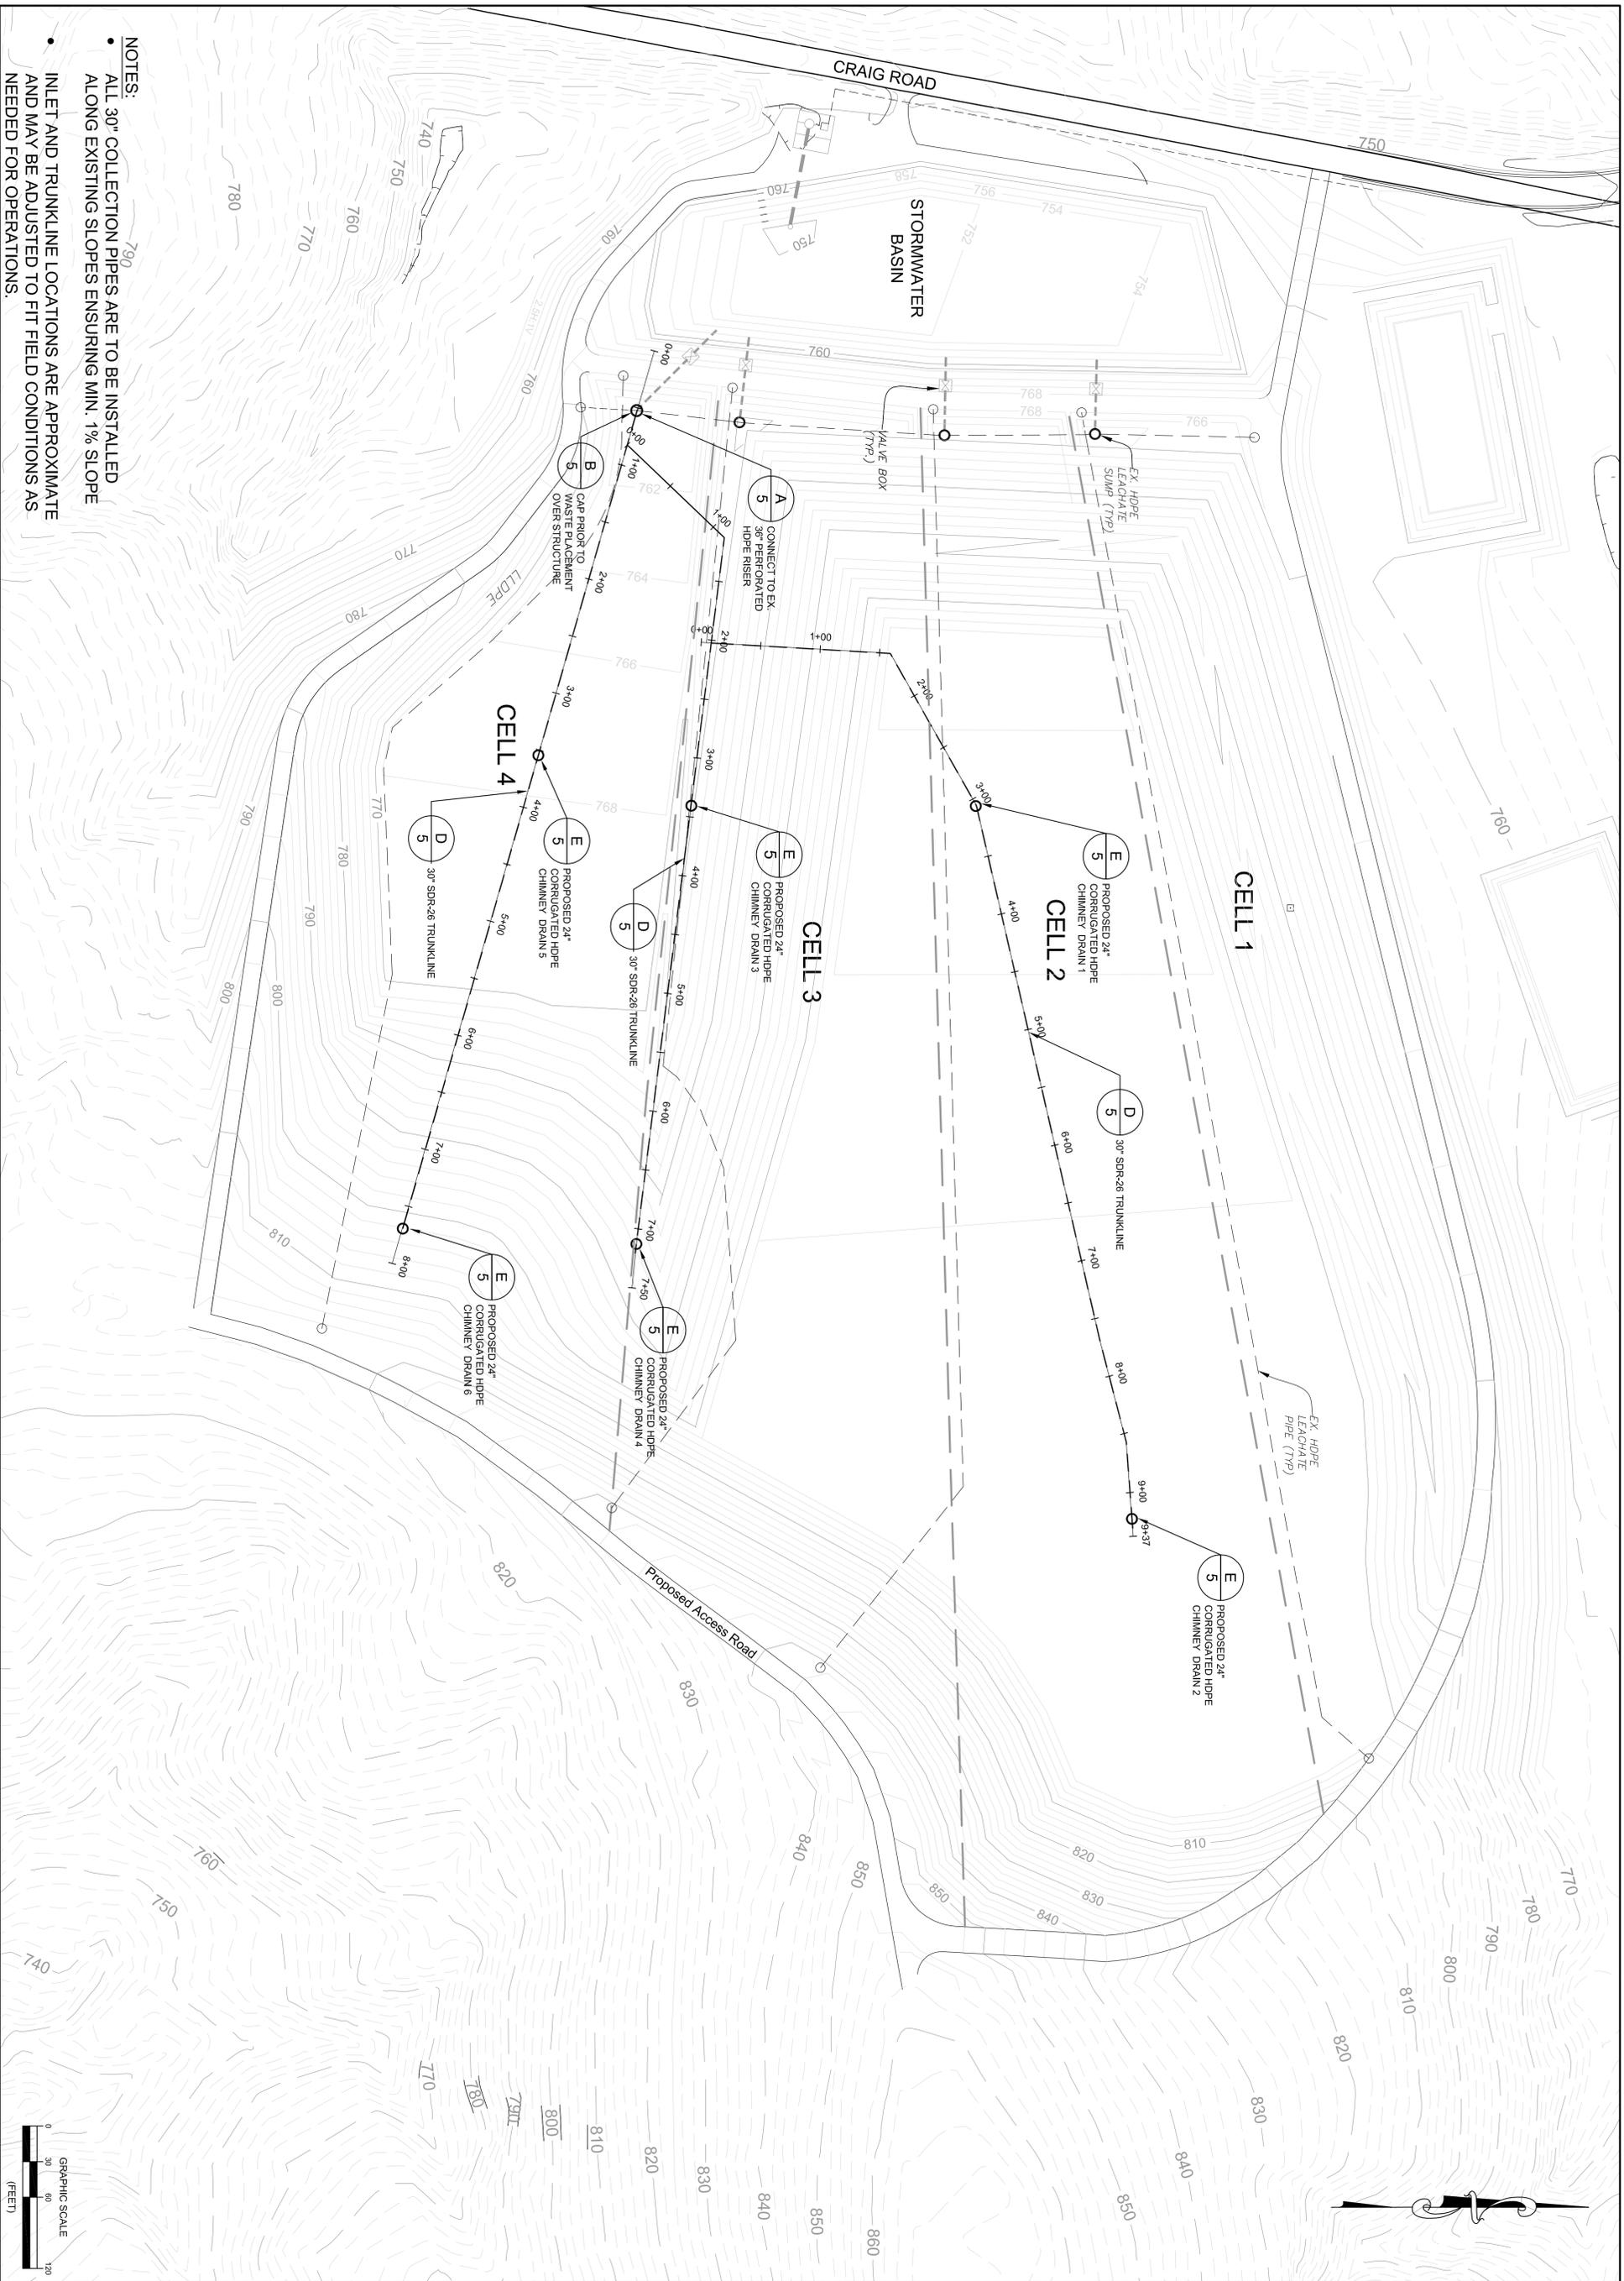

- NOTES:**
- ALL 30" COLLECTION PIPES ARE TO BE INSTALLED ALONG EXISTING SLOPES ENSURING MIN. 1% SLOPE
 - INLET AND TRUNKLINE LOCATIONS ARE APPROXIMATE AND MAY BE ADJUSTED TO FIT FIELD CONDITIONS AS NEEDED FOR OPERATIONS.



<p>PROJECT NO. 845.1101.01</p> <p>SCALE AS SHOWN</p> <p>DRAWING NO. 1</p>	<p>DUKE ENERGY BCSS FGD LANDFILL BELEWS CREEK, NORTH CAROLINA</p> <p>PROPOSED CHIMNEY DRAIN DESIGN OPERATIONAL COVER</p>	<p>ENGINEERING, INC. 2211 W. MEADOWVIEW ROAD GREENSBORO, NC 27407 PHONE: (336) 323-0092 NC CORP LIC: C-0782</p>	<p>DESIGNED: RWH</p> <p>DRAWN: RWH</p> <p>CHECKED: EEA</p> <p>APPROVED: EEA</p> <p>DATE: 6/20/11</p>	<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th style="width:15%;">DATE</th> <th style="width:55%;">REVISIONS AND RECORD OF ISSUE</th> <th style="width:10%;">NO</th> <th style="width:10%;">BY</th> <th style="width:10%;">APP</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	APP															
DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	APP																				



PROJECT NO.
845.1101.01

SCALE
AS SHOWN

DRAWING NO.
2

DUKE ENERGY BCSS FGD LANDFILL
BELWES CREEK, NORTH CAROLINA



PROPOSED CHIMNEY DRAIN DESIGN
PERMITTED FINAL COVER

JOYCE ENGINEERING, INC.
2211 W. MEADOWVIEW ROAD
GREENSBORO, NC 27407
PHONE: (336) 323-0092
NC CORP LIC: C-0782


DESIGNED: RWH
DRAWN: RWH
CHECKED: EEA
APPROVED: EEA
DATE: 6/20/11



DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	CK	APP

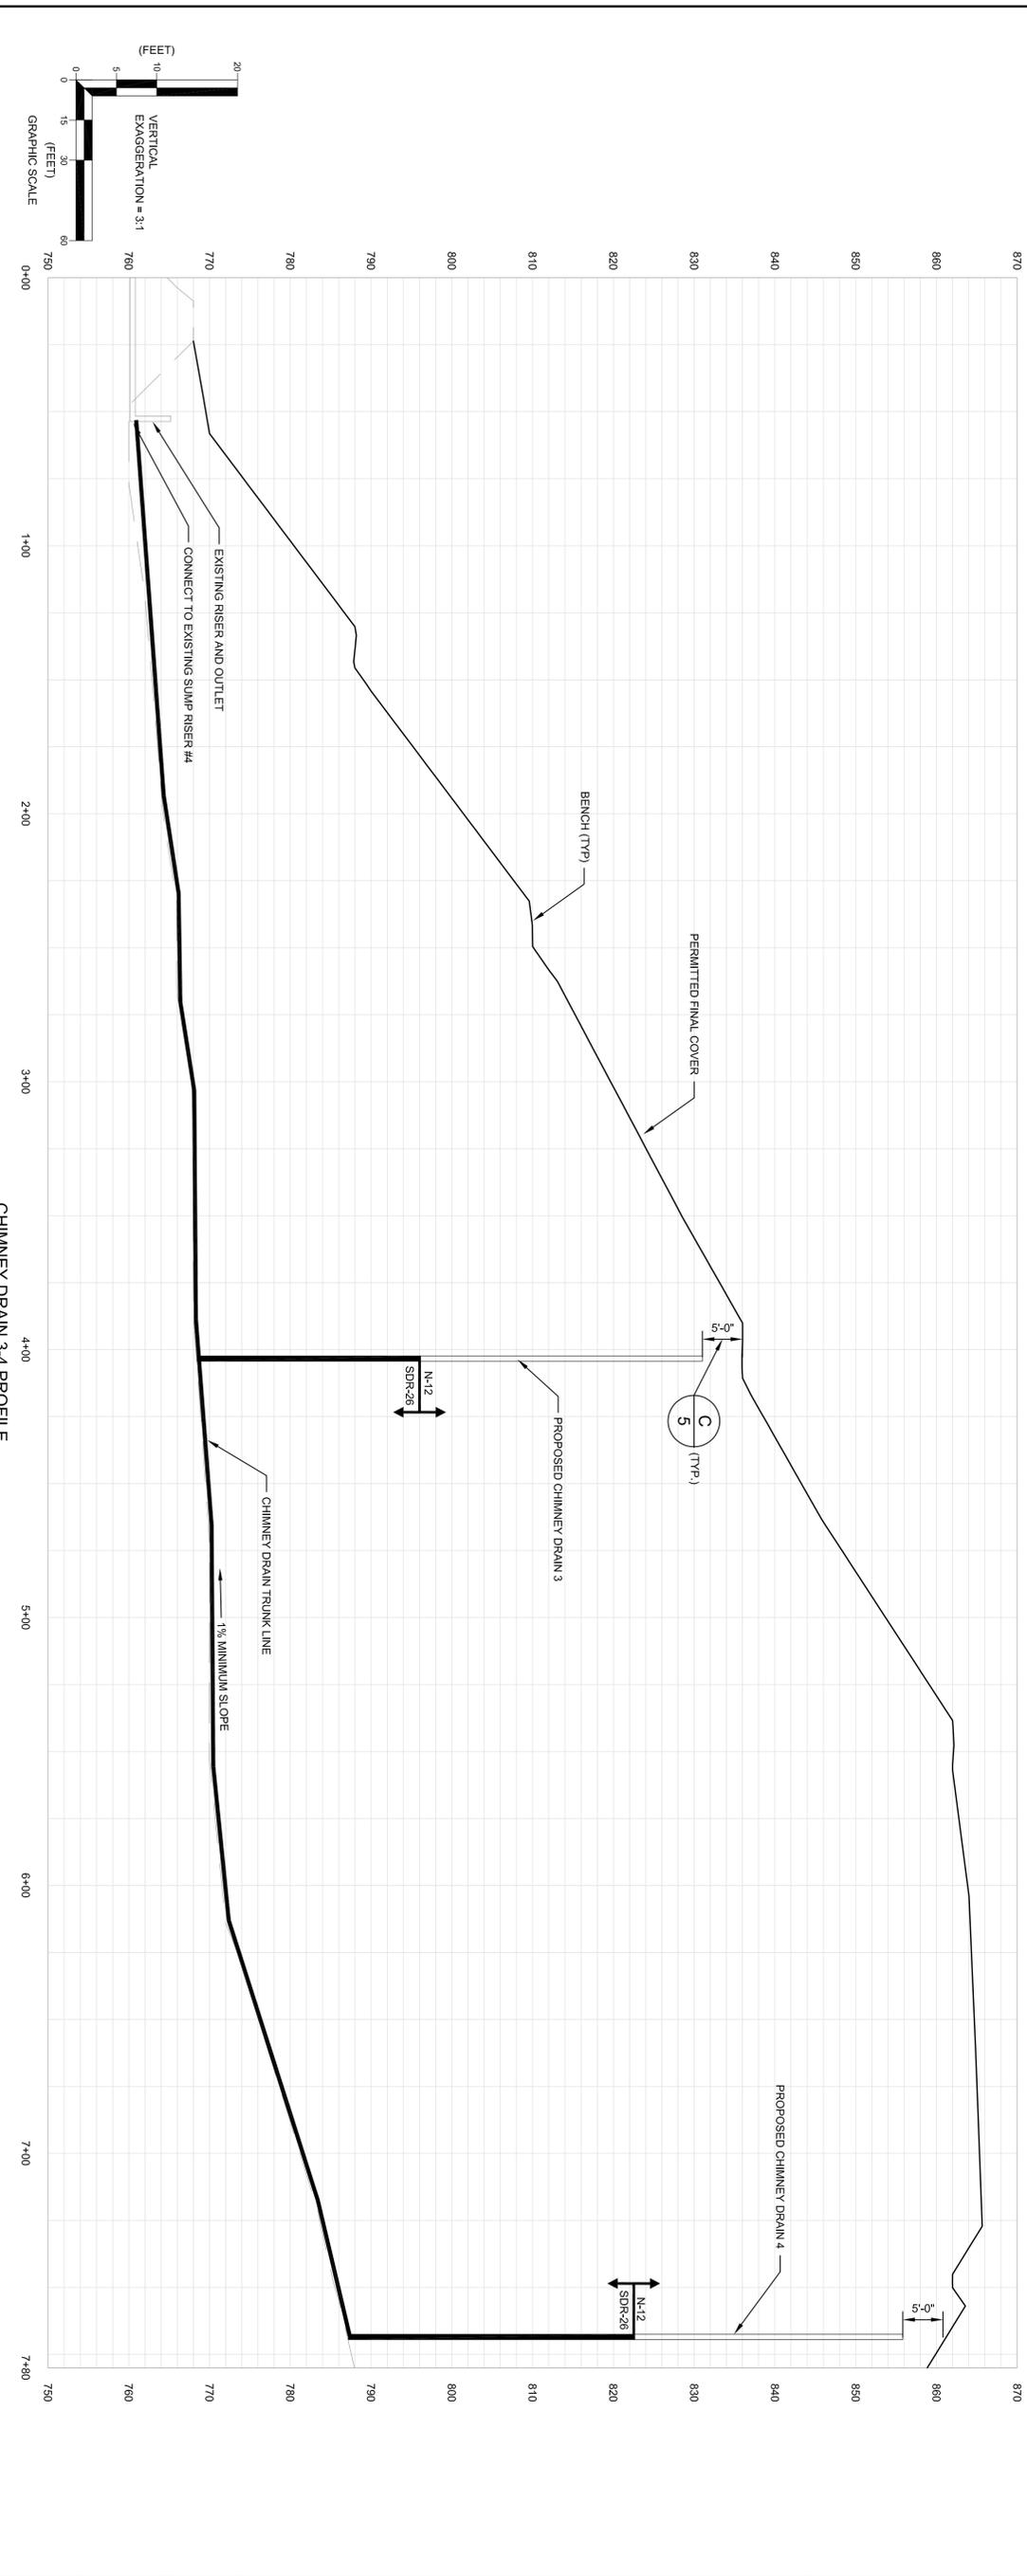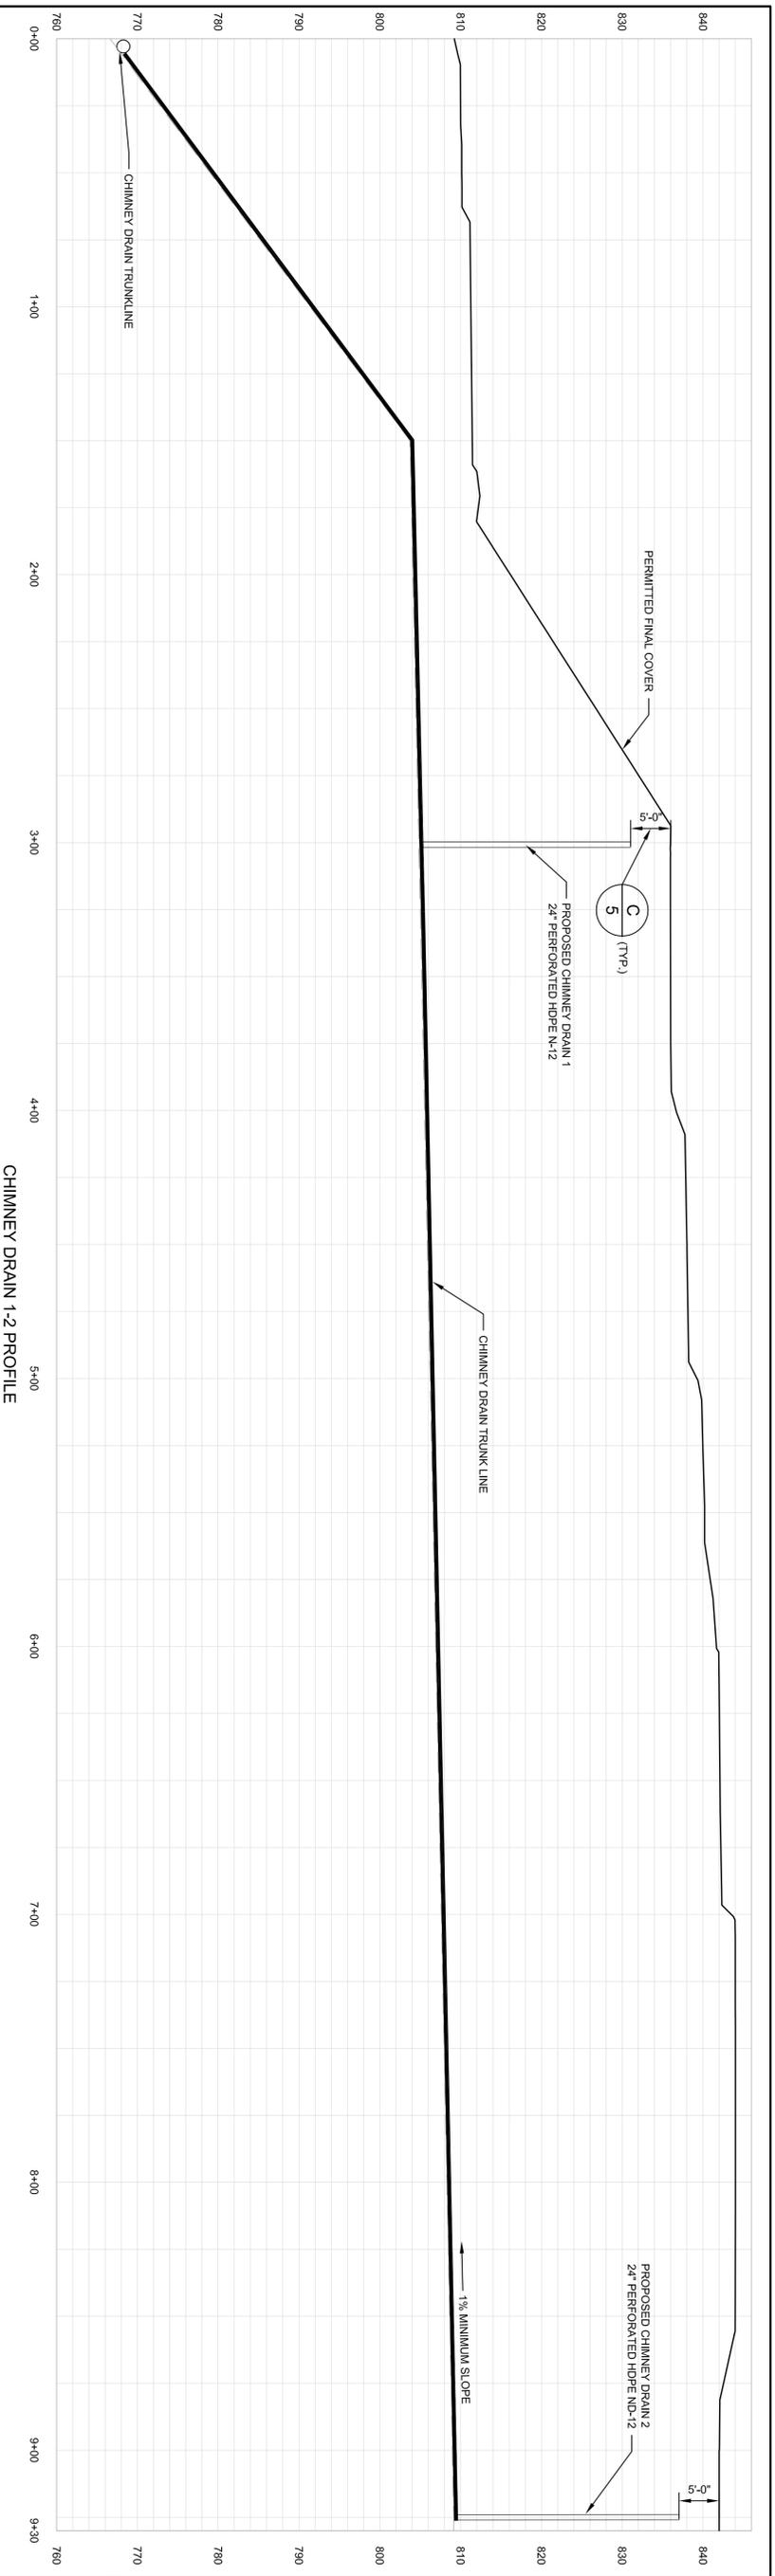

DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	CK	APP



DESIGNED: RWH
 DRAWN: RWH
 CHECKED: EEA
 APPROVED: EEA
 DATE: 6/20/11
 © 2011 Joyce Engineering, Inc.
 All rights reserved.

JOYCE ENGINEERING, INC.
 2211 W. MEADOWVIEW ROAD
 GREENSBORO, NC 27407
 PHONE: (336) 323-0092
 NC CORP LIC: C-0782



DUKE ENERGY BCSS FGD LANDFILL
 BELEWS CREEK, NORTH CAROLINA

**PROPOSED CHIMNEY DRAIN DESIGN
 CHIMNEY DRAIN PROFILE**

PROJECT NO.
845.1101.01

SCALE
AS SHOWN

DRAWING NO.
3

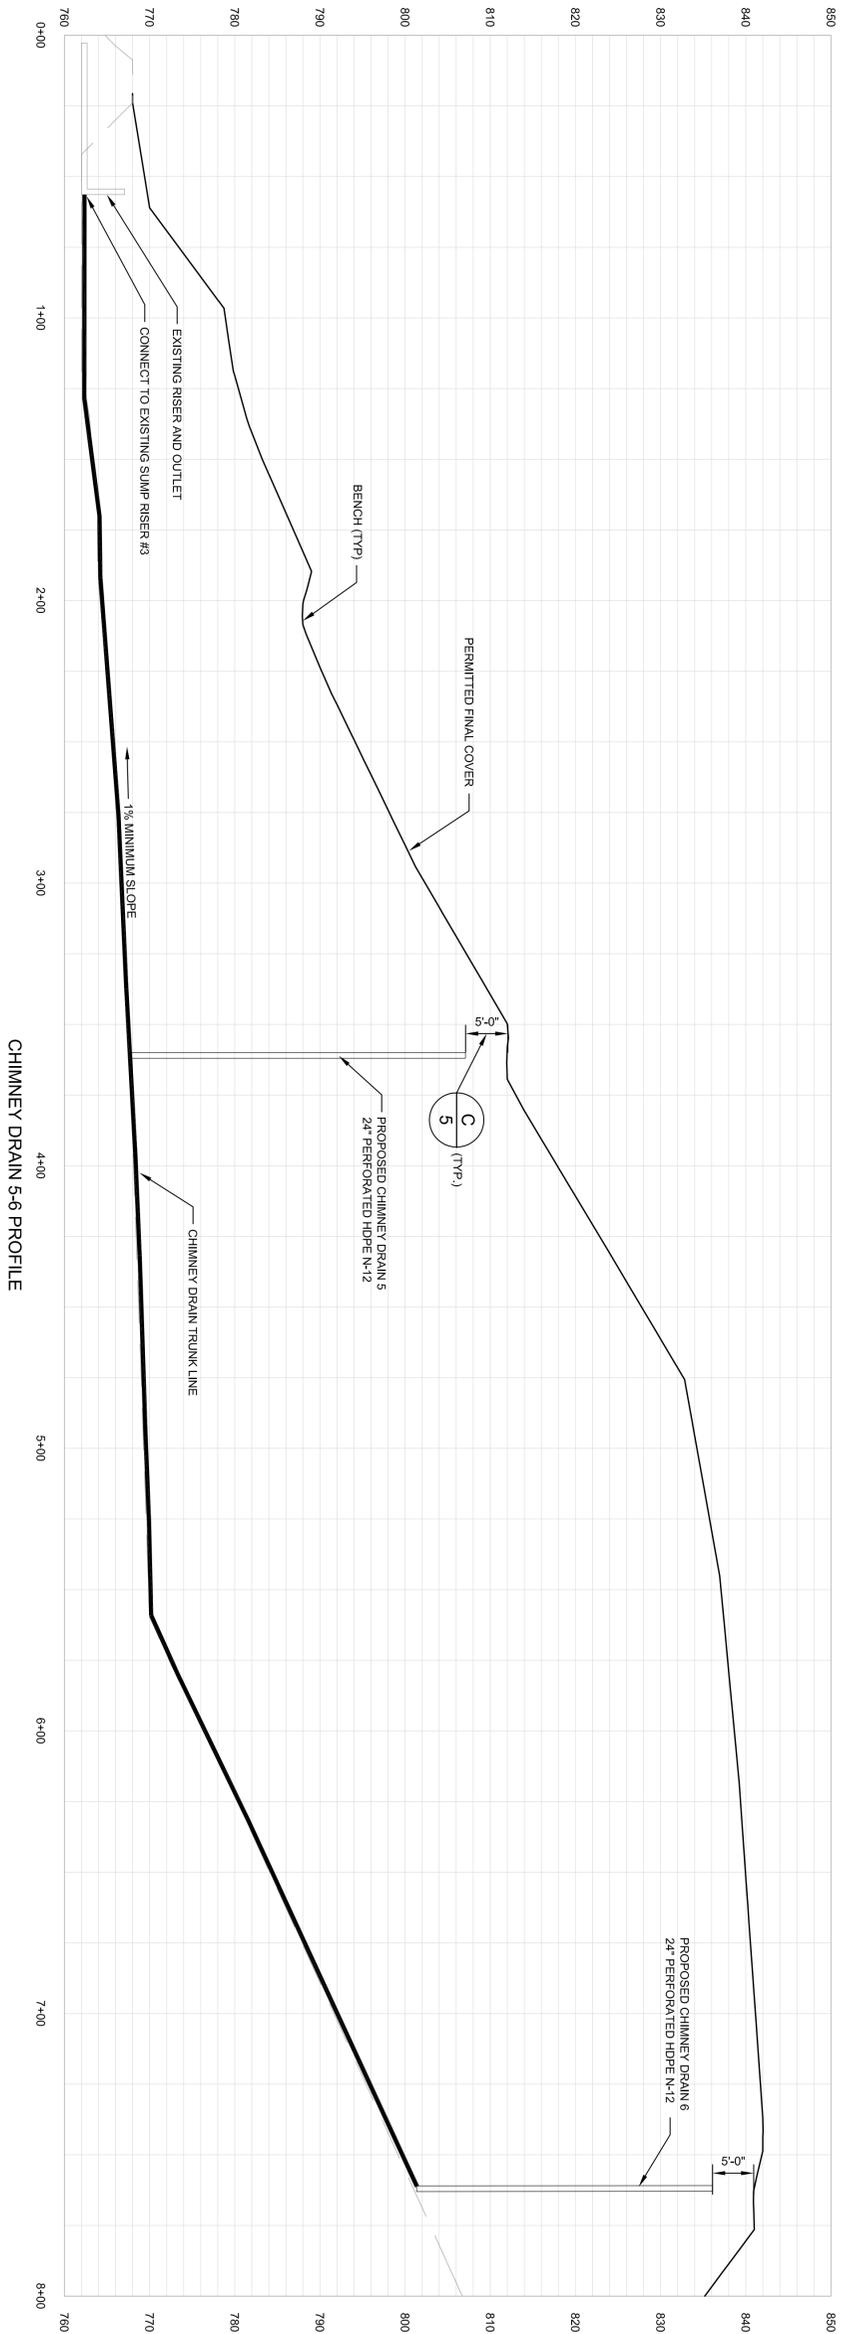

CHIMNEY DRAIN S-6 PROFILE

DUKE ENERGY BCSS FGD LANDFILL
BELEWS CREEK, NORTH CAROLINA

PROPOSED CHIMNEY DRAIN DESIGN
CHIMNEY DRAIN PROFILE

DESIGNED: RWH
DRAWN: RWH
CHECKED: EEA
APPROVED: EEA
DATE: 6/20/11



DATE	REVISIONS AND RECORD OF ISSUE	NO	BY	CK	APP

PROJECT NO.
845.1101.01

SCALE
AS SHOWN

DRAWING NO.
4

Appendix V

Leak Detection System

Leachate Storage Basin – Leak Detection System

During the operational phase of the landfill, the Leachate Storage Basin, located on the west side of the landfill, will collect stormwater that has contacted waste and leachate from cells that contain waste. After operation ceases within a cell, only leachate will drain to the lined storage basin. The liquid collected in this lined basin gravity drains to a pump station, where it is pumped to the station wastewater treatment system.

In addition to the primary geomembrane basin liner, the lined leachate storage basin is equipped with a Leak Detection System, consisting of a secondary geomembrane liner and drainage system that drains to a sump, located on the south end of the basin. The purpose of this system is to detect and to collect liquids that may leak through the primary liner and to pump the liquid to the pump station.

Located inside the 14 inch diameter side slope riser pipe is an electric powered pump and level sensor. The discharge from the pump is piped to the pump station sump.

The control panel for the pump and level sensor is equipped with a dome mounted flashing alarm light that will activate on a high level setting of 2 feet of head. The control panel is equipped with an hour meter, indicating run time for the pump, and a flow totalizer, indicating the quantity of liquid that has been pumped. The readings for the hour meter and for the flow totalizer are to be recorded weekly.

Leak Detection System – Action Leakage Rate Response Plan

The Action Leakage Rate is set at a rate of 50 gallons-per-day collected over a 30 day period. The Action Leakage Rate (ALR) Response Plan for the Leachate Storage Basin Leak Detection System is as follows:

- The NCDENR Solid Waste Regional Office in Winston-Salem is notified.
- Samples of the collected liquid are analyzed for specific conductivity, pH, sulfates, chlorides, and boron. Analytical methods are to be the same as described in the Groundwater Sampling and Analysis Plan.
- Samples of the liquid are collected from within the basin. These samples are subjected to the same analyses.
- The results of these analyses are compared to determine if the source of the collected liquid is the basin.
- The results of the analyses and a summary of the comparison will be sent to the NCDENR Solid Waste Regional Office in Winston-Salem.
- Further actions will be determined based on the results of the comparison of analytical results.

Appendix VI

NCDENR Communications



North Carolina Department of Environment and Natural Resources

Division of Waste Management

Beverly Eaves Perdue
Governor

Dexter R. Matthews
Director

Dee Freeman
Secretary

SOLID WASTE SECTION

July 1, 2011

Mr. Ed Sullivan
Duke Energy Corporation
EC13K/ Post Office Box 1006
Charlotte, North Carolina 28201-1006

Subject: Permit to Operate, Modification, Changes to the Approved Plans
Completeness Determination and Technical Review
Duke Energy, Belews Creek Steam Station, FGD Landfill Facility, Permit No. 8505
Stokes County, DIN 14257

Dear Mr. Sullivan:

On June 22, 2011 the Division of Waste Management (Division) received your application for a Permit to Operate, Modification, Changes to the Approved Plans, for the Duke Energy, Belews Creek Steam Station, FGD Landfill Facility, Permit No. 8505, located in Stokes County. The application was entitled;

Duke Energy, Belews Steam Station, Permit # 85-05, 3195 Pine Hall Road, Belews Creek, NC 27009, JEI Project # 845.1101.12. Prepared for Duke Energy. Prepared by Joyce Engineering. June 2011. DIN 14203.

The application contains a request to modify the Operations Plan with the addition of a Dust Control Plan and the addition of *Chimney Drains* to the Landfill's engineering design. The Division has performed a review of the application for a determination of completeness and determined the application is complete in accordance North Carolina General Statute NCGS 130A-295.8(e). A determination of completeness means the application contains the required components in accordance with North Carolina Administrative Code 15A NCAC 13B .0500. In addition to the determination of completeness the Division has completed the technical review of the application and requests that you respond to the following items in order to expedite the application;

1. According to Division records, Duke Energy of the Carolinas has been invoiced for the appropriate permitting fee; the fee must be paid prior to permit issuance. You may contact Mr. Jeff Skabo, Division Accounting Technician, at (919) 508-8505 for more information.
2. An electronic copy of the application, in pdf format, should be either sent to me at the address below or emailed to me at larry.frost@ncdenr.gov.
3. Drawing No.'s 1 and 2 of the application indicate that the leachate collection system (LCS) is piped to the *STORMWATER BASIN* and the proposed *Chimney Drains* are to be piped to the LCS. Leachate cannot be discharged as stormwater; it must be treated properly prior to discharge, typically as a portion of the NPDES permitted ash basin discharge. The Facility should provide additional information



Page 2

Duke Energy Belews Creek, FGD Landfill

July 1, 2011

regarding the collection, treatment and discharge of leachate from the FGD Landfill, to ensure leachate is being treated properly.

Should you have any questions regarding these matters you may contact me at (828) 296-4704 or at larry.frost@ncdenr.gov.

Sincerely,

A handwritten signature in black ink, appearing to read "Larry Frost".

Larry Frost
Environmental Engineer

cc: Kimberlee Benson – Duke Energy, 3195 Pine Hall Road, Belews Creek, NC 27009
Evan Andrews – Joyce Engineering
John Patron – SWS/WSRO



North Carolina Department of Environment and Natural Resources

Division of Waste Management

Dexter R. Matthews

Director

Beverly Eaves Perdue
Governor

Dee Freeman
Secretary

SOLID WASTE SECTION

March 26, 2012

Mr. Ed Sullivan, P.E., Waste Management and Remediation
Duke Energy of the Carolinas, LLC
EC13K/ Post Office Box 1006
Charlotte, North Carolina 28201-1006

Subject: Drawing OP-5, Cell Operation-Leachate Collection and Removal System – Revision Approval
Duke Energy of the Carolinas', Belews Creek Steam Station, FGD Residue Landfill
Stokes County, Permit No. 8505, DIN 16354

Dear Mr. Sullivan:

On March 23, 2012 the Division of Waste Management (Division) received Duke Energy's letter, entitled;

- *Belews Creek Steam Station FGD Landfill, NCDENR Permit # 85-05, Leachate System Modification.*
Prepared by Duke Energy. March 2012. DIN 16353.

The letter requests revision of that portion of the approved Plans that deals with the closing of the leachate collection system drain lines, found in Drawing OP-5, Cell Operation-Leachate Collection and Removal System. The revision requests that all drain lines be allowed to remain open.

The Division has reviewed the request and hereby approves the immediate implementation of the revision at Duke Energy of the Carolinas', Belews Creek Steam Station, FGD Residue Landfill, Permit No. 8505. The Facility should operate in this manner until the current permit is either amended or modified. Therefore, the next time the Facility prepares either a Permit amendment or modification it is expected to include the revised Drawing OP-5 (revised 3/19/2012) as part of the application.

Should you have any questions regarding this matter contact me at (828) 296-4704 or larry.frost@ncdenr.gov.

Sincerely,

Larry Frost
Environmental Engineer

cc: Sean DeNeale – Duke Energy
Hugh Jernigan – SWS/WSRO



Belews Creek Steam Station
3195 Pine Hall Road
Belews Creek, NC 27009
336-445-0610
336-669-2994

March 24, 2016

North Carolina Department of Environmental Quality
Division of Waste Management
Solid Waste Section
2090 U.S. Highway 70
Swannanoa, North Carolina 28778

Attn: Mr. Larry Frost

Re: Duke Energy Carolinas - Belews Creek Steam Station
FGD Residuals Landfill (Permit No. INDUS-8505)
Stokes County

Dear Mr. Frost,

Duke Energy Carolinas (DEC), Belews Creek Steam Station, requests concurrence from North Carolina Department of Environmental Quality (NCDEQ) Division of Waste Management (Division) of the Operations Plan for the Flue Gas Desulfurization (FGD) Residual Landfill (Permit No. INDUS-8505). The amended plan includes requirements for mining of waste, vacuum truck waste, and geotextile disposal.

This request is being submitted electronically. Please let me know if you would like to receive paper copies.

Respectfully submitted,

A handwritten signature in blue ink that reads "Melonie Y. Martin".

Melonie Martin
Environmental Services

Attachments: Operations Plan, Duke Energy Carolinas, Belews Creek Steam Station, FGD Residual Landfill

cc (via e-mail): Will Harrison, Duke
Evan Andrews, Duke
Ed Sullivan, Duke
Ed Mussler, NCDEQ